



POWER TOOLS ACCESSORIES CATALOGUE 2026/27

www.tactixtools.com

CONTENTS

Drilling Products

Drill Bits In Eco-Friendly Poly Bag	1-2
HSS Metal Drill Bits	3-7
Taps & Dies	8
Step Drill Bits	9-10
Concrete Drill Bits	11
Multi-Purpose Drill Bits & Glass Drill Bits	12
SDS Drill Bits & Chisels	13-14
Garden Auger Drill Bits	15
Wood Drill Bits & Wood Spades	16
Auger Drill Bits	17
Forstner Drill Bits & Counter Sink Bits	17-18
Pilot Drill bits & Carpentry Tools	18
Router Bits	19-20

Drilling & Driving Bits Set

Drilling & Driving Bits Set	21-26
Impact Screwdriver Bits Set	27-28
Interlock Range Set	29-30

Saw Blades & Hole Saws

Diamond Blades	31-33
Multi-purpose Diamond Blades & Diamond Grinding Wheel	34-36
Diamond Drill Bits & Hole Saws	37-38
Circular Saw Blades	40
Cutting Off & Grinding Wheels	41-42
Jig Saw Blades & Reciprocating Saw Blades	43-48
Bi-metal Hole Saws & Carbon Steel Hole Saws	49
Arbors For Hole Saws & Carbide Hole Saws	50
Multi Saw Blades	51-52

Power Bits & Accessories

Impact bits & Accessories	54-55
Power Bits sets	56-58
Driving Bits & Accessories	59-61

Abrasives

Sanding Discs, Sheets & Belts	62-64
Flap Disc	65
Polishing Accessories	66-67
Wire Brushes	68-72
Rotary Rasp & Strip Disc	73
Drill Brushes	74

Welding Accessories & Consumables

Welding Accessories	75-79
Welding Consumables	80

Drill Bits Display & Promotions

Drill Bits Display & Promotions	81
---------------------------------	----




HSS TWIST DRILL BITS



HSS COBALT TWIST DRILL BITS



HSS COBALT TWIST DRILL BITS

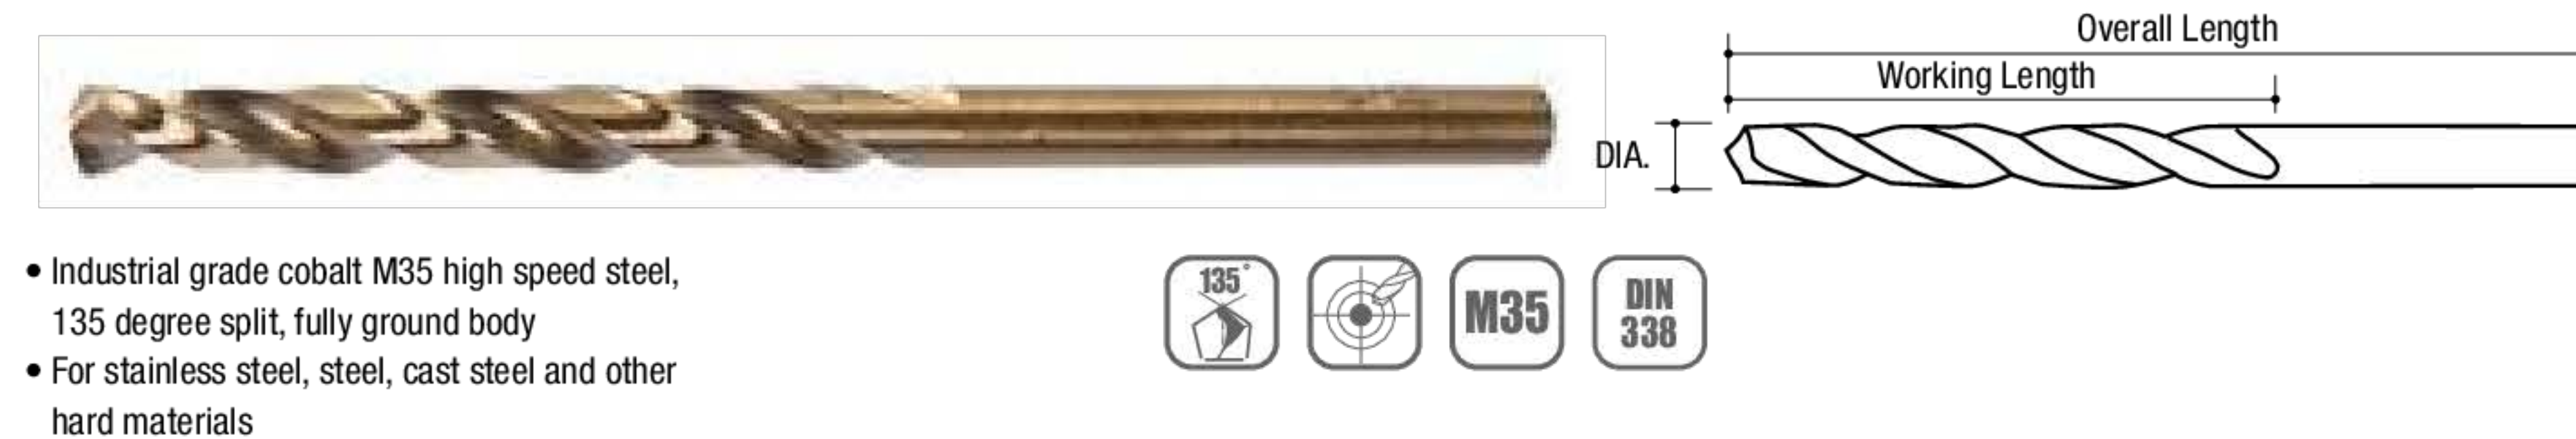


CONCRETE DRILL BITS




MULTI-PURPOSE DRILL BITS



HSS BRAD POINT WOOD DRILL BITS

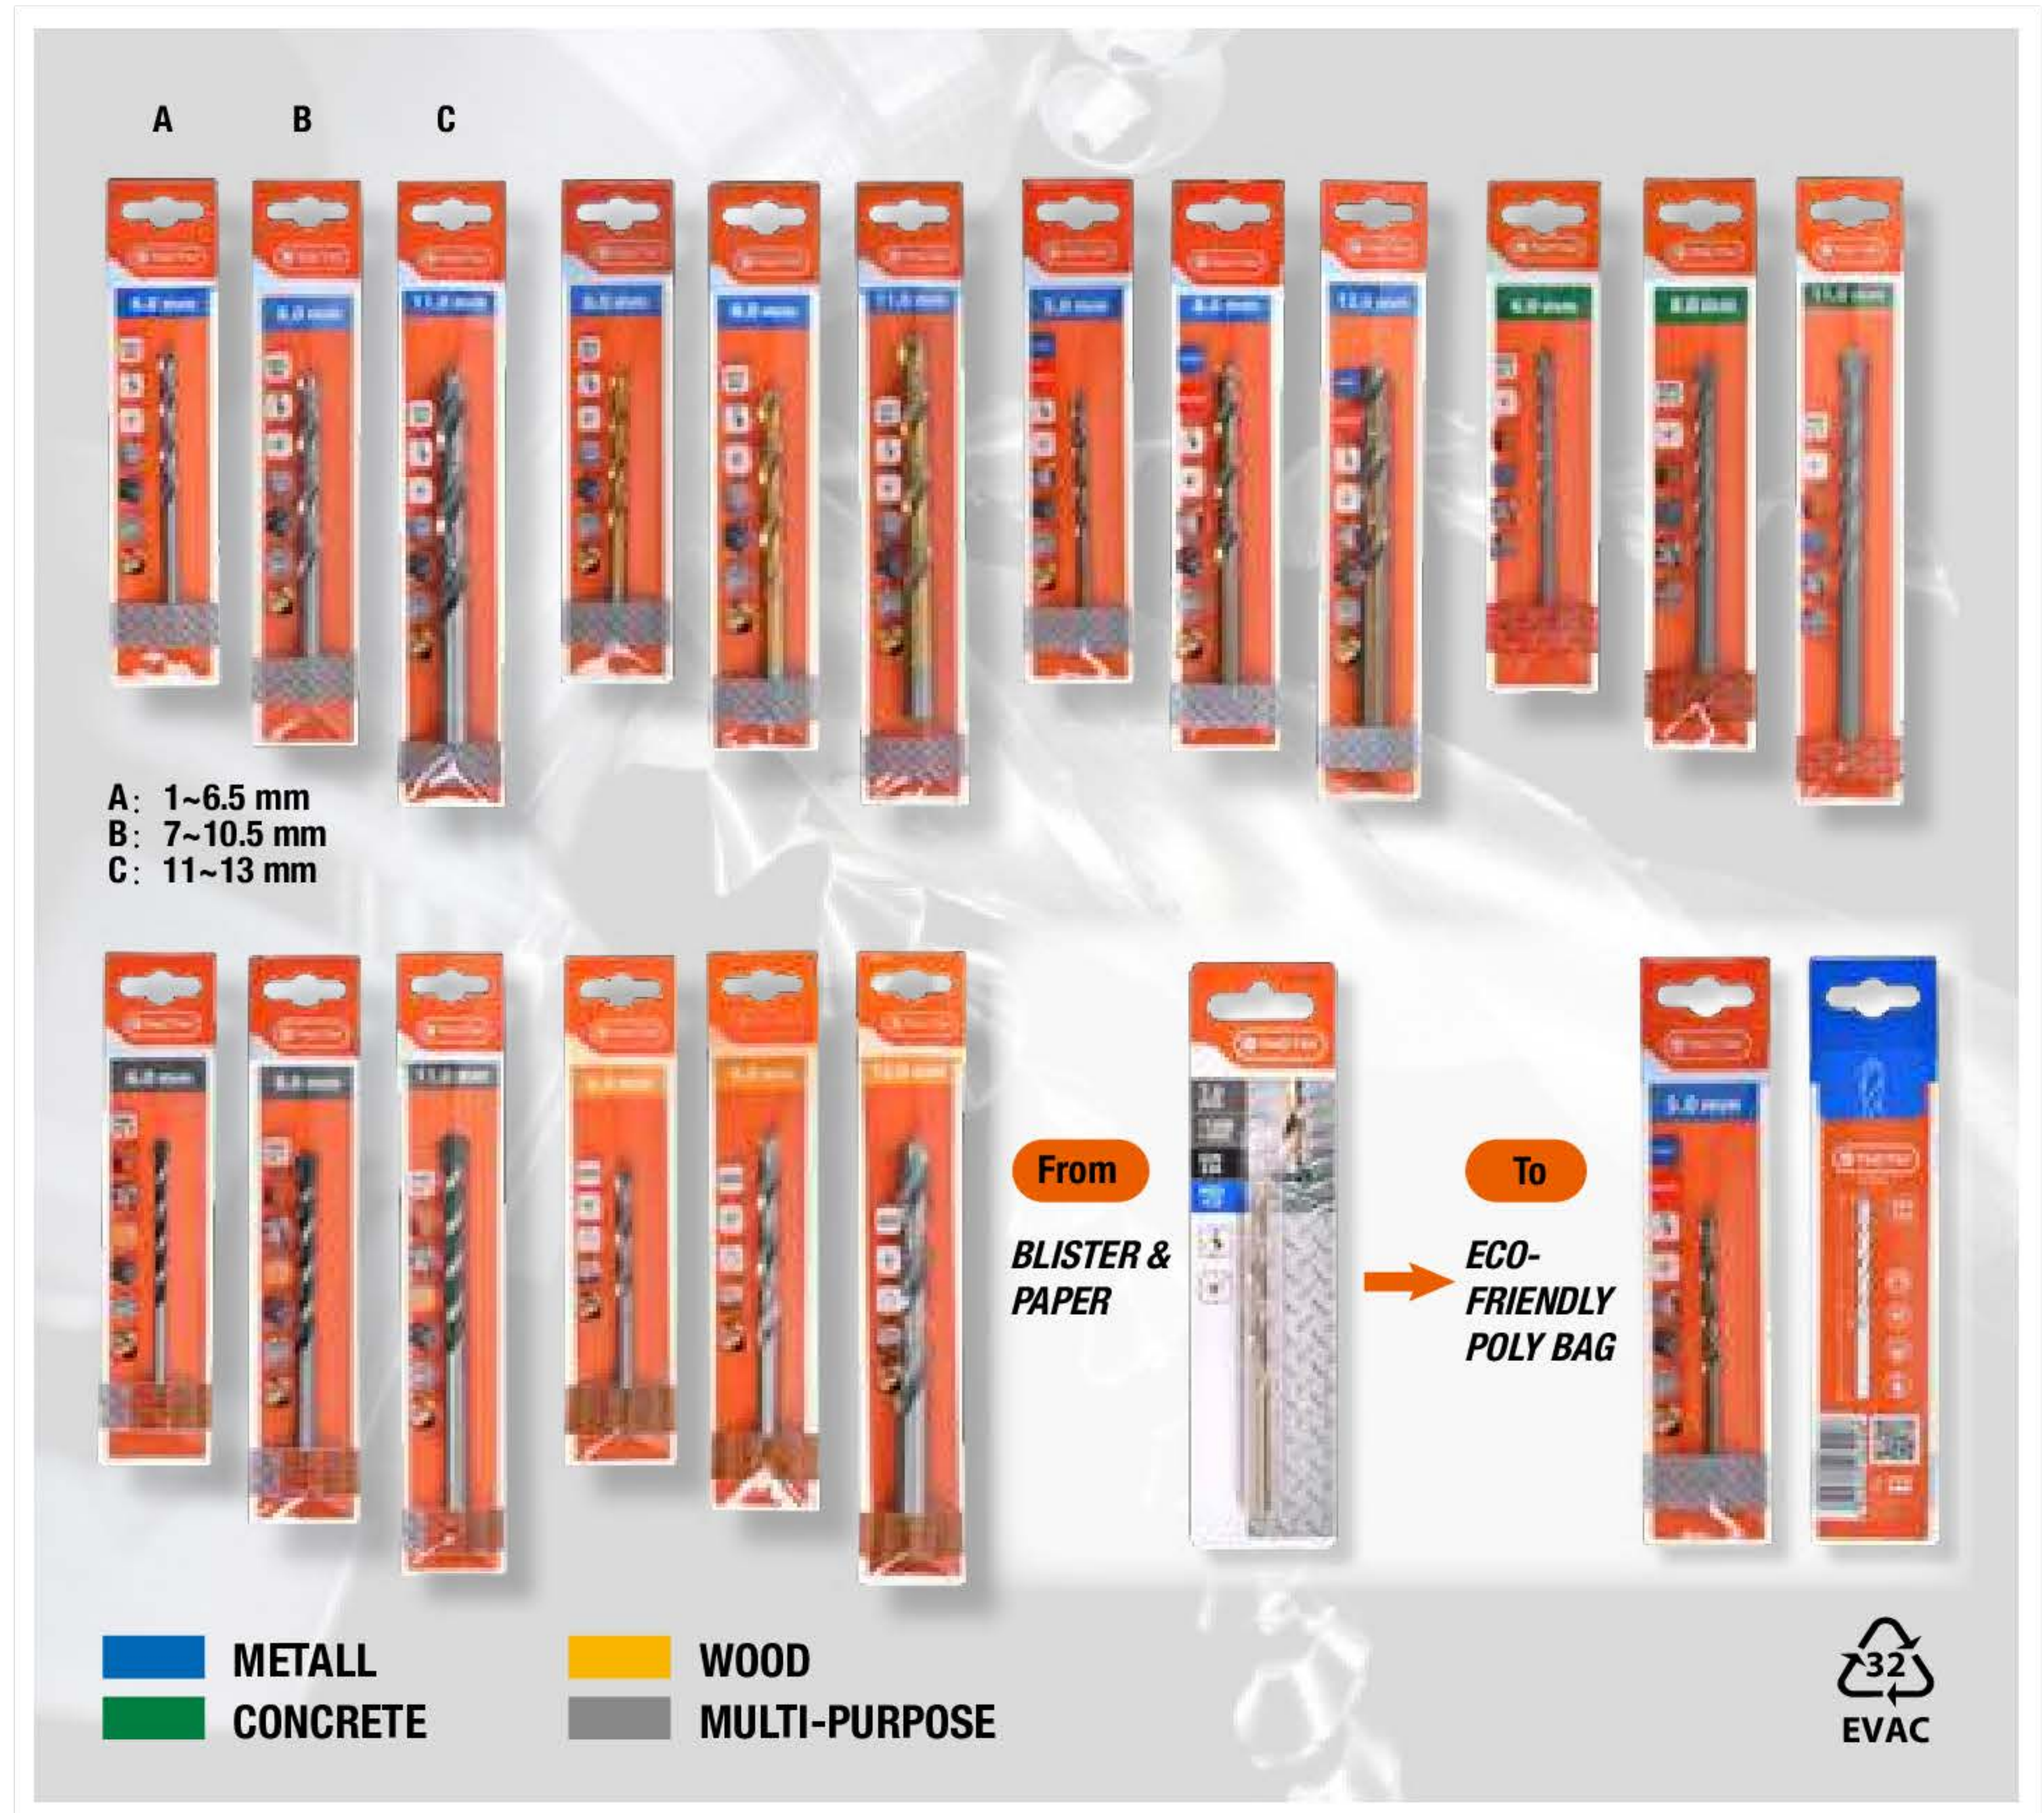


HSS TWIST DRILL BITS

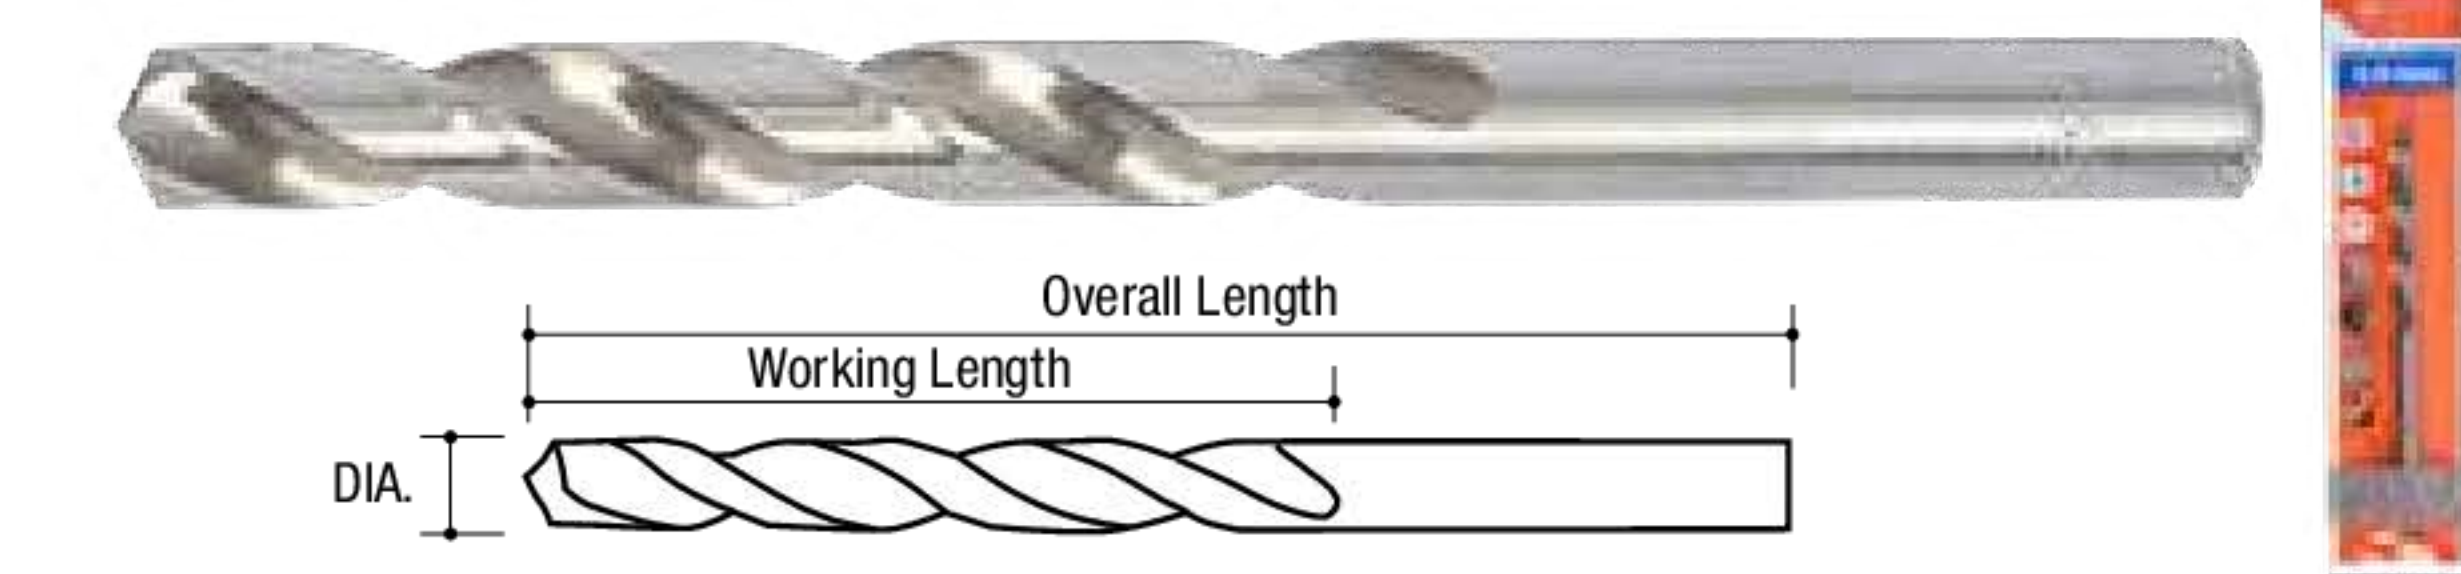

- Industry grade #6542 high speed steel material, 135 degree split, fully ground body
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410001	2 PC 1.0 mm	12 mm	34 mm	1952 1	20	200
410003	2 PC 1.5 mm	18 mm	40 mm	1953 8	20	200
410005	2 PC 2.0 mm	24 mm	49 mm	1954 5	20	200
410007	2 PC 2.5 mm	30 mm	57 mm	1955 2	20	200
410009	2 PC 3.0 mm	33 mm	61 mm	1956 9	20	200
410011	3.2 mm	36 mm	65 mm	1957 6	20	200
410013	3.5 mm	39 mm	70 mm	1958 3	20	200
410015	4.0 mm	43 mm	75 mm	1959 0	20	200
410017	4.2 mm	43 mm	75 mm	1960 6	20	200
410019	4.5 mm	47 mm	80 mm	1961 3	20	200
410021	4.8 mm	52 mm	86 mm	1962 0	20	200
410023	5.0 mm	52 mm	86 mm	1963 7	20	200
410025	5.5 mm	57 mm	93 mm	1964 4	20	120
410027	6.0 mm	57 mm	93 mm	1965 1	20	120
410029	6.5 mm	63 mm	101 mm	1966 8	20	120
410031	7.0 mm	69 mm	109 mm	1967 5	20	120
410033	7.5 mm	69 mm	109 mm	1968 2	20	120
410035	8.0 mm	75 mm	117 mm	1969 9	20	120
410037	8.5 mm	75 mm	117 mm	1970 5	20	120
410039	9.0 mm	81 mm	125 mm	1971 2	20	120
410041	9.5 mm	81 mm	125 mm	1972 9	20	120
410043	10.0 mm	87 mm	133 mm	1973 6	20	120
410045	10.5 mm	87 mm	133 mm	1974 3	20	120
410047	11.0 mm	94 mm	142 mm	1975 0	20	120
410051	12.0 mm	101 mm	151 mm	1977 4	20	120
410053	12.5 mm	101 mm	151 mm	1978 1	20	120
410055	13.0 mm	101 mm	151 mm	1979 8	20	120

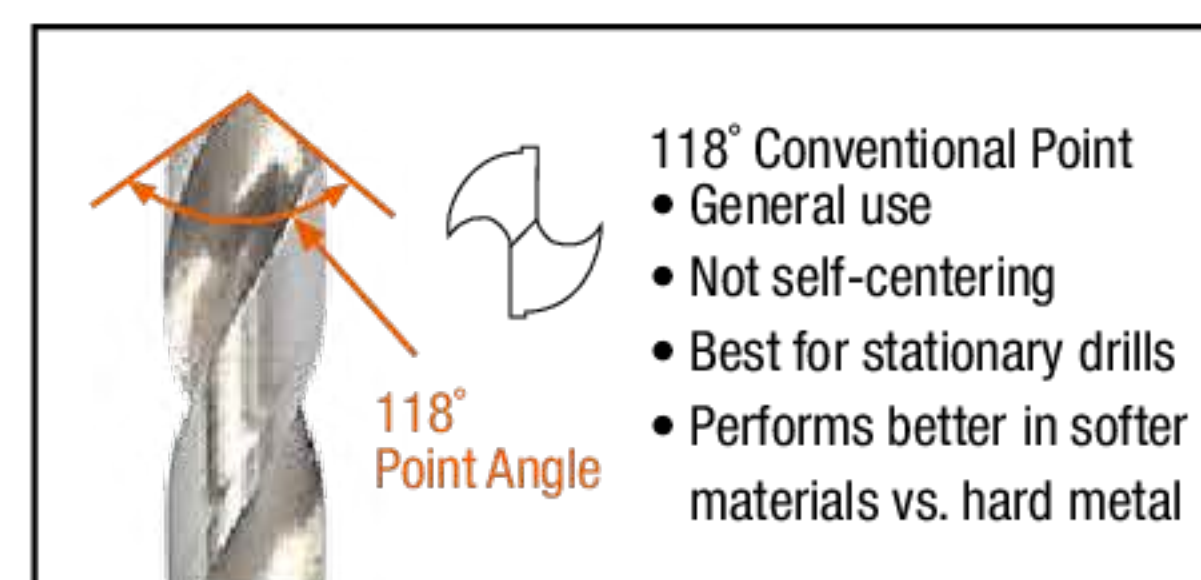

- 118° Conventional Point
- General use
- Not self-centering
- Best for stationary drills
- Performs better in softer materials vs. hard metal

HSS DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410482	13 PC Metric	1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5 mm	5915 2	6	36
410492	13 PC SAE	9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4 in.	5920 6	6	36



- 135° Split Point
- Self-centering (won't "walk")
- Best for portable drills
- Requires less force than 118°

Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410061	1/32 in.	3/8 in.	1-3/4 in.	6741 6	20	200
410062	1/16 in.	11/16 in.	1-9/16 in.	6742 3	20	200
410063	5/64 in.	1 in.	2 in.	6743 0	20	200
410064	3/32 in.	1-1/4 in.	2-1/4 in.	6744 7	20	200
410065	7/64 in.	1-1/2 in.	2-5/8 in.	6745 4	20	200
410066	1/8 in.	1-5/8 in.	2-3/4 in.	6746 1	20	200
410068	5/32 in.	2 in.	3-1/8 in.	6747 8	20	200
410070	3/16 in.	2-5/16 in.	3-1/2 in.	6748 5	20	200
410072	7/32 in.	2-1/2 in.	3-3/4 in.	6749 2	20	120
410074	1/4 in.	2-3/4 in.	4 in.	6750 8	20	120
410076	5/16 in.	3-3/16 in.	4-1/2 in.	6751 5	20	120
410078	3/8 in.	3-5/8 in.	5 in.	6752 2	20	120
410080	7/16 in.	4-1/16 in.	5-1/2 in.	6753 9	20	120
410082	1/2 in.	4-1/2 in.	6 in.	6754 6	20	120
410084	9/16 in.	4-1/4 in.	6-5/16 in.	6755 3	20	120
410086	5/8 in.	4-3/4 in.	7 in.	6756 0	10	60
410088	3/4 in.	5-5/16 in.	7-13/16 in.	6757 7	10	60

HSS DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410484	19 PC Metric	1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10 mm	5916 9	5	20
410494	21 PC SAE	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4, 17/64, 9/32, 19/64, 5/16, 21/64, 11/32, 23/64, 3/8 in.	5922 0	5	20

HSS DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410486	25 PC Metric	1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm	5918 3	5	10
410496	29 PC SAE	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4, 17/64, 9/32, 19/64, 5/16, 21/64, 11/32, 23/64, 3/8, 25/64, 13/32, 27/64, 7/16, 29/64, 15/32, 31/64, 1/2 in.	5924 4	5	10

5 PC HSS TWIST DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410081	5 PC HSS Twist Drill Bits	3816 4	10	60

13 PC HSS TWIST DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410085	13 PC HSS Twist Drill Bits	3817 1	10	60

19 PC HSS TWIST DRILL BITS




Item No.	Description	EAN 69426292+	Inner	Outer
410087	19 PC HSS Twist Drill Bits	4995 5	5	20

25 PC HSS TWIST DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410089	25 PC HSS Twist Drill Bits	5006 7	5	10

TI-COATED HSS TWIST DRILL BITS

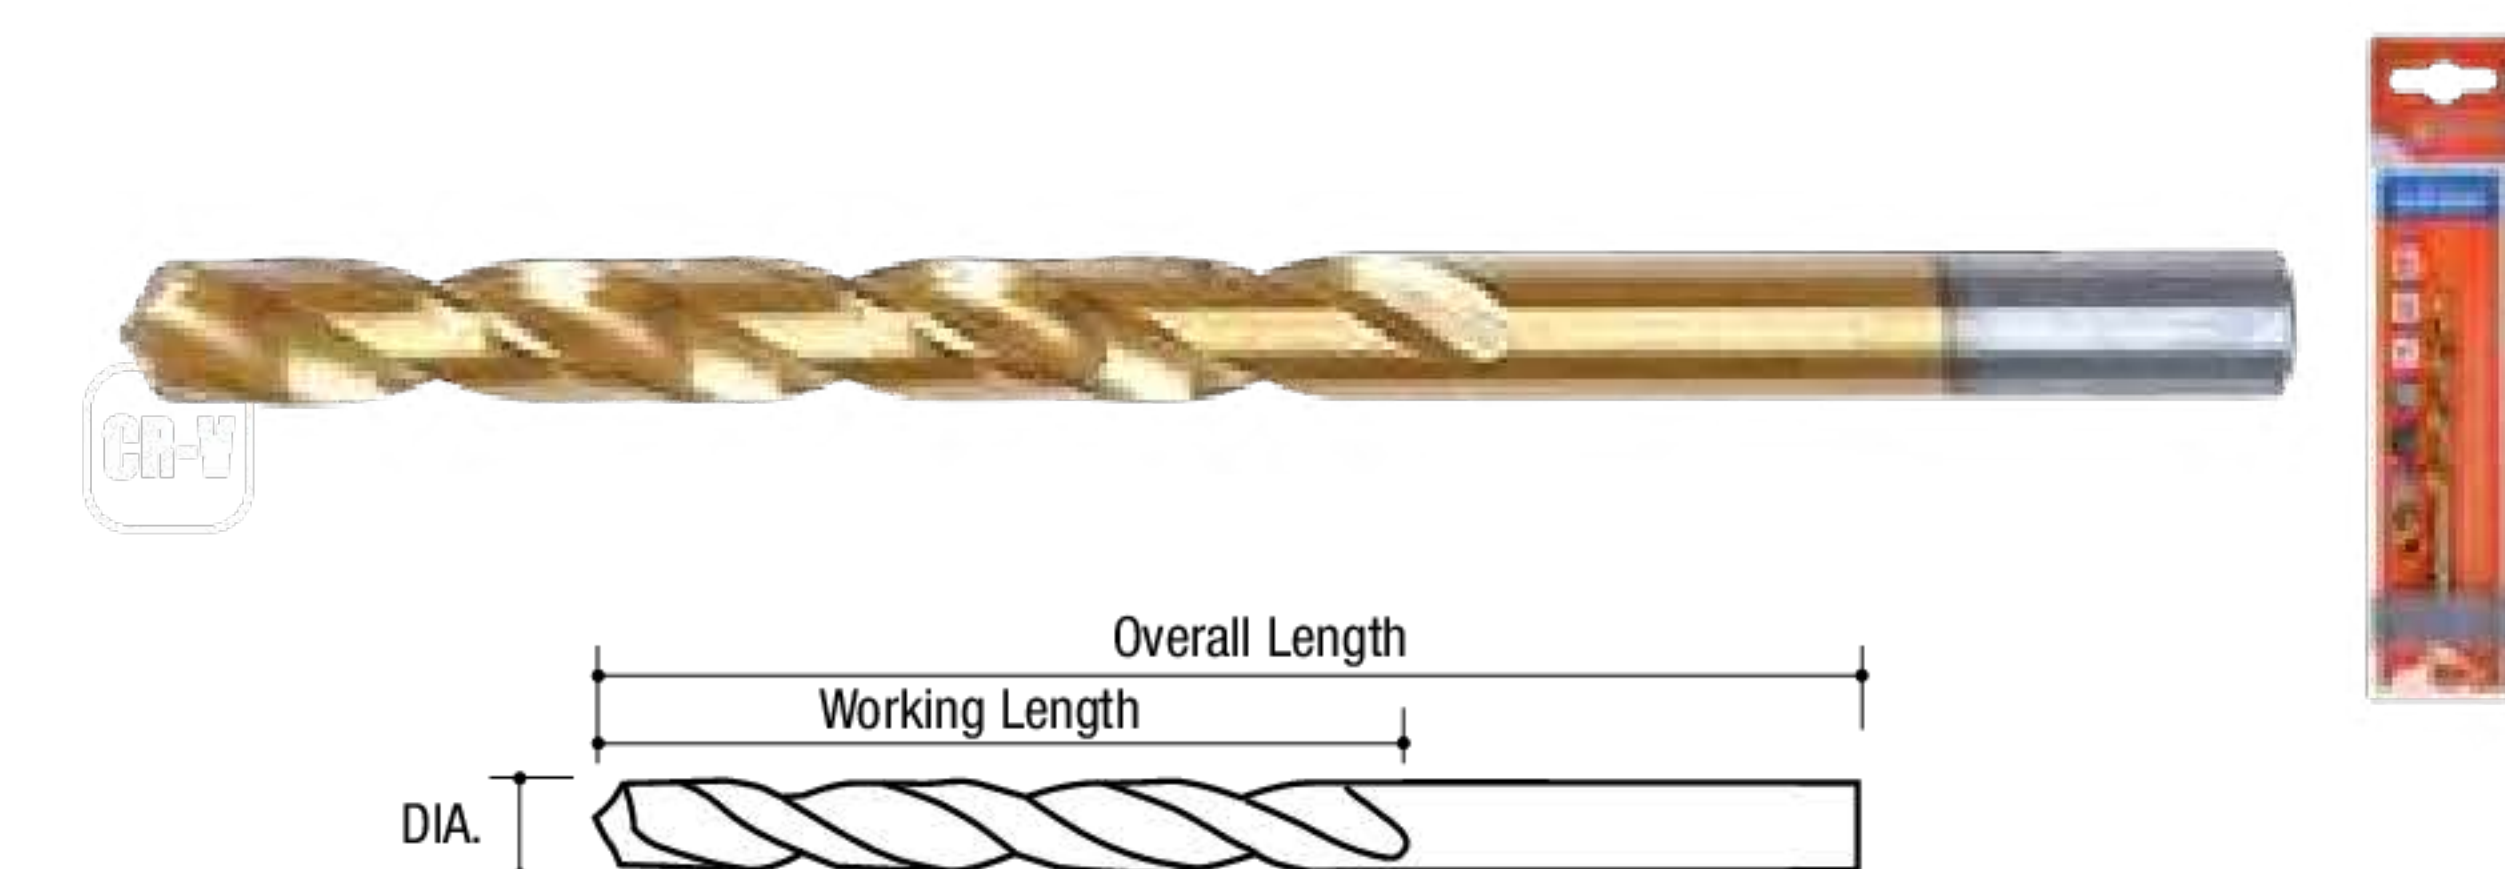

- Titanium coated for long life
- Industry grade #6542 high speed steel material, 135 degree split, fully ground body
- For steel, cast iron, malleable iron, non-ferrous metal and plastic

Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410101	2 PC 1.0 mm	12 mm	34 mm	1980 4	20	200
410103	2 PC 1.5 mm	18 mm	40 mm	1981 1	20	200
410105	2 PC 2.0 mm	24 mm	49 mm	1982 8	20	200
410107	2 PC 2.5 mm	30 mm	57 mm	1983 5	20	200
410109	2 PC 3.0 mm	33 mm	61 mm	1984 2	20	200
410111	3.2 mm	36 mm	65 mm	1985 9	20	200
410113	3.5 mm	39 mm	70 mm	1986 6	20	200
410115	4.0 mm	43 mm	75 mm	1987 3	20	200
410117	4.2 mm	43 mm	75 mm	1988 0	20	200
410119	4.5 mm	47 mm	80 mm	1989 7	20	200
410121	4.8 mm	52 mm	86 mm	1990 3	20	200
410123	5.0 mm	52 mm	86 mm	1991 0	20	200
410125	5.5 mm	57 mm	93 mm	1992 7	20	120
410127	6.0 mm	57 mm	93 mm	1993 4	20	120



TI-COATED HSS DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410483	13 PC Metric	1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5 mm	5850 6	6	36
410493	13 PC SAE	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4 in.	5921 3	6	36

TI-COATED HSS DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410485	19 PC Metric	1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10 mm	5917 6	5	20
410495	21 PC SAE	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4, 17/64, 9/32, 19/64, 5/16, 21/64, 11/32, 23/64, 3/8 in.	5923 7	5	20

TI-COATED HSS DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410487	25 PC Metric	1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm	5919 0	5	10
410497	29 PC SAE	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4, 17/64, 9/32, 19/64, 5/16, 21/64, 11/32, 23/64, 3/8, 25/64, 13/32, 27/64, 7/16, 29/64, 15/32, 31/64, 1/2 in.	5925 1	5	10

5 PC TI-COATED HSS TWIST DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410181	5 PC Ti-coated HSS Twist Drill Bits	3818 8	10	60

13 PC TI-COATED HSS TWIST DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410185	13 PC Ti-coated HSS Twist Drill Bits	3819 5	10	60

19 PC TI-COATED HSS TWIST DRILL BITS




Item No.	Description	EAN 69426292+	Inner	Outer
410187	19 PC Ti-coated HSS Twist Drill Bits	4996 2	5	20

25 PC TI-COATED HSS TWIST DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410189	25 PC Ti-coated HSS Twist Drill Bits	2738 0	5	10

HSS COBALT TWIST DRILL BITS

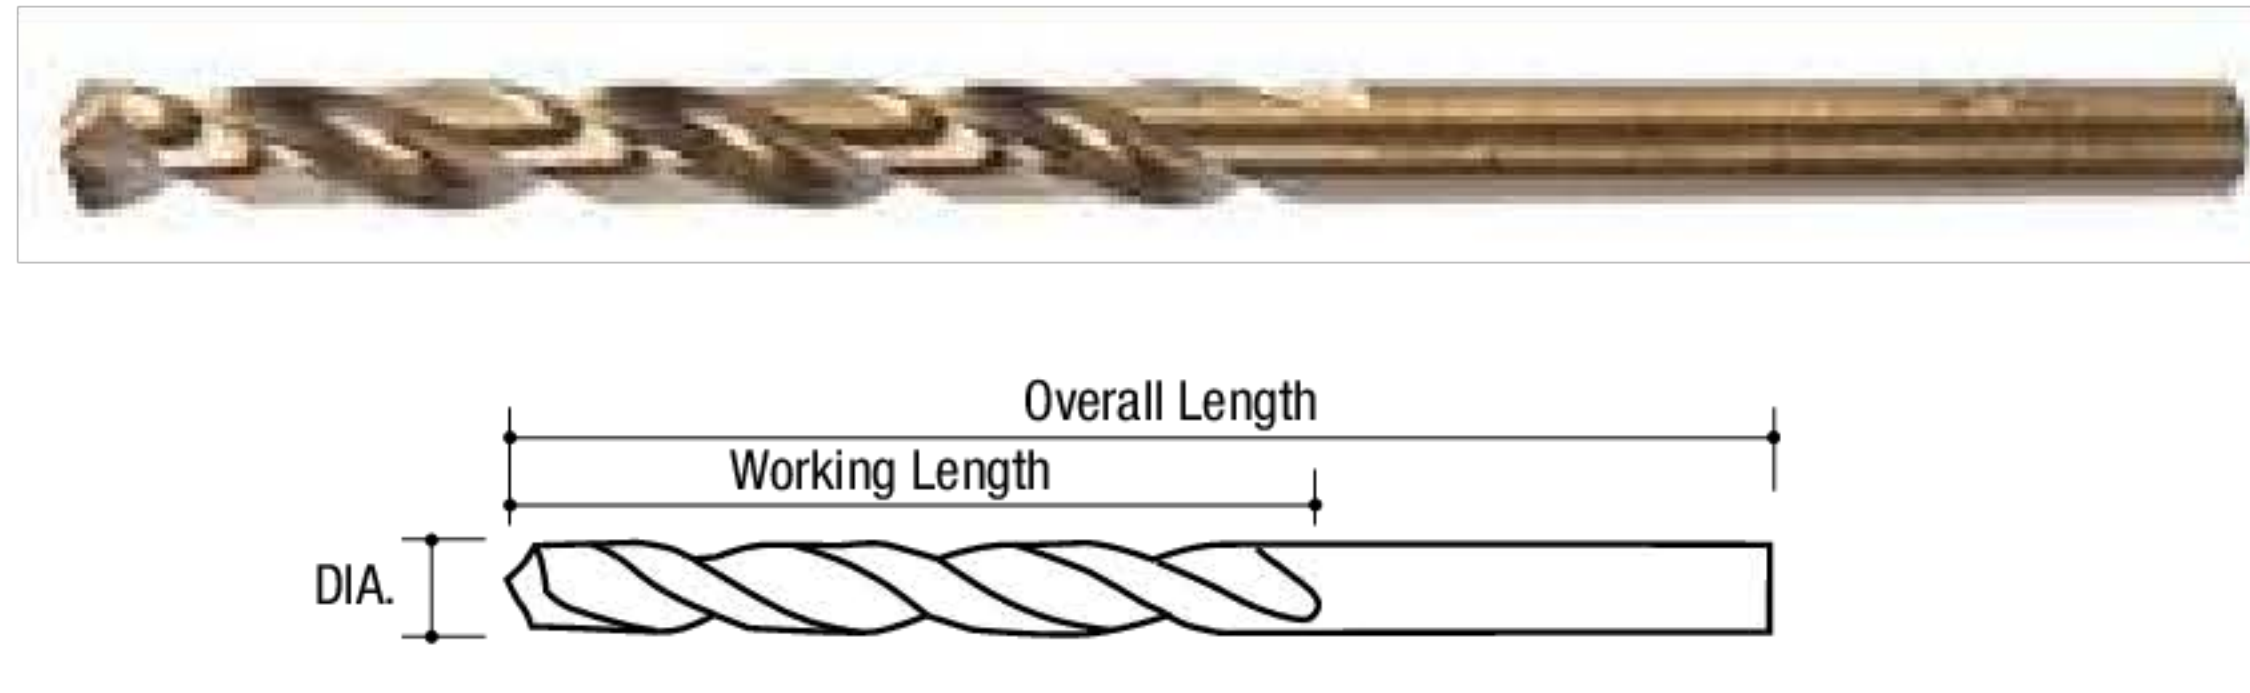

- Industrial grade cobalt M35 high speed steel, 135 degree split, fully ground body
- For stainless steel, steel, cast steel and other hard materials



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410370	2 PC 1.0 mm	12 mm	34 mm	6209 1	20	100
410371	2 PC 1.5 mm	18 mm	40 mm	6210 7	20	100
410372	2 PC 2.0 mm	24 mm	49 mm	6211 4	20	100
410373	2 PC 2.5 mm	30 mm	57 mm	6212 1	20	100
410374	2 PC 3.0 mm	33 mm	61 mm	6213 8	20	100
410375	3.2 mm	36 mm	65 mm	6214 5	20	100
410376	3.5 mm	39 mm	70 mm	6215 2	20	100
410377	4.0 mm	43 mm	75 mm	6216 9	20	100
410379	4.5 mm	47 mm	80 mm	6218 3	20	100
410381	5.0 mm	52 mm	86 mm	6220 6	20	100
410382	5.5 mm	57 mm	93 mm	6221 3	20	60
410383	6.0 mm	57 mm	93 mm	6222 0	20	60
410384	6.5 mm	63 mm	101 mm	6223 7	20	60
410385	7.0 mm	69 mm	109 mm	6224 4	20	60
410386	7.5 mm	69 mm	109 mm	6225 1	20	60
410387	8.0 mm	75 mm	117 mm	6226 8	20	60
410388	8.5 mm	75 mm	117 mm	6227 5	20	60
410389	9.0 mm	81 mm	125 mm	6228 2	20	60
410390	9.5 mm	81 mm	125 mm	6229 9	20	60
410391	10.0 mm	87 mm	133 mm	6230 5	20	60
410392	10.5 mm	87 mm	133 mm	6231 2	20	60
410393	11.0 mm	94 mm	142 mm	6232 9	20	60
410394	11.5 mm	94 mm	142 mm	6233 6	20	60
410395	12.0 mm	101 mm	151 mm	6234 3	20	60
410396	12.5 mm	101 mm	151 mm	6235 0	20	60
410397	13.0 mm	101 mm	151 mm	6236 7	20	60

HEX SHANK HSS TWIST DRILL BITS

- For steel, cast iron, malleable iron, non-ferrous metal and plastic
- Hex shank for quick change adapters and a more secure fit



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410203	2 PC 1.5 mm	18 mm	62 mm	4765 4	20	200
410205	2 PC 2.0 mm	24 mm	71 mm	4766 1	20	200
410207	2 PC 2.5 mm	30 mm	79 mm	4767 8	20	200
410209	2 PC 3.0 mm	33 mm	83 mm	4768 5	20	200
410211	3.5 mm	39 mm	92 mm	4769 2	20	200
410213	4.0 mm	43 mm	97 mm	4770 8	20	200
410215	4.5 mm	47 mm	102 mm	4771 5	20	200
410217	5.0 mm	52 mm	108 mm	4772 2	20	200
410219	5.5 mm	57 mm	115 mm	4773 9	20	200
410221	6.0 mm	57 mm	115 mm	4774 6	20	200
410223	6.5 mm	63 mm	123 mm	4775 3	20	200

Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410411	2 PC 1/32 in.	3/8 in.	1-3/4 in.	6528 3	20	100
410413	2 PC 1/16 in.	11/16 in.	1-9/16 in.	6529 0	20	100
410414	2 PC 5/64 in.	1 in.	2 in.	6530 6	20	100
410415	2 PC 3/32 in.	1-1/4 in.	2-1/4 in.	7216 8	20	100
410416	7/64 in.	1-1/2 in.	2-5/8 in.	7217 5	20	100
410417	1/8 in.	1-5/8 in.	2-3/4 in.	7218 2	20	100
410418	9/64 in.	1-3/4 in.	2-7/8 in.	7219 9	20	100
410419	5/32 in.	2 in.	3-1/8 in.	7220 5	20	100
410421	3/16 in.	2-5/16 in.	3-1/2 in.	7221 2	20	100
410423	7/32 in.	2-1/2 in.	3-3/4 in.	7222 9	20	60
410425	1/4 in.	2-3/4 in.	4 in.	7223 6	20	60
410429	5/16 in.	3-3/16 in.	4-1/2 in.	7224 3	20	60
410433	3/8 in.	3-5/8 in.	5 in.	7225 0	20	60
410437	7/16 in.	4-1/16 in.	5-1/2 in.	7226 7	20	60
410441	1/2 in.	4-1/2 in.	6 in.	7227 4	20	60



HEX SHANK TI-COATED HSS TWIST DRILL BITS

- Titanium coated for long life
- For steel, cast iron, malleable iron, non-ferrous metal and plastic
- Hex shank for quick change adapters and a more secure fit



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410253	2 PC 1.5 mm	18 mm	62 mm	4776 0	20	200
410255	2 PC 2.0 mm	24 mm	71 mm	4777 7	20	200
410257	2 PC 2.5 mm	30 mm	79 mm	4778 4	20	200
410259	2 PC 3.0 mm	33 mm	83 mm	4779 1	20	200
410261	3.5 mm	39 mm	92 mm	4780 7	20	200
410263	4.0 mm	43 mm	97 mm	4781 4	20	200
410265	4.5 mm	47 mm	102 mm	4782 1	20	200
410267	5.0 mm	52 mm	108 mm	4783 8	20	200
410269	5.5 mm	57 mm	115 mm	4784 5	20	200
410271	6.0 mm	57 mm	115 mm	4785 2	20	200
410273	6.5 mm	63 mm	123 mm	4786 8	20	200

COBALT DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410488	13 PC Metric	1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5 mm	6313 5	6	36
410498	13 PC SAE	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4 in.	6315 9	6	36

COBALT DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410489	25 PC Metric	1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm	6314 2	5	10

COBALT DRILL METAL CASE SET



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410499	29 PC SAE	1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 15/64, 1/4, 17/64, 9/32, 19/64, 5/16, 21/64, 11/32, 23/64, 3/8, 25/64, 13/32, 27/64, 7/16, 29/64, 15/32, 31/64, 1/2 in.	6316 6	5	10

15 PC HSS COBALT DRILL SET



- Contents: 1.5, 1.5, 2.0, 2.0, 2.5, 2.5, 3.0, 3.2, 3.5, 4.0, 4.5, 5.0, 6.0, 8.0, 10.0 mm
- Industrial grade cobalt M35 high speed steel, 135 degree split, fully ground body.
- For stainless steel, steel, cast steel and other hard materials.

Item No.	Description	EAN 69426292+	Inner	Outer
418014P	15 PC HSS Cobalt Drill Set	6734 8	6	24



HSS TWIST DRILL BITS WITH POUCH-METRIC

- High speed steel material, 118 degree split, roll-forged
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410001BM	10 PC 1.0 mm	12 mm	34 mm	5670 0	36	72
410009BM	10 PC 3.0 mm	33 mm	61 mm	5674 8	36	72
410011BM	10 PC 3.2 mm	36 mm	65 mm	5675 5	36	72
410015BM	10 PC 4.0 mm	43 mm	75 mm	5677 9	36	72
410017BM	10 PC 4.2 mm	47 mm	80 mm	5678 6	36	72
410021BM	10 PC 4.8 mm	52 mm	86 mm	5680 9	36	72
410023BM	10 PC 5.0 mm	52 mm	86 mm	5681 6	36	72
410027BM	10 PC 6.0 mm	57 mm	93 mm	5683 0	30	60
410035BM	10 PC 8.0 mm	75 mm	117 mm	5687 8	24	48
410041BM	10 PC 9.5 mm	81 mm	125 mm	5690 8	18	36
410043BM	5 PC 10.0 mm	87 mm	133 mm	5691 5	24	48
410049BM	5 PC 11.5 mm	94 mm	142 mm	5694 6	18	36
410051BM	5 PC 12.0 mm	101 mm	151 mm	5695 3	18	36
410053BM	5 PC 12.5 mm	101 mm	151 mm	5696 0	18	36
410056BM	5 PC 10.0 mm	108 mm	160 mm	8397 3	18	36
410062BM	5 PC 20.0 mm	140 mm	205 mm	8398 0	10	20

HSS TI-COATED TWIST DRILL BITS WITH POUCH-METRIC

- High speed steel material, 118 degree split, roll-forged
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410111BM	10 PC 3.2 mm	36 mm	65 mm	5732 5	36	72
410115BM	10 PC 4.0 mm	43 mm	75 mm	5734 9	36	72
410117BM	10 PC 4.2 mm	47 mm	80 mm	5735 6	36	72
410121BM	10 PC 4.8 mm	52 mm	86 mm	5737 0	36	72
410127BM	10 PC 6.0 mm	57 mm	93 mm	5740 0	30	60
410143BM	5 PC 10.0 mm	87 mm	133 mm	5748 6	24	48
410149BM	5 PC 11.5 mm	94 mm	142 mm	5751 6	18	36
410151BM	5 PC 12.0 mm	101 mm	151 mm	5752 3	18	36
410153BM	5 PC 12.5 mm	101 mm	151 mm	5753 0	18	36

HSS COBALT TWIST DRILL BITS WITH POUCH-METRIC

- Industrial grade cobalt M35 high speed steel, 135 degree split, fully ground body
- For stainless steel, steel, cast steel and other hard materials



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410370BM	10 PC 1.0 mm	12 mm	34 mm	6288 6	36	72
410371BM	10 PC 1.5 mm	18 mm	40 mm	6289 3	36	72
410372BM	10 PC 2.0 mm	24 mm	49 mm	6290 9	36	72
410373BM	10 PC 2.5 mm	30 mm	57 mm	6291 6	36	72
410374BM	10 PC 3.0 mm	33 mm	61 mm	6292 3	36	72
410376BM	10 PC 3.5 mm	39 mm	70 mm	6293 0	36	72
410379BM	10 PC 4.5 mm	47 mm	80 mm	62954	36	72
410382BM	10 PC 5.5 mm	57 mm	86 mm	6297 8	30	60
410383BM	10 PC 6.0 mm	57 mm	86 mm	6298 5	30	60
410384BM	10 PC 6.5 mm	63 mm	101 mm	6299 2	30	60
410385BM	10 PC 7.0 mm	69 mm	109 mm	6300 5	24	48
410386BM	10 PC 7.5 mm	69 mm	109 mm	6301 2	24	48
410387BM	10 PC 8.0 mm	75 mm	117 mm	6302 9	24	48
410388BM	10 PC 8.5 mm	75 mm	117 mm	6303 6	24	48
410389BM	10 PC 9.0 mm	81 mm	125 mm	6304 3	18	36
410390BM	10 PC 9.5 mm	81 mm	125 mm	6305 0	18	36
410391BM	5 PC 10.0 mm	87 mm	133 mm	6306 7	18	36
410392BM	5 PC 10.5 mm	87 mm	133 mm	6307 4	18	36
410393BM	5 PC 11.0 mm	94 mm	142 mm	6308 1	18	36
410395BM	5 PC 12.0 mm	101 mm	151 mm	6310 4	18	36
410396BM	5 PC 12.5 mm	101 mm	151 mm	6311 1	18	36
410397BM	5 PC 13.0 mm	101 mm	151 mm	6312 8	18	36



HSS TWIST DRILL BITS WITH POUCH-SAE

- High speed steel material, 118 degree split, roll-forged
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
41000BS	10 PC 1/32 in.	1/2 in.	1-3/8 in.	0222 6	36	72
410005BS	10 PC 3/32 in.	32 mm	57 mm	5700 4	36	72
410009BS	10 PC 1/8 in.	41 mm	70 mm	5702 8	36	72
410013BS	10 PC 5/32 in.	51 mm	79 mm	5704 2	36	72
410017BS	10 PC 3/16 in.	59 mm	89 mm	5706 6	36	72
410025BS	10 PC 1/4 in.	70 mm	105 mm	5710 3	30	60
410033BS	10 PC 5/16 in.	81 mm	114 mm	5714 1	24	48
410041BS	10 PC 3/8 in.	92 mm	127 mm	5718 9	18	36
410047BS	5 PC 27/64 in.	100 mm	137 mm	5721 9	24	48
410051BS	5 PC 29/64 in.	106 mm	143 mm	5723 3	18	36
410055BS	5 PC 31/64 in.	111 mm	149 mm	5725 7	18	36
410057BS	5 PC 1/2 in.	114 mm	152 mm	5726 4	18	36
410058BS	5 PC 17/32 in.	64 mm	95 mm	8399 7	10	20
410059BS	5 PC 9/16 in.	120 mm	168 mm	8402 4	10	20
410062BS	5 PC 13/16 in.	140 mm	208 mm	8400 0	10	20

SCREW EXTRACTORS SET

- 1/4 " Hex shank for using with cordless and electric power drills
- Tough high speed steel for removing damaged nails and steel nails.
- Self-centering and not walking

Item No.	Description	EAN 69426292+	Inner	Outer
421905	#0, #1, #2, #3, #4	8390 4	25	50

HSS TI-COATED TWIST DRILL BITS WITH POUCH-SAE

- High speed steel material, 118 degree split, roll-forged
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410109BS	10 PC 1/8 in.	41 mm	70 mm	5759 2	36	72
410113BS	10 PC 5/32 in.	51 mm	79 mm	5761 5	36	72
410117BS	10 PC 3/16 in.	59 mm	89 mm	5763 9	36	72
410125BS	10 PC 1/4 in.	70 mm	105 mm	5767 7	30	60
410131BS	10 PC 19/64 in.	78 mm	111 mm	5770 7	24	48
410133BS	10 PC 5/16 in.	81 mm	114 mm	5771 4	24	48
410135BS	10 PC 21/64 in.	84 mm	117 mm	5772 1	24	48
410139BS	10 PC 23/64 in.	89 mm	124 mm	5774 5	18	36
410143BS	5 PC 25/64 in.	95 mm	130 mm	5776 9	24	48
410145BS	5 PC 13/32 in.	98 mm	133 mm	5777 6	24	48
410147BS	5 PC 27/64 in.	100 mm	137 mm	5778 3	24	48
410151BS	5 PC 29/64 in.	106 mm	143 mm	5780 6	18	36
410153BS	5 PC 15/32 in.	110 mm	146 mm	5781 3	18	36
410155BS	5 PC 31/64 in.	111 mm	149 mm	5782 0	18	36
410157BS	5 PC 1/2 in.	114 mm	152 mm	5783 7	18	36



HSS ROLL FORGE TWIST DRILL BITS

- High speed steel material, 118 degree point angle, roll-forged, black oxide finish
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410303	2 PC 1.5 mm	18 mm	40 mm	4926 9	20	100
410304	2 PC 2.0 mm	24 mm	49 mm	4927 6	20	100
410305	2 PC 2.5 mm	30 mm	57 mm	4928 3	20	100
410306	2 PC 3.0 mm	33 mm	61 mm	4929 0	20	100
410310	4.0 mm	43 mm	75 mm	4930 6	20	100
410314	5.0 mm	52 mm	86 mm	4931 3	20	100
410315	5.5 mm	57 mm	93 mm	4932 0	20	100
410316	6.0 mm	57 mm	93 mm	4933 7	20	100
410320	8.0 mm	75 mm	117 mm	4934 4	20	100
410324	10.0 mm	87 mm	133 mm	4935 1	20	100

LONG METAL DRILL

- Industry grade #6542 high speed steel material, 118 degree split
- No clamping in drill hole, good chip removal
- For drilling through walls as well as boards, beams, floor boards made of soft and hard wood
- Also suitable for facade and as a roofer's drill bit for metal, profile sheets etc



Item No.	DIA.	Working Length	Shank DIA.	Overall Length	EAN 69426292+	Inner	Outer
410346	6 mm	90 mm	5 mm	400 mm	5448 5	10	40
410348	8 mm	90 mm	6 mm	400 mm	5449 2	10	40
410350	10 mm	90 mm	8 mm	400 mm	5450 8	10	40
410352	12 mm	90 mm	8 mm	400 mm	5451 5	10	40
410354	14 mm	90 mm	10 mm	400 mm	5452 2	10	20
410356	16 mm	90 mm	10 mm	400 mm	5453 9	10	20
410358	18 mm	90 mm	10 mm	400 mm	5454 6	10	20
410360	20 mm	90 mm	12 mm	400 mm	5455 3	10	20
410362	22 mm	90 mm	12 mm	400 mm	5456 0	10	20
410364	24 mm	90 mm	12 mm	400 mm	5457 7	10	20

TAP WITH HSS DRILL BIT SET

- Convenient tap and HSS drill bit set
- Ideal for general purpose threading



Item No.	Tap Size	Working Length	Overall Length	Drill Size	EAN 69426292+	Inner	Outer
421001	3x0.5	18	46	2.5	0245 5	10	60
421003	3x0.6	18	46	2.4	8438 3	10	60
421005	4x0.7	20	52	3.3	0246 2	10	60
421007	4x0.75	20	52	3.25	8439 0	10	60
421009	5x0.8	22	60	4.2	0247 9	10	60
421011	5x0.9	22	60	4.1	8440 6	10	60
421013	6x1.0	24	62	5	0267 7	10	60
421015	6x0.75	24	62	5.25	8345 4	10	60
421017	7x1.0	25	65	6	8441 3	10	60
421019	7x0.75	25	65	6.25	8442 0	10	60
421021	8x1.25	28	70	6.75	0268 4	10	60
421023	8x1.0	28	70	7	8443 7	10	60
421025	10x1.5	30	75	8.5	0269 1	10	60
421027	10x1.25	30	75	8.75	0270 7	10	60
421029	12x1.75	40	80	10.25	0271 4	10	60
421031	12x1.5	40	80	10.5	0272 1	10	60
421051	4-40	14	47	3/32 in.	8444 4	10	60
421053	6-32	17	50	7/64 in.	8445 1	10	60
421055	8-32	19	54	9/64 in.	8446 8	10	60
421057	10-24	22	60	5/32 in.	8447 5	10	60
421059	10-32	22	60	5/32 in.	8448 2	10	60
421061	12-24	23	60	11/64 in.	8449 9	10	60
421063	1/4-20	25	63	13/64 in.	8450 5	10	60
421065	1/4-28	25	63	7/32 in.	8451 2	10	60
421067	5/16-18	28	70	17/64 in.	8452 9	10	60
421069	5/16-24	28	70	9/32 in.	8453 6	10	60
421071	3/8-16	33	75	5/16 in.	8454 3	10	60
421073	3/8-24	33	75	21/64 in.	8346 1	10	60
421075	7/16-14	36	80	3/8 in.	8455 0	10	60
421077	7/16-20	36	80	25/64 in.	8456 7	10	60
421079	1/2-13	40	85	27/64 in.	8457 4	10	60
421081	1/2-20	40	85	29/64 in.	8347 8	10	60
421083	1/8-27	19	54	23/64 in.	8458 1	10	60

COMBINATION DRILL TAP BIT

- M2 high speed steel offering high hardness, wear resistance, and good toughness
- Titanium coating provides excellent corrosion resistance
- Use for drilling and tapping on aluminum, alloy steel, ordinary steel, cast iron, non-ferrous metals, hard plastics, etc
- Flutes on the screw tap help to remove chips and debris from the hole
- Hex shank for quick change adapters and a more secure fit



Item No.	Size	EAN 69777135+	Inner	Outer
421100	M3 x 0.5	1559 3	12	72
421101	M4 x 0.7	1560 9	12	72
421102	M5 x 0.8	1561 6	12	72
421103	M6 x 1.0	1562 3	12	72
421104	M8 x 1.25	1563 0	12	48
421105	M10 x 1.5	1564 7	12	48
421106	M12 x 1.75	1565 4	12	48

7 PC DIE WITH WRENCH METRIC SET

- Ideal for maintenance and repair work
- Hexagon shape provides more grip



Specification	Diameter	Pitch	S	E
M3 x 0.5	3	0.5	18	5
M4 x 0.7	4	0.7	18	5
M5 x 0.8	5	0.8	18	7
M6 x 1	6	1	18	7
M7 x 1	7	1	21	9
M8 x 1.25	8	1.25	21	9

Item No.	Description	Size	EAN 69426292+	Inner	Outer
421301	7 PC	M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1.0, M7 x 1.0, M8 x 1.25	0728 3	12	48
421311	7 PC	4-40, 6-32, 8-32, 10-24, 12-24, 1/4-20	8348 5	12	48

7 PC TAP WITH WRENCH

- Ideal for general purpose threading



Specification	Diameter (D)	Pitch	Working Length (L)	Shank (d1)
M3 x 0.5	3	0.5	18.2	43.8
M4 x 0.7	4	0.7	21.3	48.6
M5 x 0.8	5	0.8	24.3	56.5
M6 x 1	6	1	25.3	57.7
M7 x 1	7	1	27.4	65
M8 x 1.25	8	1.25	28.6	70

Item No.	Description	Size	EAN 69426292+	Inner	Outer
421303	7 PC	M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1.0, M7 x 1.0, M8 x 1.25	0727 6	12	48
421313	7 PC	4-40, 6-32, 8-32, 10-24, 12-24, 1/4-20	8459 8	12	48

13 PC TAP & DIE SET

- Ideal for general purpose threading



Item No.	Description	Size	EAN 69426292+	Inner	Outer
421601	13 PC	6-32, 8-32, 10-24, 10-32, 1/4-20, 5/16-18	0804 4	6	12
421603	13 PC	M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1.0, M7 x 1.0, M8 x 1.25	0729 0	6	12

RACHET T-HANDLE FOR TAP

- Quick, efficient ratcheting action
- Designed for use with taps



Item No.	Size	EAN 69426292+	Inner	Outer
421161	M3-M8	0717 7	12	48
421163	M5-M12	0726 9	12	48

60 PC METRIC AND SAE TAP & DIE SET




M3 x 0.5, M4 x 0.7, M5 x 0.8, M6 x 1.0, M7 x 1.0, M8 x 1.25, M9 x 1.25, M10 x 1.0, M10 x 1.5, M12 x 1.75, 4-40, 6-32, 8-32, 10-24, 10-32, 12-24, 1/4 -20, 1/4-28, 5/16-18, 5/16-24, 3/8-16, 3/8-24, 7/16-14, 7/16-20, 1/2-13, 1/2 -20, 1/8-27

Item No.	Description	Size	EAN 69426292+	Inner	Outer
421660	60 PC		0730 6	0	5



HSS STEP DRILL BITS

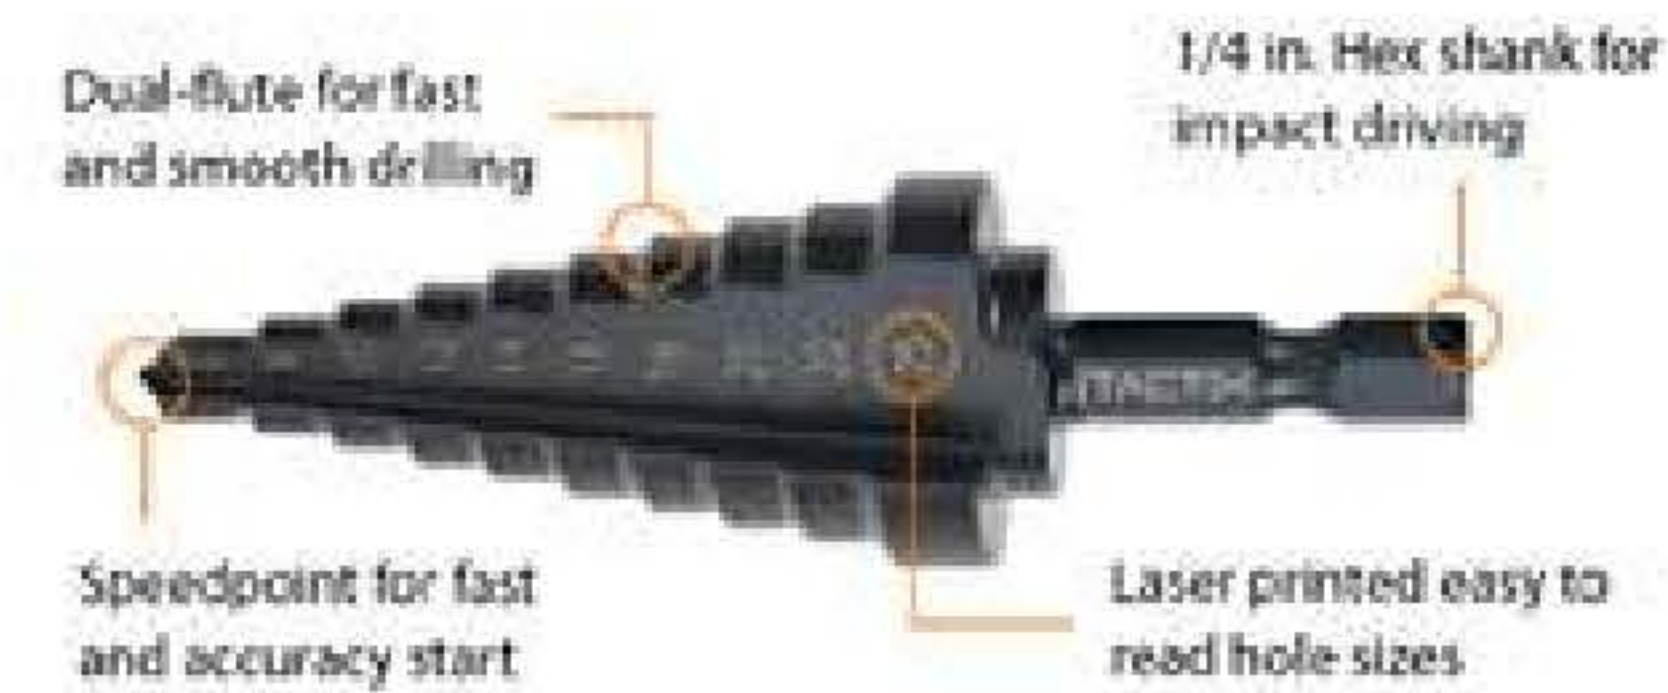

HSS-COBALT STEP DRILL PRO GRADE

- Industrial grade cobalt M35 high speed steel
- Automatically debur holes
- 4x long using life time
- For drilling multiple hole sizes with one bit in steel, brass, stainless steel, copper, aluminum, wood and plastic
- Black nitriding for extra hardness and rust prevention

Item No.	Shank DIA.	Holes	Size	EAN 69426292 (A) 69743345 (B)	Inner	Outer
416001	6.35 mm (1/4 in.)	9	ø 4-12 mm	A + 2308 5	12	48
416005	6.35 mm (1/4 in.)	9	ø 4-20 mm	A + 2310 8	12	48
416015	6.35 mm (1/4 in.)	8	ø 6-20 mm	A + 2315 3	12	48
416017	6.35 mm (1/4 in.)	10	ø 6-25 mm	B + 5335 5	12	48
416019	13.0 mm (9/16 in.)	13	ø 5-35 mm	A + 2317 7	12	48
416027	6.35 mm (1/4 in.)	13	ø 1/8-1/2 in.	A + 2321 4	12	48
416033	6.35 mm (1/4 in.)	12	ø 3/16-7/8 in.	A + 2324 5	12	48
416035	9.5 mm (3/8 in.)	10	ø 1/4-1-3/8 in.	A + 2325 2	12	48

ø 4-12 mm



416001

ø 4-20 mm




416005

ø 6-20 mm



416015

ø 6-25 mm

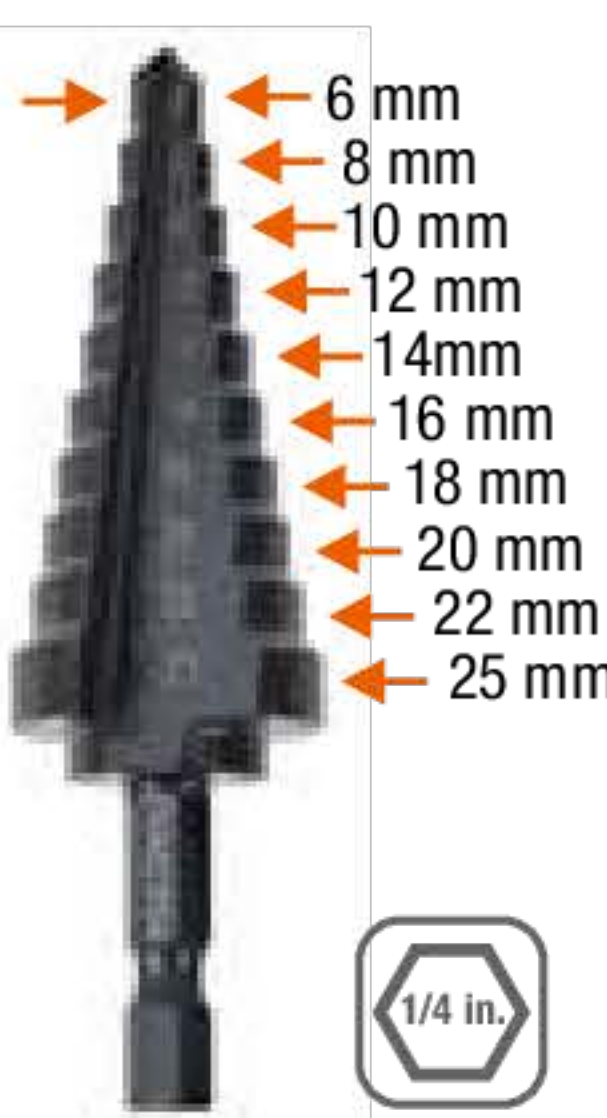


416017

ø 5-35 mm




416019

ø 1/8-1/2 in.

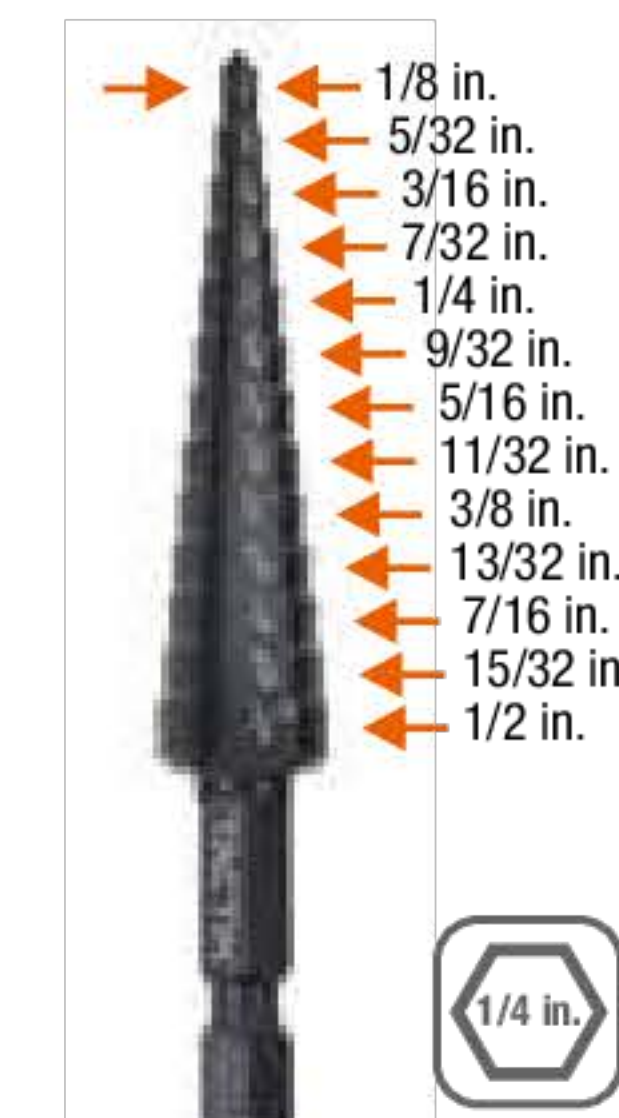


416027

ø 3/16-7/8 in.

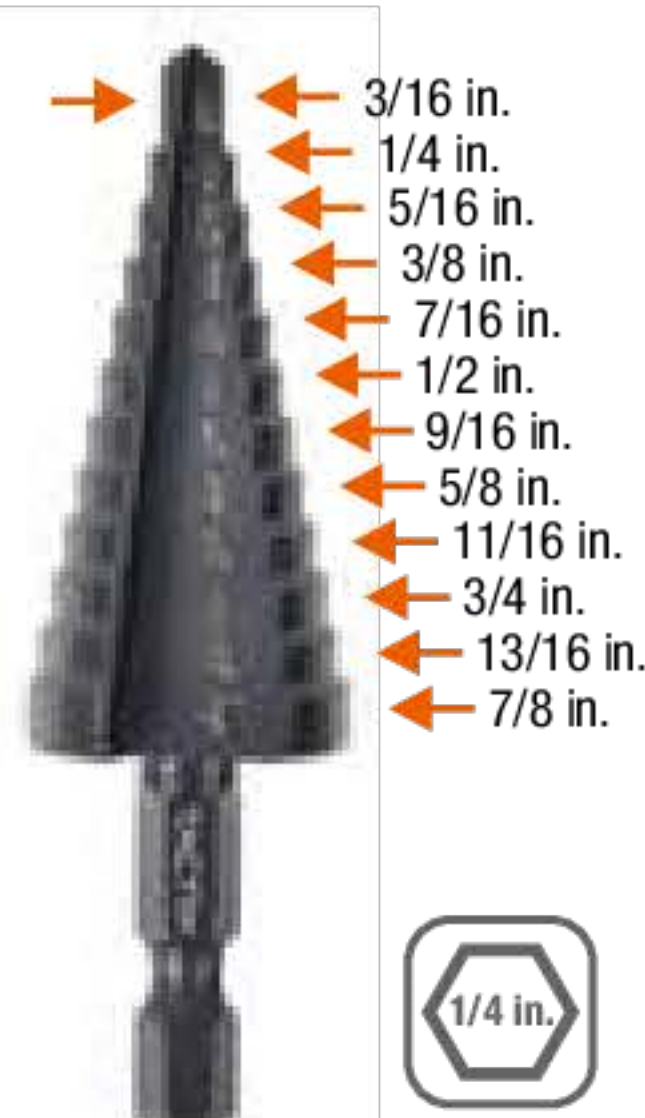

416033

ø 1/4-1-3/8 in.

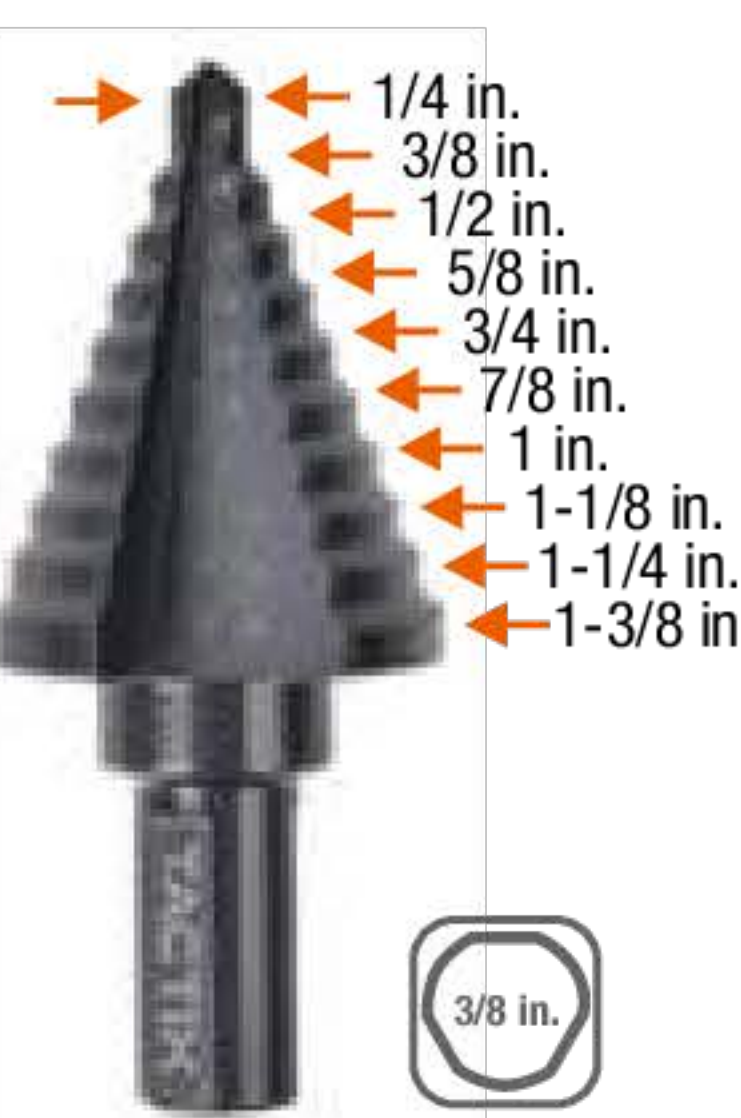

416035

3 PC HSS STEP DRILL-METRIC

416061

- High speed steel
- Titanium coating for rust prevention
- Automatically debur holes
- For drilling multiple hole sizes with one bit in steel, brass, copper, aluminum, wood and plastic



Item No.	Shank DIA.	Size	EAN 69743345+	Inner	Outer
416061	6.35 mm (1/4 in.)	ø 4-12 / ø 4-20 / ø 4-32 mm	5336 2	6	24




3 PC HSS STEP DRILL-SAE

416063


- High speed steel
- Titanium coating for rust prevention
- Automatically debur holes
- For drilling multiple hole sizes with one bit in steel, brass, copper, aluminum, wood and plastic



Item No.	Shank DIA.	Size	EAN 69743345+	Inner	Outer
416063	6.35 mm (1/4 in.)	ø 3/16-1/2 / ø 1/4-3/4 / ø 1/8-1/2 in.	5337 9	6	24

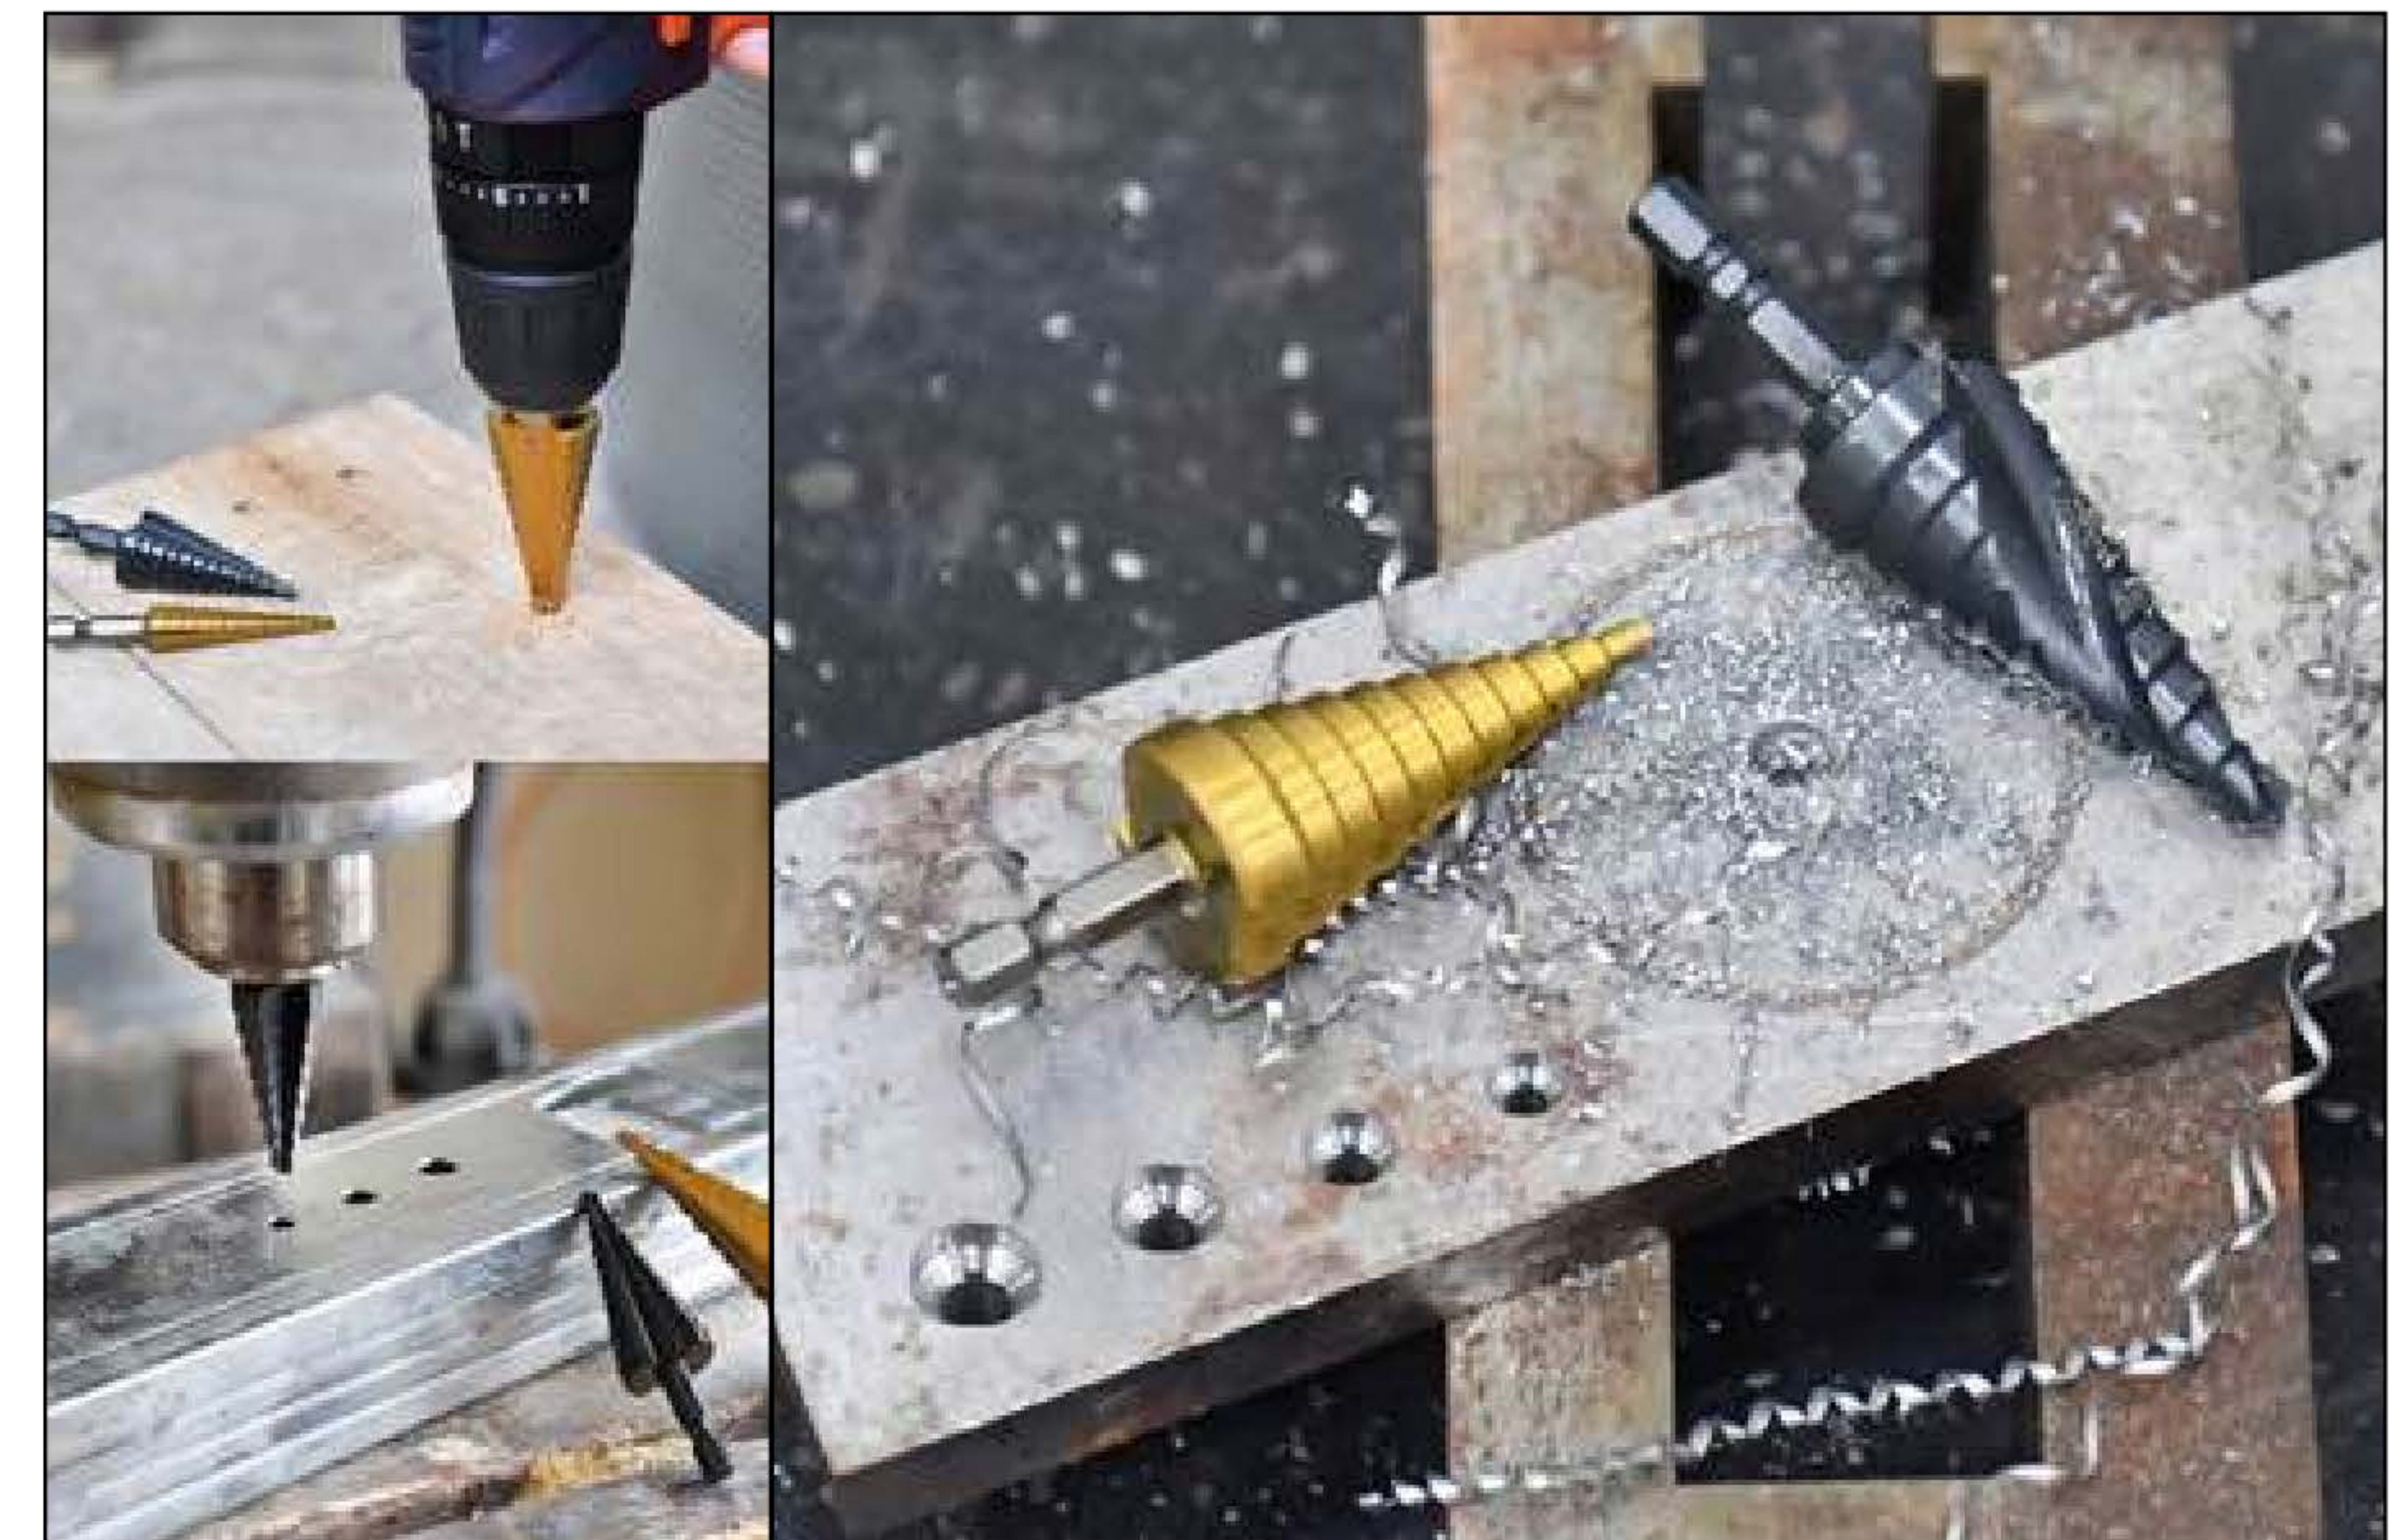

CONCRETE DRILL BITS

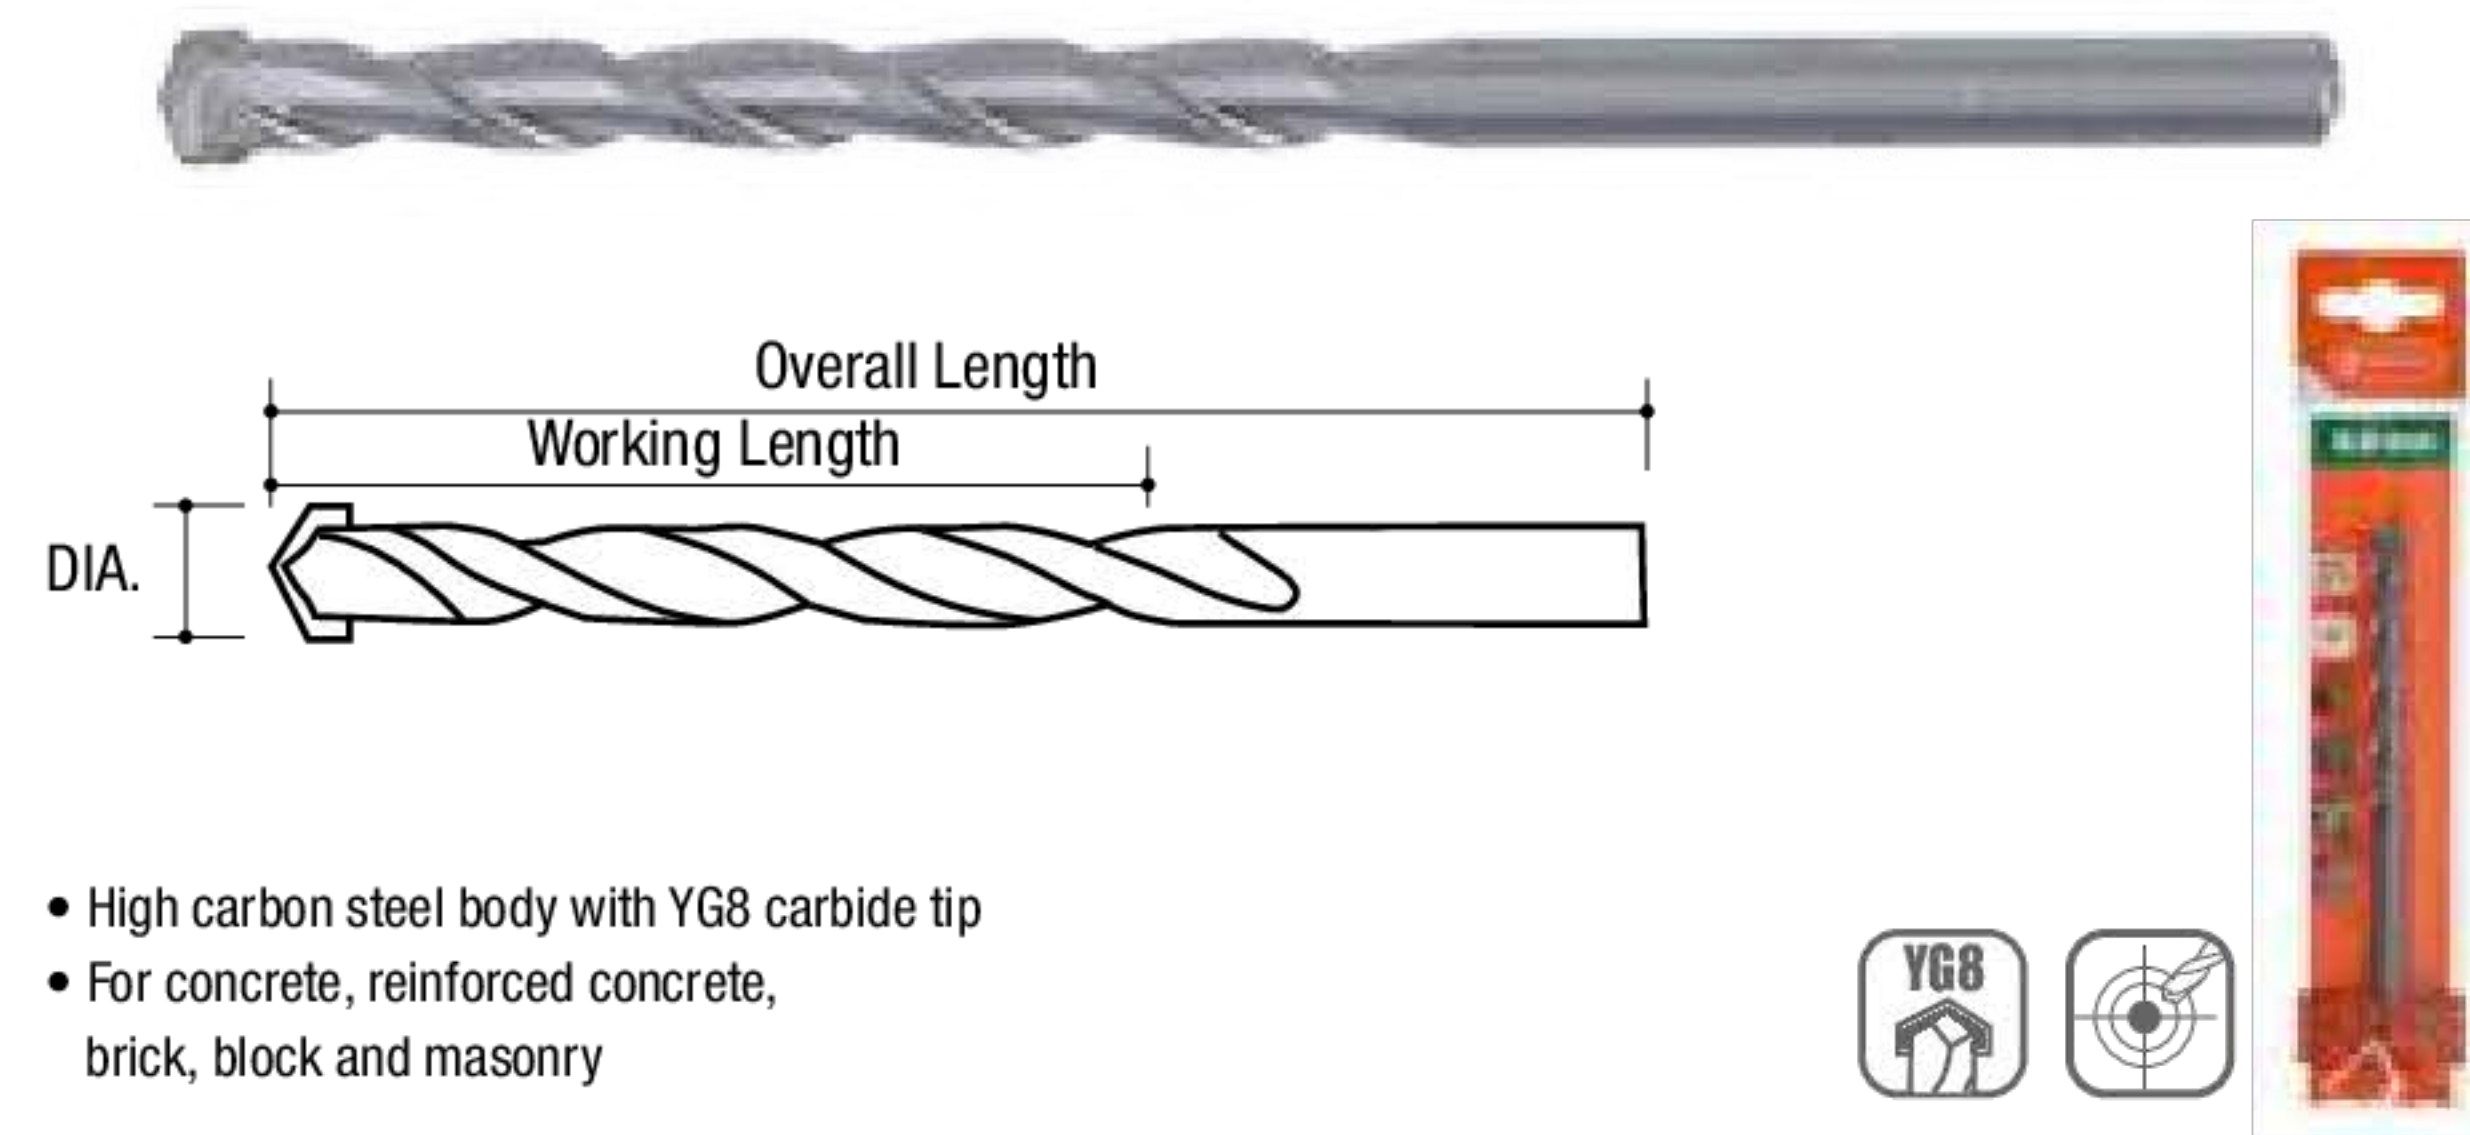

- High carbon steel body with YG8 carbide tip
- For concrete, reinforced concrete, brick, block and masonry

Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410501	2 PC 3.0 mm	36 mm	60 mm	2008 4	20	200
410503	4.0 mm	45 mm	75 mm	2009 1	20	200
410505	5.0 mm	51 mm	85 mm	2010 7	20	200
410506	5.5 mm	55 mm	100 mm	5458 4	20	120
410507	6.0 mm	60 mm	100 mm	2011 4	20	120
410508	6.5 mm	60 mm	100 mm	5459 1	20	120
410509	7.0 mm	60 mm	100 mm	2012 1	20	120
410511	8.0 mm	72 mm	120 mm	2013 8	20	120
410513	9.0 mm	72 mm	120 mm	2014 5	20	120
410515	10.0 mm	72 mm	120 mm	2015 2	20	120
410517	11.0 mm	90 mm	150 mm	2016 9	20	120
410519	12.0 mm	90 mm	150 mm	2017 6	20	120
410521	13.0 mm	90 mm	150 mm	2018 3	20	120
410523	14.0 mm	90 mm	150 mm	2019 0	20	120
410525	15.0 mm	90 mm	150 mm	2020 6	20	120
410527	16.0 mm	90 mm	150 mm	2021 3	20	120

10 PC CONCRETE DRILL SET

- High carbon steel body with YG8 carbide tip
- For concrete, reinforced concrete, brick, block and masonry



Item No.	DIA.	Working Length	Overall Length	EAN 69743345+	Inner	Outer
410551BS	10PC 1/8in.	1-3/4 in.	3 in.	5013 2	36	72
410552BS	10PC 5/32in.	1-3/4 in.	3 in.	5014 9	36	72
410553BS	10PC 3/16in.	2-3/8 in.	4 in.	5015 6	36	72
410555BS	10PC 1/4in.	2-3/8 in.	4 in.	5016 3	30	60
410558BS	10PC 5/16in.	3-1/2 in.	6 in.	5017 0	24	48
410559BS	10PC 3/8in.	3-1/2 in.	6 in.	5018 7	18	36
410561BS	5PC 1/2in.	3-1/2 in.	6 in.	5019 4	18	36

5 PC MASONRY DRILL BITS

- 40CR body with YG8C carbide tip
- 3-flat shank for sure grip
- For concrete, reinforced concrete, brick, block and masonry
- Plastic box included



Item No.	Description	EAN 69426292+	Inner	Outer
410694	4, 5, 6, 8, 10 mm	8489 5	10	60
410695	5 PC - 5/32, 3/16, 1/4, 5/16, 3/8 in.	6206 0	10	60

5 PC CONCRETE DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410547	5 PC - 4, 5, 6, 8, 10 mm	2031 2	10	60

8 PC CONCRETE DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410548	8 PC - 3, 4, 5, 6, 7, 8, 9, 10 mm	3820 1	10	60
410550	8 PC - 1/8, 5/32, 3/16, 1/4, 9/32, 5/16, 11/32, 3/8 in.	6970 0	10	60

MULTI-PURPOSE DRILL BITS

- High carbon steel body with YG8 carbide tip
- For masonry, tile, wood, chipboard, metal plate and plastic



Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410601	2 PC 3.0 mm	36 mm	60 mm	2032 9	20	200
410603	4.0 mm	45 mm	75 mm	2033 6	20	200
410605	5.0 mm	51 mm	85 mm	2034 3	20	200
410607	6.0 mm	60 mm	100 mm	2035 0	20	120
410609	7.0 mm	60 mm	100 mm	2036 7	20	120
410611	8.0 mm	72 mm	120 mm	2037 4	20	120
410613	9.0 mm	72 mm	120 mm	2038 1	20	120
410615	10.0 mm	72 mm	120 mm	2039 8	20	120
410617	11.0 mm	90 mm	150 mm	2040 4	20	120
410619	12.0 mm	90 mm	150 mm	2041 1	20	120
410621	13.0 mm	90 mm	150 mm	2042 8	20	120

Item No.	DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
410623	14.0 mm	90 mm	150 mm	2043 5	20	120
410625	15.0 mm	90 mm	150 mm	2044 2	20	120
410627	16.0 mm	90 mm	150 mm	2045 9	20	120
410663	3/16 in.	2-3/8 in.	4 in.	5950 3	20	200
410665	1/4 in.	2-3/8 in.	4 in.	5952 7	20	120
410673	1/4 in.	3-1/2 in.	6 in.	5953 4	20	120
410674	5/16 in.	3-1/2 in.	6 in.	5954 1	20	120
410675	3/8 in.	3-1/2 in.	6 in.	5955 8	20	120
410677	1/2 in.	3-1/2 in.	6 in.	5957 2	20	120
410679	5/8 in.	3-1/2 in.	6 in.	5959 6	20	120
410680	3/4 in.	3-1/2 in.	6 in.	5960 2	20	120

5 PC MULTI-PURPOSE DRILL BITS



Item No.	Description	EAN 69426292+	Inner	Outer
410655	5 PC Multi-purpose Drill Bits	3821 8	10	60

8 PC MULTI-PURPOSE DRILL BITS



Item No.	Description	EAN 69762270+	Inner	Outer
410657	8 PC Multi-Purpose Drill Bits	3322 7	10	60

GLASS/TILE DRILL BITS

- YG6X carbide tip
- For tile, china, mirrors and glass



Item No.	DIA.	EAN 69426292+	Inner	Outer
416201	4.0 mm	2337 5	10	100
416203	5.0 mm	2338 2	10	100
416205	6.0 mm	2339 9	10	100
416207	7.0 mm	2340 5	10	100
416209	8.0 mm	2341 2	10	100
416223	3/16 in.	6768 3	10	100
416225	1/4 in.	6769 0	10	100
416227	5/16 in.	6770 6	10	100
416229	3/8 in.	6771 3	10	100
416231	1/2 in.	6772 0	10	100

5 PC GLASS/TILE DRILL BITS

- YG6X carbide tip
- For tile, china, mirrors and glass



Item No.	Description	EAN 69762270+	Inner	Outer
416241	5 PC Glass/Tile Drill Bits	3321 0	10	60

CROSS CARBIDE GLASS/TILE DRILL BIT


- TCT Carbide crossed TIP
- Hex quick change shank
- Sand blast finish



Item No.	DIA.	EAN 69777135+	Inner	Outer
416250	4.0 mm	1570 8	12	72
416252	5.0 mm	1571 5	12	72
416254	6.0 mm	1572 2	12	72
416256	8.0 mm	1573 9	12	48
416258	10.0 mm	1574 6	12	48
416260	12.0 mm	1575 3	12	48

SDS PLUS POINT CHISEL

- For concrete, masonry and natural stone

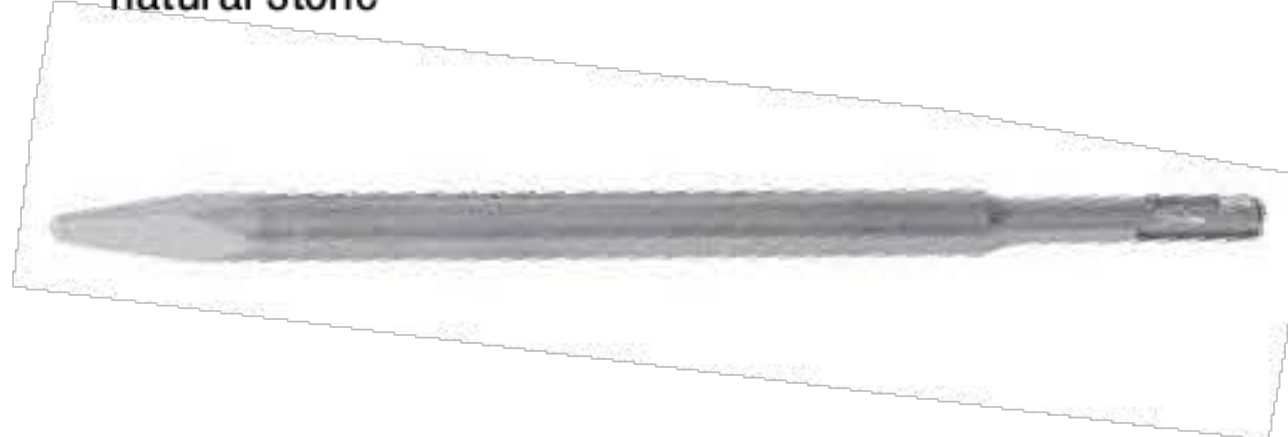

Item No.	Overall length	Size	EAN 69426292+	Inner	Outer
410901	250 mm (10 in.)	Point	3822 5	10	60

SDS PLUS FLAT CHISEL


- For concrete, masonry and natural stone



Item No.	Overall length	Size	EAN 69426292+	Inner	Outer
410902	250 mm (10 in.)	20 mm (13/16 in.)	3823 2	10	60
410903	250 mm (10 in.)	40 mm (1-9/16 in.)	3824 9	10	60

SDS PLUS GAUGE CHISEL

- For concrete, masonry and natural stone

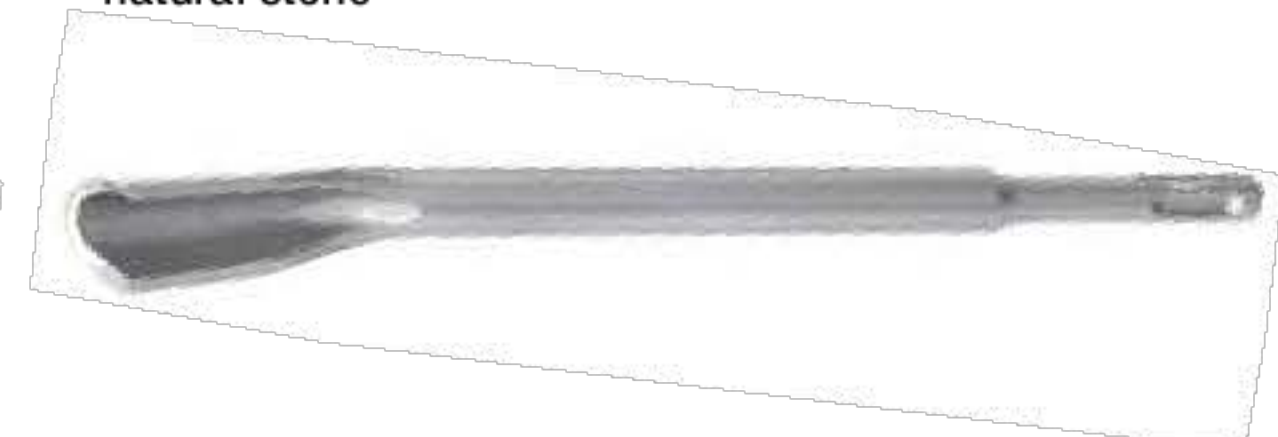

Item No.	Overall length	Size	EAN 69426292+	Inner	Outer
410904	250 mm (10 in.)	Gauge	3825 6	10	60

5 PC SDS PLUS HAMMER DRILL BITS

- 40CR body with professional quality YG8C carbide tip
- For hard materials, concrete, granite and brick



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410954	5 PC SDS Plus Hammer Drill Bits	4, 5, 6, 8, 10 mm	8490 1	10	60
410955	5 PC SDS Plus Hammer Drill Bits	3/16, 1/4, 5/16, 3/8, 1/2 in.	6482 8	10	60

4 PC SDS PLUS HAMMER DRILL BITS

- 40CR body with professional quality YG8C carbide tip
- For hard materials, concrete, granite and brick



Item No.	Description	Contents	EAN 69426292+	Inner	Outer
410951	4 PC SDS Plus Hammer Drill Bits	5, 6, 8, 10 mm	4997 9	10	60
410953	4 PC SDS Plus Hammer Drill Bits	5, 6, 8, 10 mm	4998 6	10	60

SDS MAX HAMMER DRILL BITS

- 40CR body with professional quality YG8C carbide tip
- For hard materials, concrete, granite and brick



Item No.	DIA.	Shank DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
411012	12.0 mm	18 mm	210 mm	340 mm	4493 6	10	40
411014	14.0 mm	18 mm	210 mm	340 mm	4494 3	10	40
411016	16.0 mm	18 mm	210 mm	340 mm	4495 0	10	40
411018	18.0 mm	18 mm	210 mm	340 mm	4496 7	10	40
411020	20.0 mm	18 mm	210 mm	340 mm	4497 4	10	20
411022	22.0 mm	18 mm	210 mm	340 mm	4498 1	10	20
411025	25.0 mm	18 mm	210 mm	340 mm	4499 8	10	20
411028	28.0 mm	18 mm	210 mm	340 mm	4500 1	10	20
411030	30.0 mm	18 mm	210 mm	340 mm	4501 8	5	10
411054	14.0 mm	18 mm	340 mm	505 mm	4502 5	10	20
411056	16.0 mm	18 mm	340 mm	505 mm	4503 2	10	20
411058	18.0 mm	18 mm	340 mm	505 mm	4504 9	10	20
411060	20.0 mm	18 mm	340 mm	505 mm	4505 6	0	10

Item No.	DIA.	Shank DIA.	Working Length	Overall Length	EAN 69426292+	Inner	Outer
411062	22.0 mm	18 mm	340 mm	505 mm	4506 3	0	10
411065	25.0 mm	18 mm	340 mm	505 mm	4507 0	0	10
411068	28.0 mm	18 mm	340 mm	505 mm	4508 7	5	10
411070	30.0 mm	18 mm	340 mm	505 mm	4509 4	5	10
411072	32.0 mm	18 mm	340 mm	505 mm	4510 0	5	10
411075	35.0 mm	18 mm	340 mm	505 mm	4511 7	0	5
411080	20.0 mm	18 mm	670 mm	800 mm	4512 4	0	5
411082	22.0 mm	18 mm	670 mm	800 mm	4513 1	0	5
411085	25.0 mm	18 mm	670 mm	800 mm	4514 8	0	5
411088	28.0 mm	18 mm	670 mm	800 mm	4515 5	0	5
411090	30.0 mm	18 mm	670 mm	800 mm	4516 2	0	5
411095	35.0 mm	18 mm	670 mm	800 mm	4517 9	0	5

11 PC SDS PLUS HAMMER DRILL BITS

- 40CR body with professional quality YG8C carbide tip
- For hard materials, concrete, granite and brick

- Contents:
- 5 x 110 mm
 - 6 x 160 mm
 - 10 x 160 mm
 - 12 x 210 mm
 - 12 x 450 mm
 - 20 x 450 mm
 - 6 x 110 mm
 - 8 x 160 mm
 - 10 x 210 mm
 - 10 x 450 mm
 - 16 x 450 mm



Item No.	Description	EAN 69426292+	Inner	Outer
410961	11 PC SDS Plus Hammer Drill Bits	4999 3	0	6

11 PC SDS-PLUS DRILLS & CHISELS SET

- 1 pc chisel 14 x 250 mm
- 2 pc chisels flat 20 & 40 x 250 mm,
- 8 pc drills sds: 5 x 110 mm, 6 x 110 mm, 8 x 160 mm, 10 x 160 mm, 12 x 160 mm, 14 x 200 mm, 16 x 200 mm, 18 x 300 mm



Item No.	Description	EAN 69426292+	Inner	Outer
410962	11 PC SDS-Plus Drills & Chisels Set	8674 5	0	5



8 PC SDS PLUS HAMMER DRILL BIT SET



- Contents:
- 5 x 110 mm, 5.5 x 110 mm, 6 x 110 mm, 6.5 x 110 mm, 5 x 160 mm, 6 x 160 mm, 8 x 160 mm, 10 x 160 mm
 - 40CR body with professional quality YG8C carbide tip
 - For hard materials, concrete, granite and brick




Item No.	Description	EAN 69762270+	Inner	Outer
410950	8 PC SDS Plus Hammer Drill Bits Set	3318 0	6	24



50 mm (2 in.) GARDEN AUGER DRILL BIT


- Ideal for planting vegetables, seedlings, small bulbs and aerating lawns
- Easily digs through most soil types
- Constructed from heavy duty steel
- 11.1 mm (7/16 in.) Hex-shank fits most power drill chucks

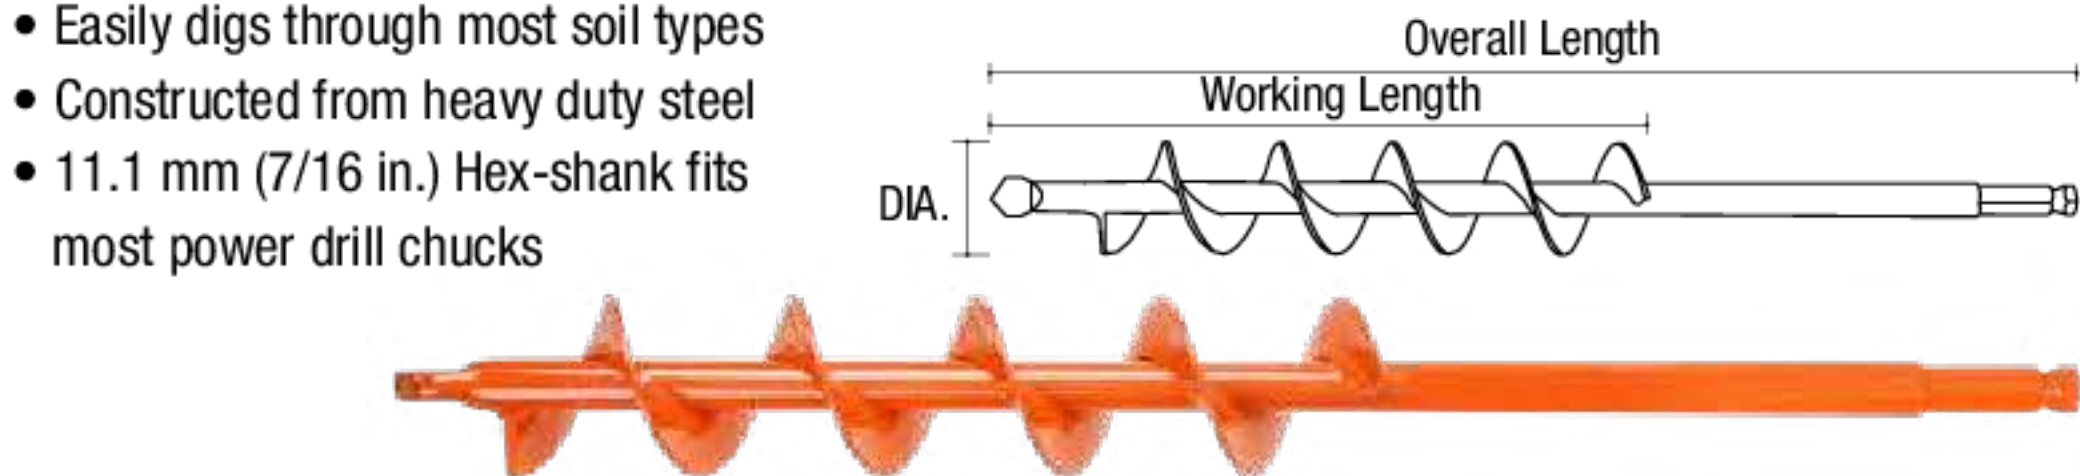

Item No.	DIA.	Working Length	Overall Length	EAN	Inner	Outer
412150	50 mm (2 in.)	300 mm (11-3/4 in.)	450 mm (17-3/4 in.)	69708346+	1	8

75 mm (3 in.) GARDEN AUGER DRILL BIT


- Ideal for planting larger bulbs, plants and tilling
- Easily digs through most soil types
- Constructed from heavy duty steel
- 11.1 mm (7/16 in.) Hex-shank fits most power drill chucks

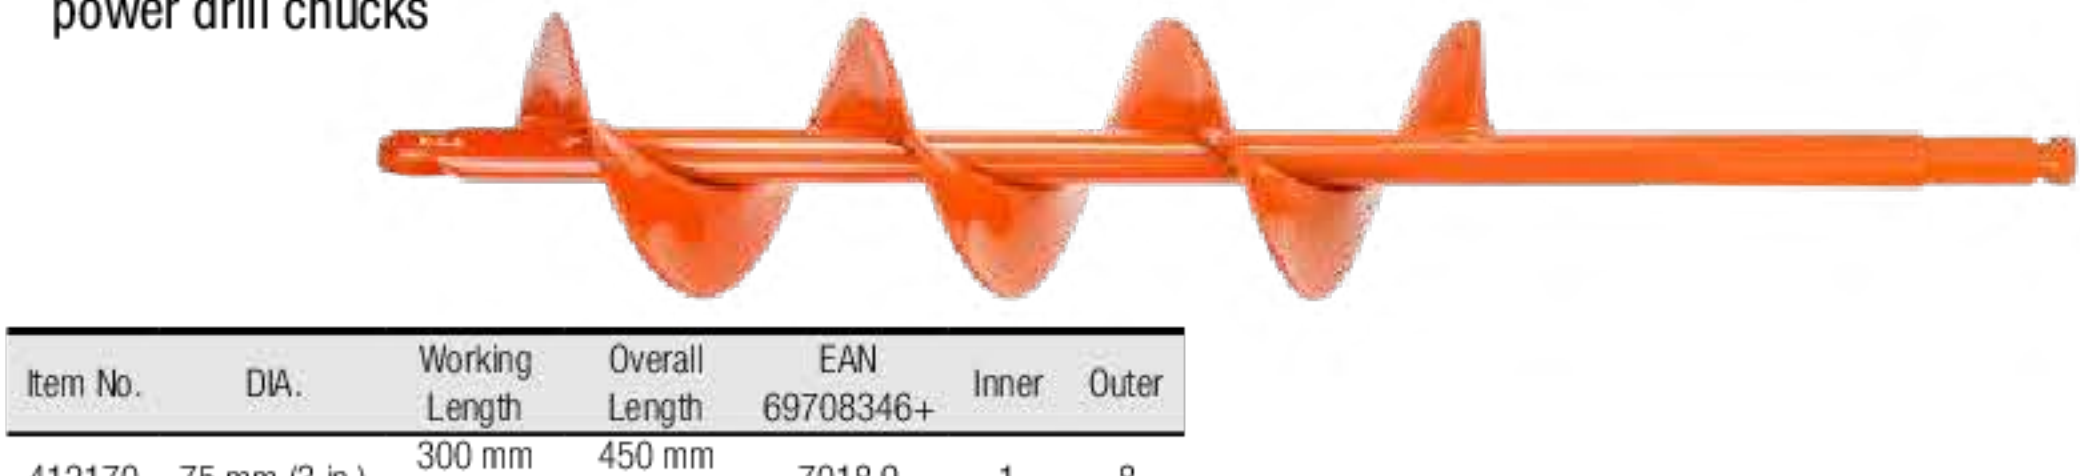

Item No.	DIA.	Working Length	Overall Length	EAN	Inner	Outer
412170	75 mm (3 in.)	300 mm (11-3/4 in.)	450 mm (17-3/4 in.)	7018 9	1	8

100 mm (4 in.) GARDEN AUGER DRILL BIT


- Ideal for preparing post holes and planting
- Easily digs through most soil types
- Constructed from heavy duty steel
- 11.1 mm (7/16 in.) Hex-shank fits most power drill chucks

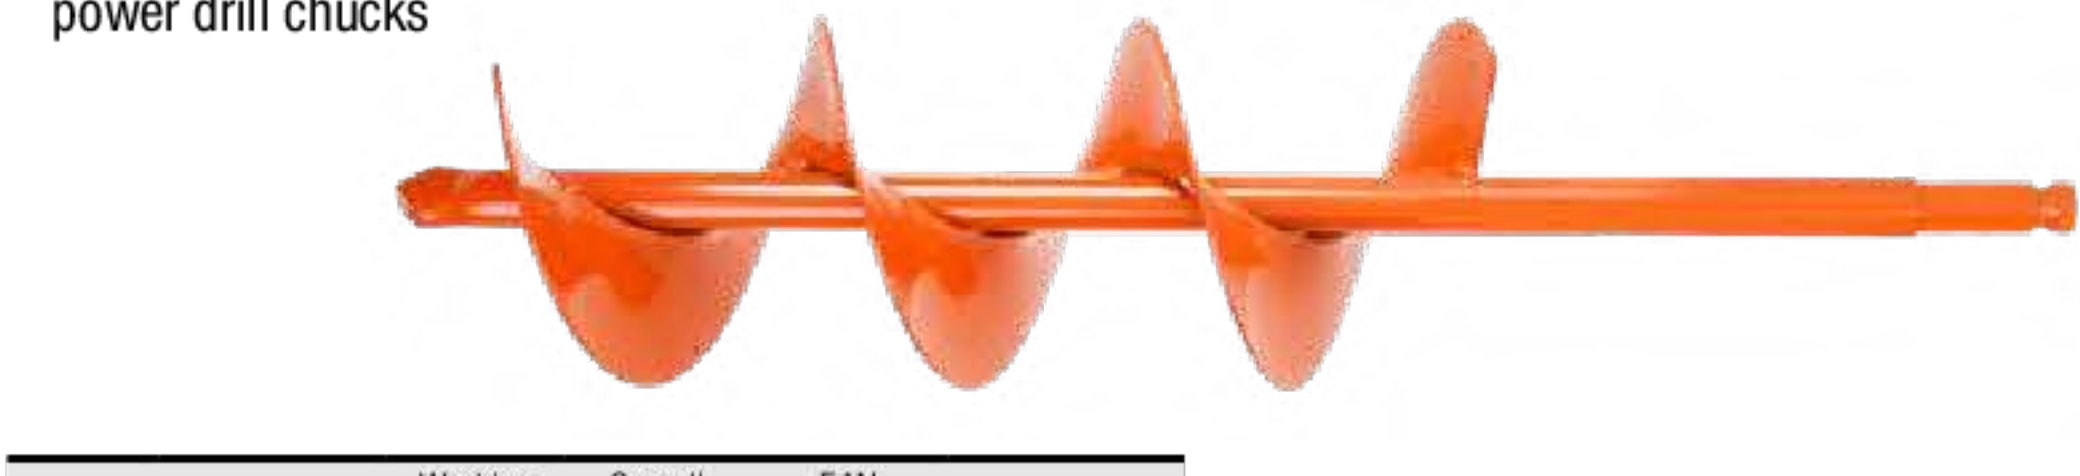

Item No.	DIA.	Working Length	Overall Length	EAN	Inner	Outer
412190	100 mm (4 in.)	300 mm (11-3/4 in.)	450 mm (17-3/4 in.)	7566 5	1	8

40 mm (1-9/16 in.) GARDEN AUGER DRILL BIT


- Ideal for planting vegetables, seedlings, small bulbs and aerating lawns
- Easily digs through most soil types
- Constructed from heavy duty steel
- 7mm Hex-shank fits most power drill chucks

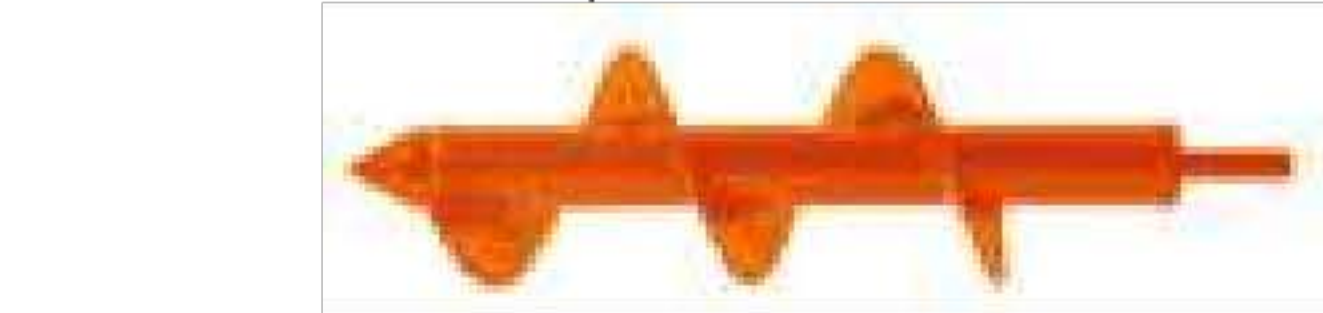

Item No.	DIA.	Working Length	Overall Length	EAN	Inner	Outer
412145	40 mm (1-9/16 in.)	100 mm (4 in.)	220 mm (8-5/8 in.)	5475 8	1	8

50 mm (2 in.) GARDEN AUGER DRILL BIT

- Ideal for planting vegetables, seedlings, small bulbs and aerating lawns
- Easily digs through most soil types
- Constructed from heavy duty steel
- 7mm Hex-shank fits most power drill chucks

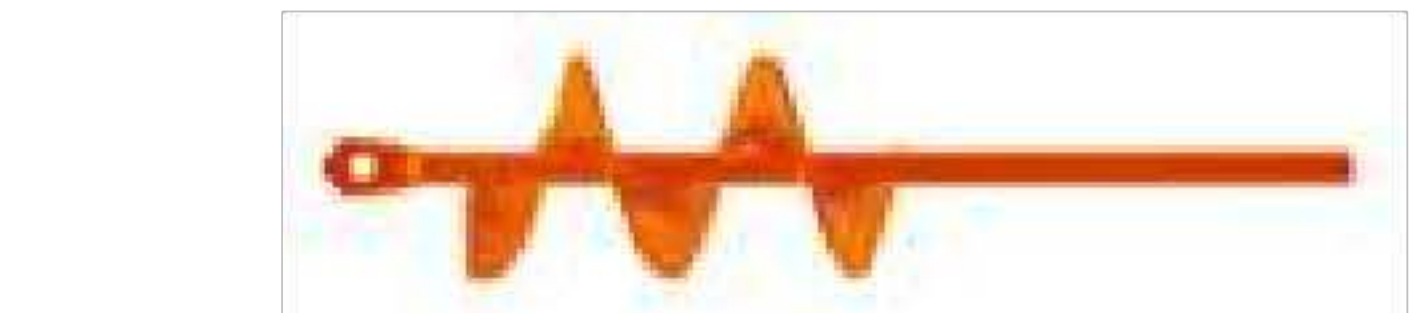

Item No.	DIA.	Working Length	Overall Length	EAN	Inner	Outer
412147	50 mm(2 in.)	100 mm (4 in.)	220 mm (8-5/8 in.)	5476 5	1	8

80 mm (3-3/16 in.) GARDEN AUGER DRILL BIT

- Ideal for planting larger bulbs, plants and tilling
- Easily digs through most soil types
- Constructed from heavy duty steel
- 8mm Hex-shank fits most power drill chucks



Item No.	DIA.	Working Length	Overall Length	EAN	Inner	Outer
412149	80 mm (3-3/16 in.)	170 mm (6-5/8 in.)	300 mm (11-3/4 in.)	5477 2	1	8

HSS BRAD POINT WOOD DRILL BITS



- Precision ground #4241 high speed steel
- Brad point tip provides accurate positioning for starting
- For soft wood, hard wood, plywood, hardboards and veneer wood



Item No.	DIA.	Working Length	Overall Length	EAN	Inner	Outer
411501	3.0 mm	32 mm	60 mm	2153 1	20	200
411503	4.0 mm	42 mm	74 mm	2154 8	20	200
411505	5.0 mm	51 mm	85 mm	2155 5	20	200
411509	6.0 mm	56 mm	92 mm	2157 9	20	120
411513	7.0 mm	68 mm	108 mm	2159 3	20	120
411515	8.0 mm	74 mm	116 mm	2160 9	20	120
411517	9.0 mm	80 mm	124 mm	2161 6	20	120
411519	10.0 mm	86 mm	132 mm	2162 3	20	120
411521	11.0 mm	93 mm	141 mm	2163 0	20	120
411523	12.0 mm	100 mm	150 mm	2164 7	20	120
411525	13.0 mm	100 mm	150 mm	2165 4	20	120

WOOD SPADE



- 3-Point cutting edges
- Hex shank for quick change adapters and a more secure fit
- For hard, soft and engineered wood

Item No.	DIA.	Overall Length	EAN	Inner	Outer
411601	6.0 mm	152 mm	2168 5	10	60
411603	8.0 mm	152 mm	2169 2	10	60
411605	10.0 mm	152 mm	2170 8	10	60
411609	12.0 mm	152 mm	2172 2	10	60
411611	13.0 mm	152 mm	2173 9	10	60
411613	14.0 mm	152 mm	2174 6	10	60
411617	16.0 mm	152 mm	2176 0	10	60
411621	18.0 mm	152 mm	2178 4	10	60
411623	19.0 mm	152 mm	2179 1	10	60
411625	20.0 mm	152 mm	2180 7	10	60
411627	22.0 mm	152 mm	2181 4	10	60
411629	24.0 mm	152 mm	2182 1	10	60
411631	25.0 mm	152 mm	2183 8	10	60
411633	26.0 mm	152 mm	2184 5	10	60
411635	28.0 mm	152 mm	2185 2	10	60
411637	30.0 mm	152 mm	2186 9	10	60
411639	32.0 mm	152 mm	2187 6	10	60
411641	35.0 mm	152 mm	2188 3	10	60
411643	38.0 mm	152 mm	2189 0	10	60

Item No.	DIA.	Overall Length	EAN	Inner	Outer
411661	1/4 in.	6 in.	2192 0	10	60
411662	5/16 in.	6 in.	2193 7	10	60
411663	3/8 in.	6 in.	2194 4	10	60
411664	7/16 in.	6 in.	2195 1	10	60
411665	1/2 in.	6 in.	2196 8	10	60
411666	9/16 in.	6 in.	2197 5	10	60
411667	5/8 in.	6 in.	2198 2	10	60
411668	11/16 in.	6 in.	2199 9	10	60
411669	3/4 in.	6 in.	2200 2	10	60
411670	13/16 in.	6 in.	2201 9	10	60
411671	7/8 in.	6 in.	2202 6	10	60
411672	15/16 in.	6 in.	2203 3	10	60
411673	1 in.	6 in.	2204 0	10	60
411674	1-1/8 in.	6 in.	2205 7	10	60
411675	1-1/4 in.	6 in.	2206 4	10	60
411676	1-3/8 in.	6 in.	2207 1	10	60

5 PC HSS BRAD WOOD DRILL BITS



Item No.	Description	EAN	Inner	Outer
411527	5 PC HSS Brad Point Wood Drill Bits	2166 1	10	60

8 PC HSS BRAD WOOD DRILL BITS




Item No.	Description	EAN	Inner	Outer
411529	8 PC HSS Brad Point Wood Drill Bits	2167 8	10	60

6 PC WOOD SPADE




Item No.	Description	EAN	Inner	Outer
411647	6 PC Wood Spade Set	2191 3	5	30

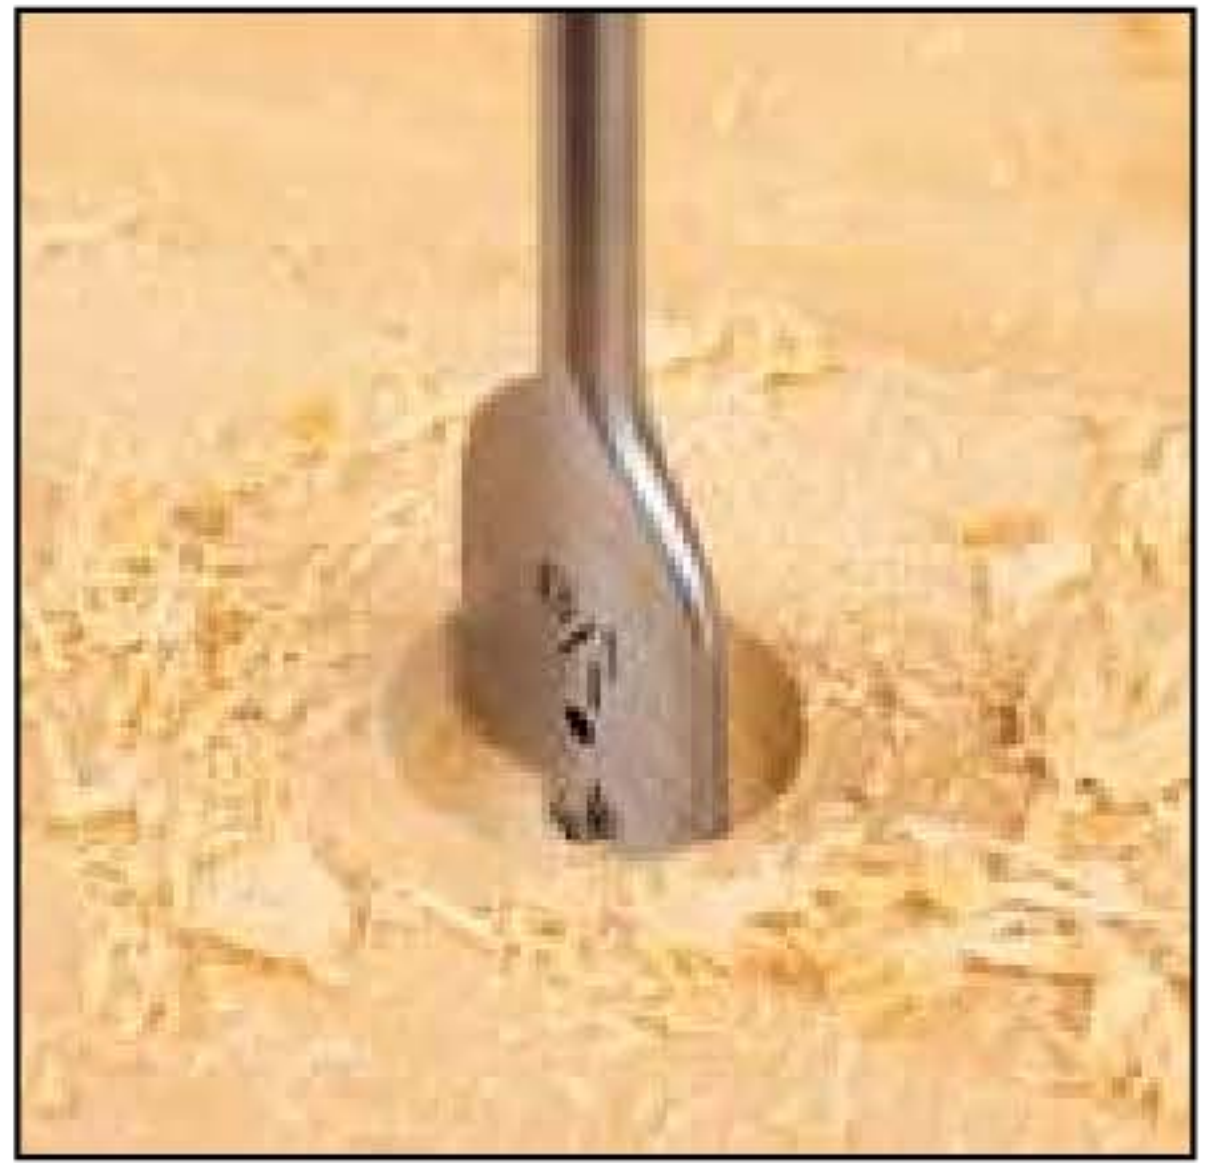

SHIP AUGER BITS

- The ship head and coarse screw point provide fast boring in hard and soft wood as well as cuts through knots
- Solid center with single cutter
- Screw point for precise locating
- For chipboard, plywood and large timber

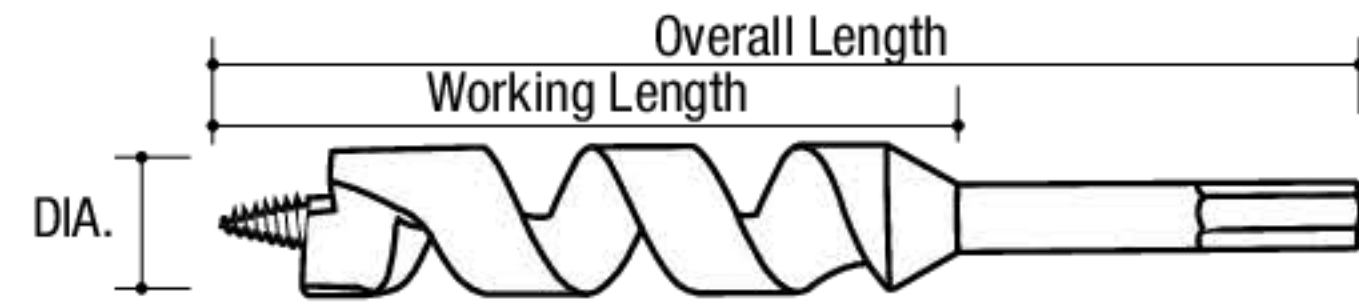

460 mm
Extra Long

Item No.	DIA.	Total Length	Working Length	EAN 69426292+	Inner	Outer
412003	8.0 mm	230 mm	168 mm	2219 4	10	60
412005	10.0 mm	230 mm	168 mm	2220 0	10	60
412007	12.0 mm	230 mm	168 mm	2221 7	10	60
412009	14.0 mm	230 mm	168 mm	2222 4	10	60
412011	16.0 mm	230 mm	168 mm	2223 1	10	60
412013	18.0 mm	230 mm	168 mm	2224 8	10	60
412015	20.0 mm	230 mm	168 mm	2225 5	10	60
412017	22.0 mm	230 mm	168 mm	2226 2	6	36
412035	10.0 mm	460 mm	388 mm	2235 4	10	60
412037	12.0 mm	460 mm	388 mm	2236 1	10	60

Item No.	DIA.	Total Length	Working Length	EAN 69426292+	Inner	Outer
412039	14.0 mm	460 mm	388 mm	2237 8	10	60
412041	16.0 mm	460 mm	388 mm	2238 5	10	40
412043	18.0 mm	460 mm	388 mm	2239 2	10	40
412045	20.0 mm	460 mm	388 mm	2240 8	10	30
412047	22.0 mm	460 mm	388 mm	2241 5	4	16
412049	24.0 mm	460 mm	388 mm	2242 2	4	16
412051	25.0 mm	460 mm	388 mm	2243 9	4	16
412053	28.0 mm	460 mm	388 mm	2244 6	4	16
412055	30.0 mm	460 mm	388 mm	2245 3	4	16

8 PC 230 mm AUGER DRILL BITS SET




- Contents: 6, 8, 10, 12, 14, 16, 18, 20 mm

Item No.	Description	EAN 69426292+	Inner	Outer
412081	8 PC 230 mm Auger Drill Bits Set	5000 5	0	10

SUPER FORSTNER BITS

- For drilling dimensionally accurate, tear-free, flat bottomed holes in solid wood, veneered wood boards, chipboard and plywood
- Ideal for door locks, mortising, electrical and plumbing work
- Not for use with routers

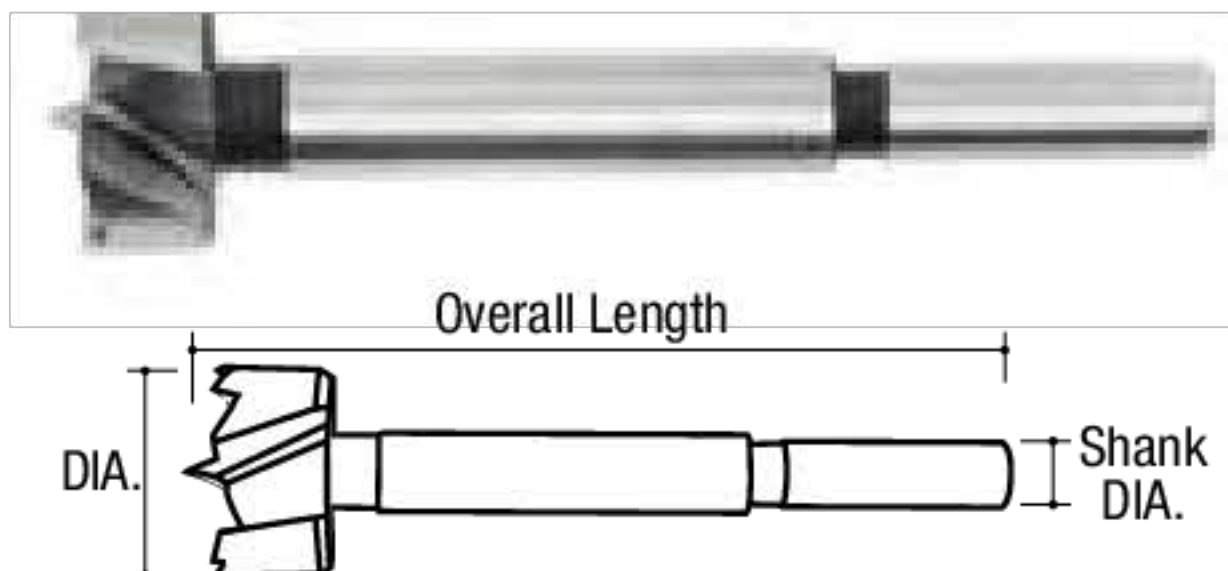

Item No.	DIA.	Shank DIA.	EAN 69426292+	Inner	Outer
412109	15.0 mm	8.0 mm	2255 2	12	48
412115	20.0 mm	8.0 mm	2258 3	12	48
412121	25.0 mm	8.0 mm	2261 3	12	48
412127	30.0 mm	8.0 mm	2264 4	12	48
412132	35.0 mm	10.0 mm	3841 6	12	48



5 PC SUPER FORSTNER BITS SET



- Contents: 15, 20, 25, 30, 35 mm

Item No.	Description	EAN 69426292+	Inner	Outer
412171	5 PC Super Forstner Bits Set	2286 6	0	20

15 PC SUPER FORSTNER BITS SET




- Contents: 10, 12, 15, 16, 18, 20, 22, 25, 26, 28, 30, 35, 40, 45, 50 mm

Item No.	Description	EAN 69426292+	Inner	Outer
412173	15 PC Super Forstner Bits Set	2287 3	0	6

TCT FORSTNER BITS

- YG8 carbide tipped Brad point
- For drilling dimensionally accurate, tear-free holes in soft and hard wood, resin bonded and plastic coated laminates, veneered wood sheet, chipboard, and other forms of compressed wood sheet
- Ideal for carpenters, joiners, kitchen work and window installation

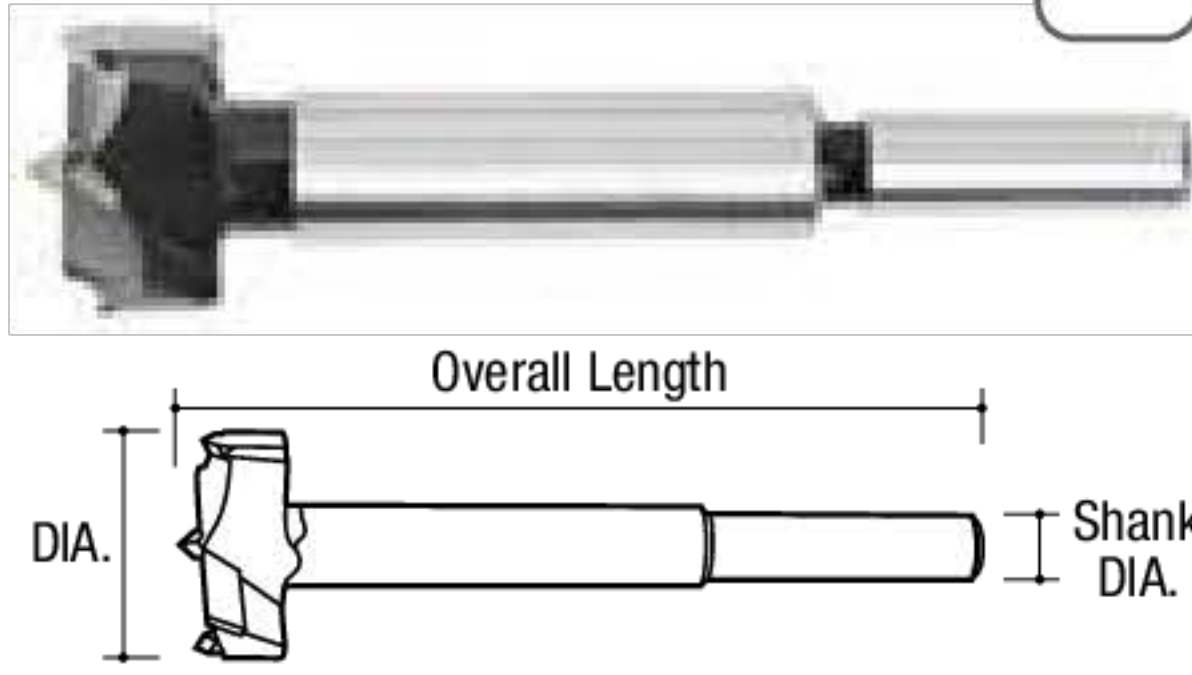

Item No.	DIA.	Shank DIA.	Overall DIA.	EAN 69426292+	Inner	Outer
412201	15.0 mm	8.0 mm	90 mm	2288 0	12	48
412207	20.0 mm	8.0 mm	90 mm	2291 0	12	48
412213	25.0 mm	8.0 mm	90 mm	2294 1	12	48
412219	30.0 mm	8.0 mm	90 mm	2297 2	12	48
412225	35.0 mm	10.0 mm	90 mm	2300 9	12	48



5 PC TCT FORSTNER BITS SET



- Contents: 15, 20, 25, 30, 35 mm

Item No.	Description	EAN 69426292+	Inner	Outer
412239	5 PC TCT Forstner Bits Set	2306 1	5	20

4 PC WOOD PRE-DRILL SET



- Hss Step Drill Bit
- Pocket Hole Guide
- Hex key
- Depth Ring
- Introduction

Item No.	Description	EAN 69426292+	Inner	Outer
413001	4 PC Wood Pre-Drill Set	2311 5	6	24

QUAD FLUTE DRILL BIT


- Quad cutting spurs for faster, cleaner holes, less breakout, and extended drilling file
- Full screw-point tip allows bit to self-feed for ease of drilling.
- Tapered quad-flute design for faster chip ejection and less binding; quick-change shank
- 4x faster than regular wood drill



Item No.	DIA.	Overall Length	EAN 69426292+	Inner	Outer
412510	10 mm	165 mm	2209 5	10	60
412512	12 mm	165 mm	2210 1	10	60
412516	16 mm	165 mm	2212 5	10	60
412518	18 mm	165 mm	2213 2	10	60
412520	20 mm	165 mm	2214 9	10	60
412522	22 mm	165 mm	2215 6	10	60
412525	25 mm	165 mm	6051 6	10	60
412530	30 mm	165 mm	6053 0	10	60
412532	32 mm	165 mm	6054 7	10	60

PILOT DRILL BITS

- Adjust hole depth for screw head depth
- For drilling in wood, plastic and soft metal

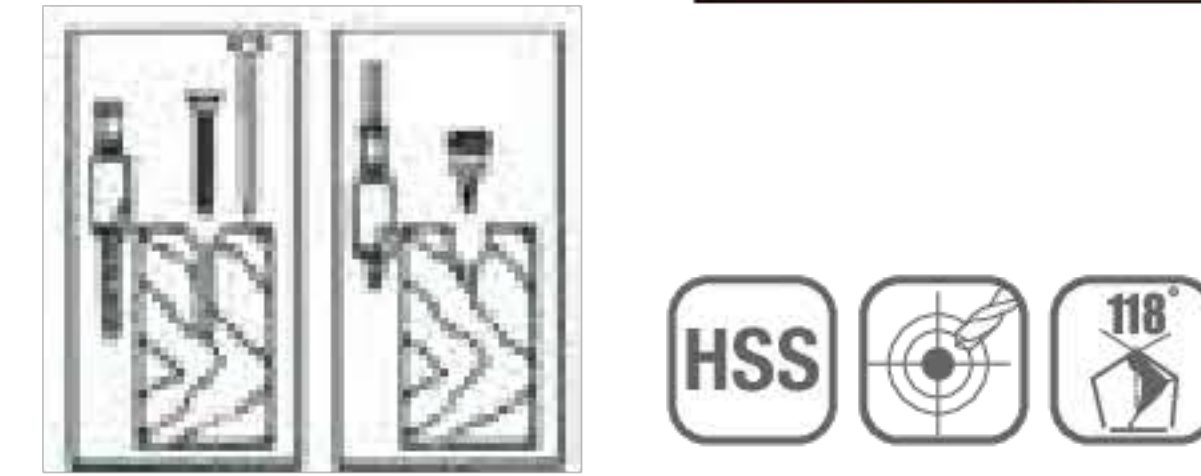

Item No.	Screw Size	Drill Size	EAN 69426292+	Inner	Outer
416101	#6	3/32 in. (2.4 mm)	2333 7	20	200
416103	#8	7/64 in. (2.8 mm)	2334 4	20	200
416105	#10	1/8 in. (3.2 mm)	2335 1	20	200
416107	#12	9/64 in. (3.6 mm)	2336 8	20	200

COUNTER SINK BIT

- High speed steel material, 5 fluted, 82 degree point, hex shank for quick chuck and extension
- For countersinking, deburring and chamfering in iron, steel, plastic and wood




Item No.	Drill Size	EAN 69426292 (A) 69708346 (B)	Inner	Outer
416141	10 mm (3/8 in.)	A + 4788 3	10	60
416143	13 mm (1/2 in.)	A + 4789 0	10	60
416146	16 mm (5/8 in.)	A + 4790 6	10	60
416149	19 mm (3/4 in.)	A + 4791 3	10	60
416151	25 mm (1 in.)	B + 7013 4	10	60

10 PC POCKET HOLE PLUGS SET



Item No.	Description	EAN 69426292+	Inner	Outer
413110	10 PC Pocket Hole Plugs Set	9399 6	25	400

EXTENSION BAR FOR WOOD SPADE

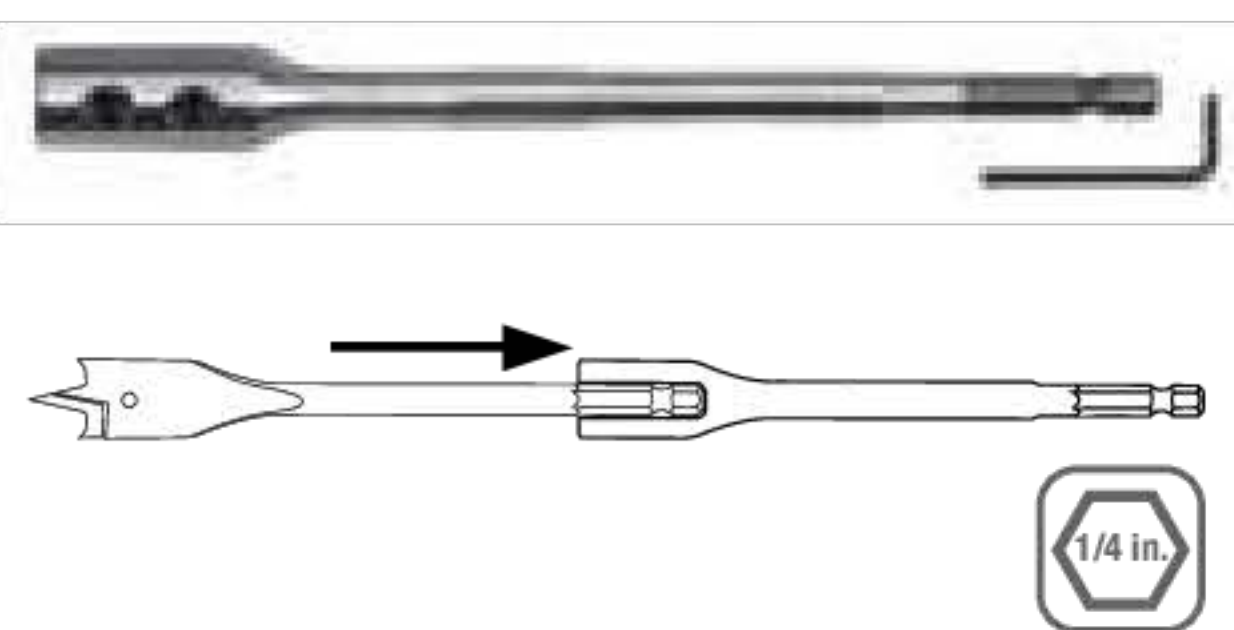

Item No.	Description	EAN 69426292+	Inner	Outer
411901	150 mm(6 in.)	2216 3	10	60
411903	300 mm(12 in.)	2217 0	10	60

6 PC 460 mm AUGER DRILL BITS SET



- Contents: 10, 12, 14, 16, 18, 20 mm

Item No.	Description	EAN 69426292+	Inner	Outer
412085	6 PC 460 mm Auger Drill Bits Set	5001 2	0	8

2 PC POCKET HOLE & DOWELING JIG



- For wood dowelling and pocket hole drilling funtion
- Contents: 6, 8, 10, 12 mm

Item No.	Description	EAN 69426292+	Inner	Outer
413006	2 PC Pocket Hole & Doweling Jig	5478 9	12	48

7 PC DRILL STOP SET




- Contents: 6 PC drill stop: 3, 3, 5, 6, 8, 10 mm
- 1 PC hex key

Item No.	Description	EAN 69426292+	Inner	Outer
416507	7 PC Drill Stop Set	4792 0	10	60



FLUSH TRIM ROUTER BITS


- For fast smooth trimming and through cutting of laminates, plywood, paneling and other materials

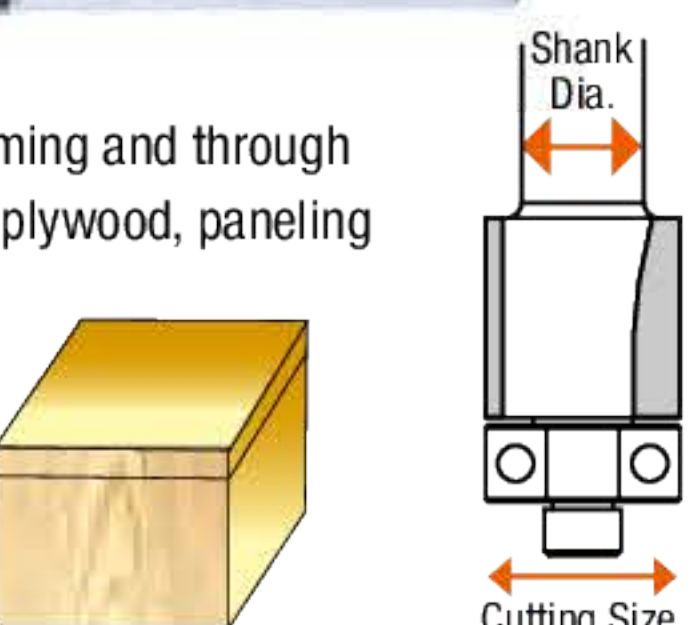

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420031	12.7 mm	8 mm	Flush Trim	2681 9	10	30
420331	1/2 in.	1/4 in.	Flush Trim	6258 9	10	30

KEY HOLE ROUTER BITS


- For making key hole slots for picture frames, shelves, mirrors, cabinets and other wall hangings

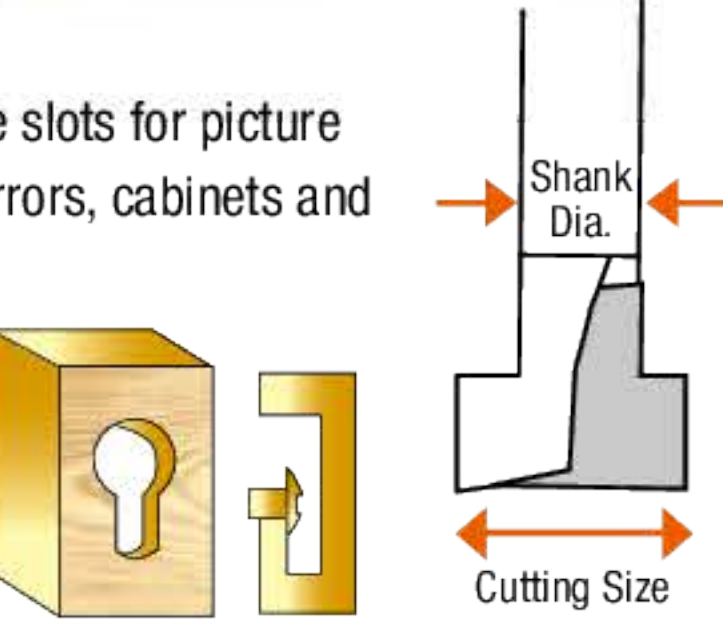

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420001	9.52 mm	8 mm	Key Hole	2676 5	10	30

2-FLUTE STRAIGHT ROUTER BITS

- For roughing operations where high production feed rates are essential
- Optimum chip clearance
- Specially designed tip for fast plunge cutting

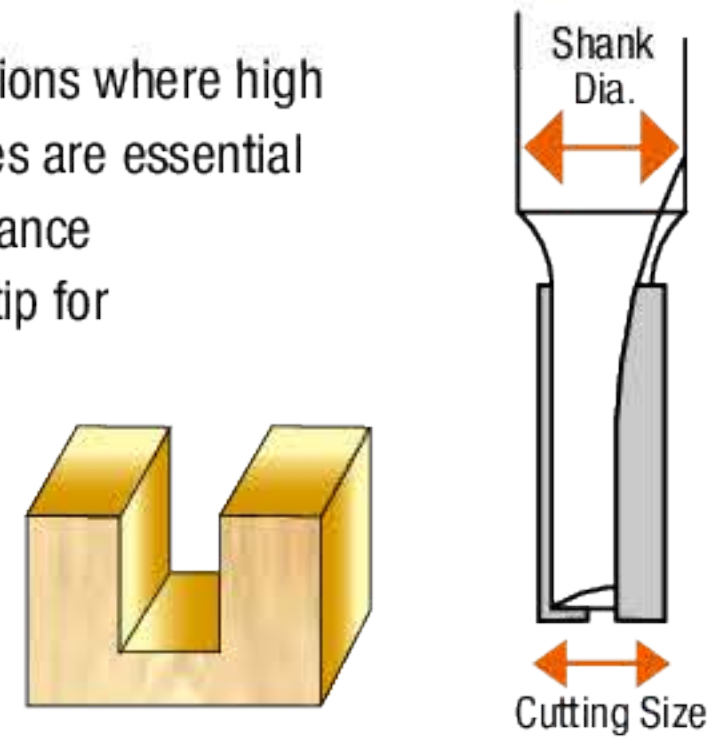


Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420011	6 mm	8 mm	2 Flute Straight	2677 2	10	30
420012	8 mm	8 mm	2 Flute Straight	3834 8	10	30
420013	10 mm	8 mm	2 Flute Straight	2678 9	10	30
420017	16 mm	8 mm	2 Flute Straight	2680 2	10	30
420311	1/4 in.	1/4 in.	2 Flute Straight	6253 4	10	30
420313	3/8 in.	1/4 in.	2 Flute Straight	6254 1	10	30
420315	1/2 in.	1/4 in.	2 Flute Straight	6255 8	10	30
420317	3/4 in.	1/4 in.	2 Flute Straight	6256 5	10	30



DOVETAIL ROUTER BITS


- For dovetail joint applications
- Cutting edges are precision ground for extra smooth cuts

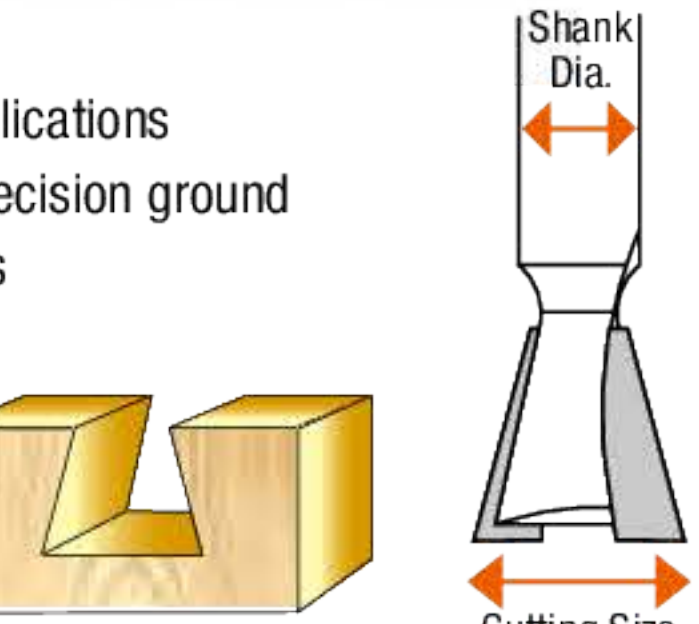

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420041	12.7 mm	8 mm	Dovetail	2682 6	10	30

V-GROOVE ROUTER BITS


- For door front grooving, lettering and sign work
- Shear angle cutter geometry for efficient cutting

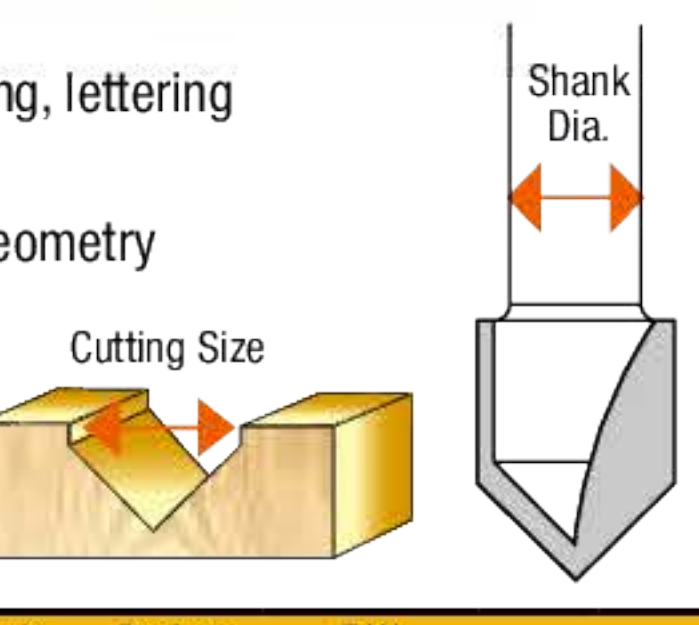

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420051	12.7 mm	8 mm	V-Groove	2683 3	10	30
420350	3/8 in.	1/4 in.	V-Groove	6261 9	10	30

CLASSICAL OGEE ROUTER BITS


- Adds classic beauty to your product with beautiful, decorative edging

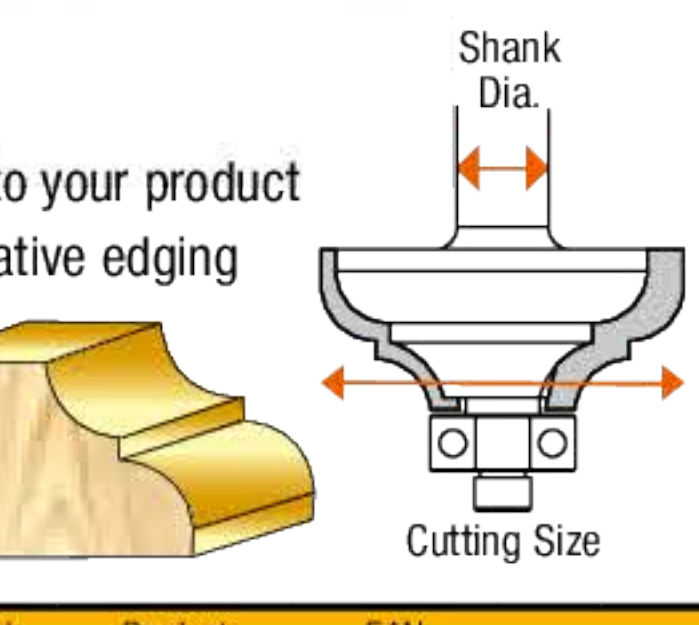

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420081	31.8 mm	8 mm	Classical Ogee	2686 4	10	30

COVE BOX ROUTER BITS


- For decorative edging

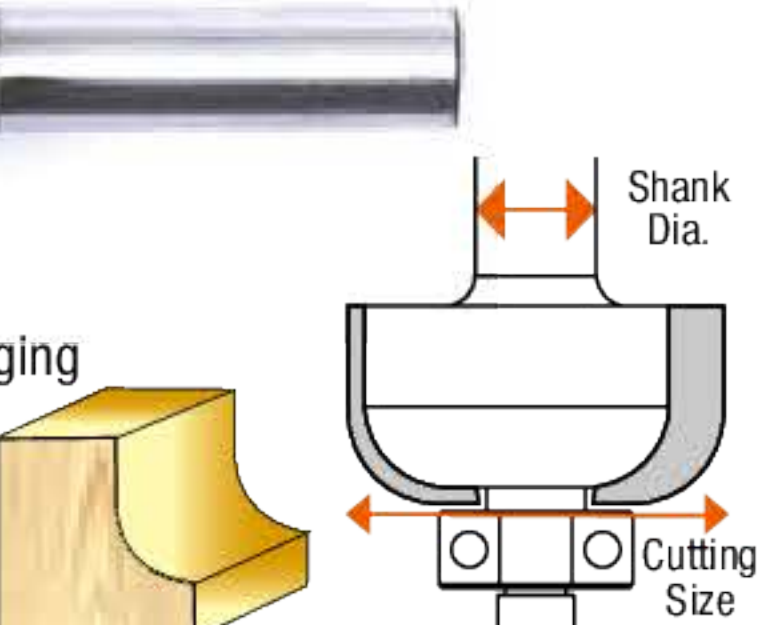

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420111	28.5 mm	8 mm	Cove Box	2693 2	10	30
420411	7/8 in.	1/4 in.	Cove Box	6271 8	10	30

CLASSICAL COVE ROUTER BITS


- For decorative edging

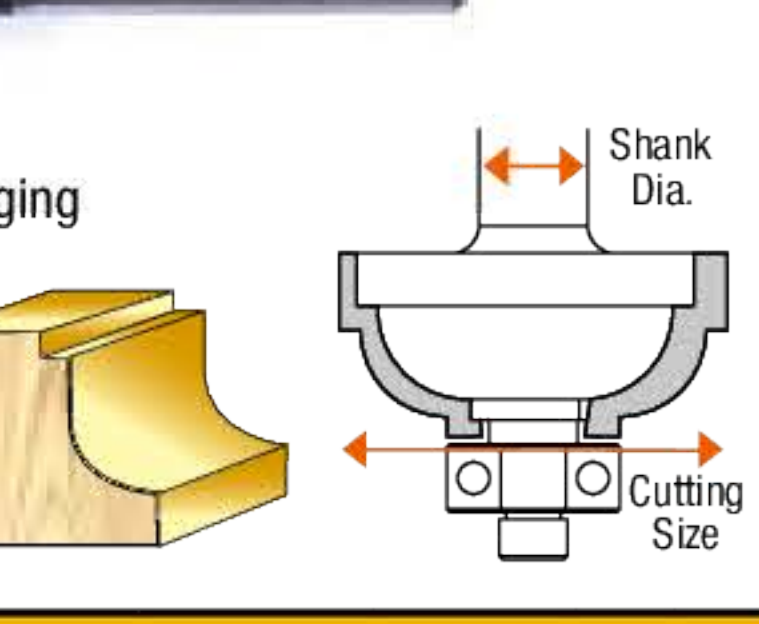

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420115	28.5 mm	8 mm	Classical Cove	3833 1	10	30
420381	1-1/8 in.	1/4 in.	Classical Cove	6266 4	10	30

TONGUE & GROOVE ROUTER BITS


- Produces perfectly fitted tongue and groove joints
- Ideal for cabinet doors

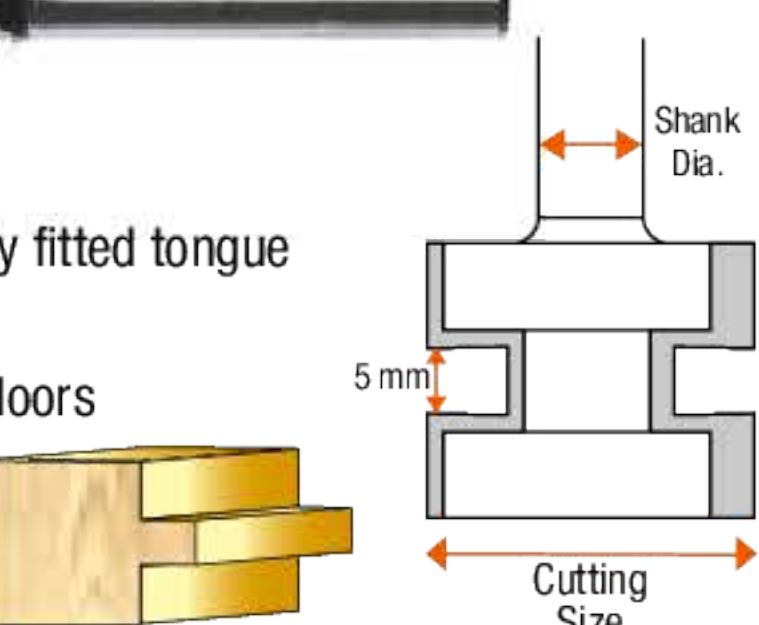

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420155	25 mm	5 mm	Tongue & Groove	2694 9	10	30

T-SLOT ROUTER BITS


- Cutting slots for joining biscuits

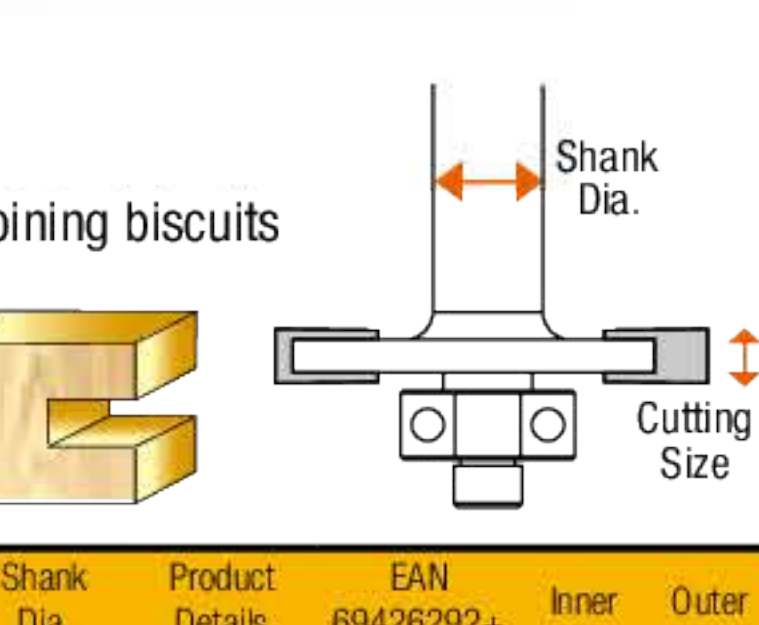

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420145	4 mm	8 mm	T-slot	3837 9	10	30
420151	5 mm	8 mm	T-slot	3838 6	10	30

CORE BOX ROUTER BITS


- For rounded grooves used in a variety of applications ranging from doors to columns

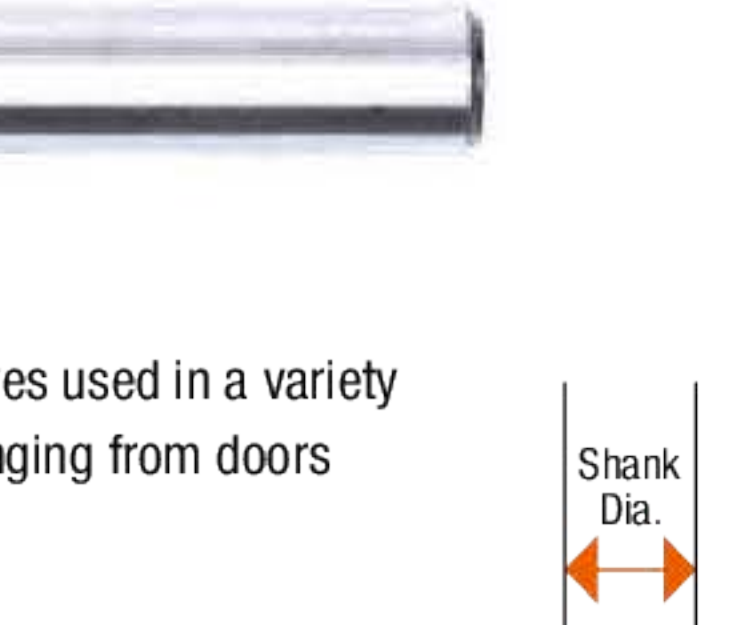

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420071	12 mm	8 mm	Core Box	2685 7	10	30
420371	1/4 in.	1/4 in.	Core Box	6263 3	10	30
420372	3/8 in.	1/4 in.	Core Box	6264 0	10	30
420373	1/2 in.	1/4 in.	Core Box	6265 7	10	30

ROUND-OVER ROUTER BITS


- Create decorative edging and drop-leaf table joints

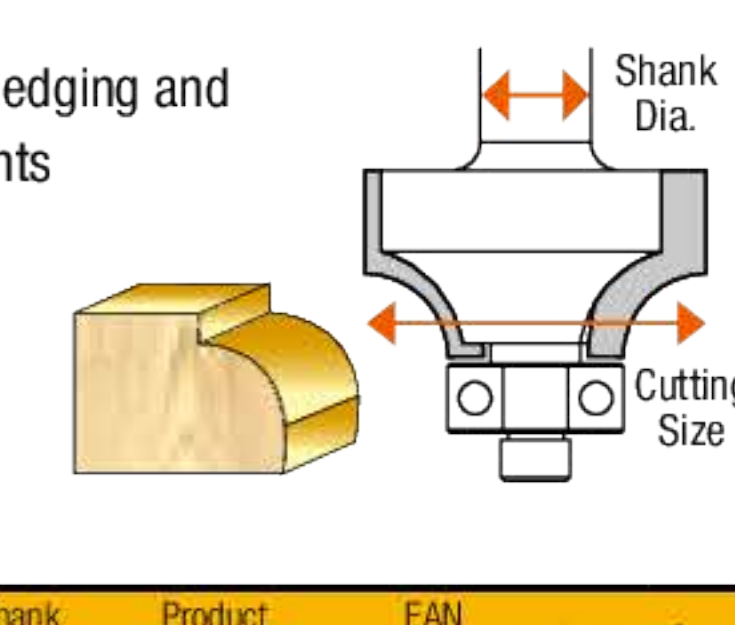

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420093	25.4 mm	8 mm	Corner Rounding	2688 8	10	30
420391	7/8 in.	1/4 in.	Corner Rounding	6267 1	10	30
420393	1 in.	1/4 in.	Corner Rounding	6268 8	10	30

BEADING ROUTER BITS


- Create decorative edging and drop-leaf table joints

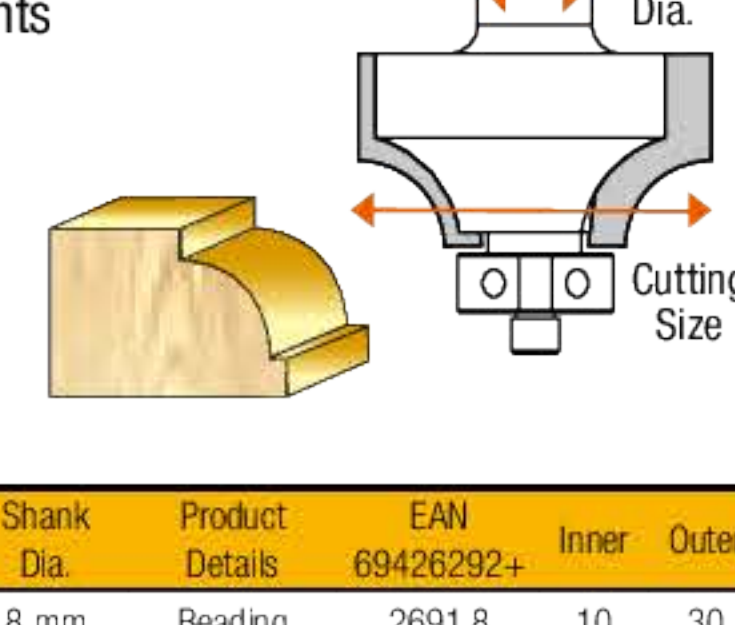

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420103	25.4 mm	8 mm	Beading	2691 8	10	30
420401	7/8 in.	1/4 in.	Beading	6269 5	10	30
420403	1 in.	1/4 in.	Beading	6270 1	10	30

45° CHAMFER ROUTER BITS


- For decorative bevel edging and concealed joints

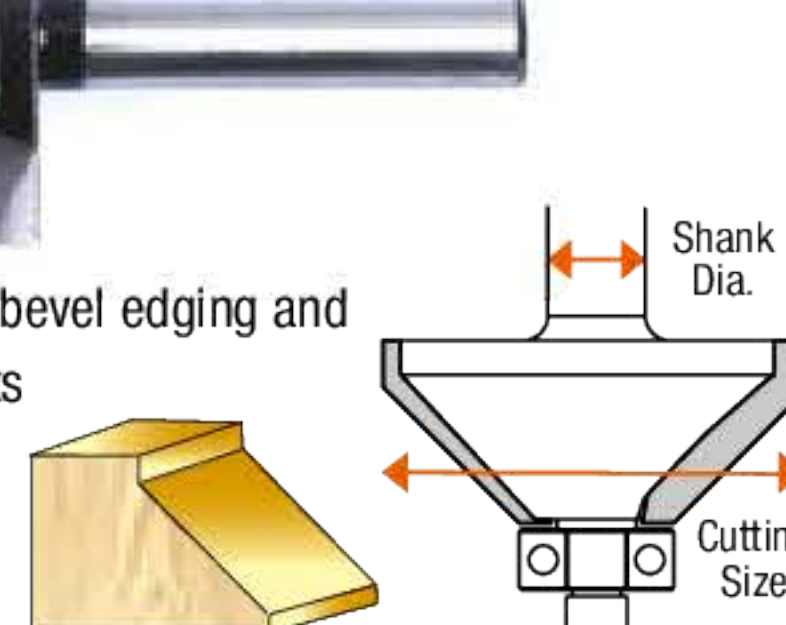

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420121	35 mm	8 mm	45° Chamfer	2694 9	10	30
420421	1 in.	1/4 in.	45° Chamfer	6273 2	10	30

ROMAN OGEE ROUTER BITS


- For decorative edging and period furniture

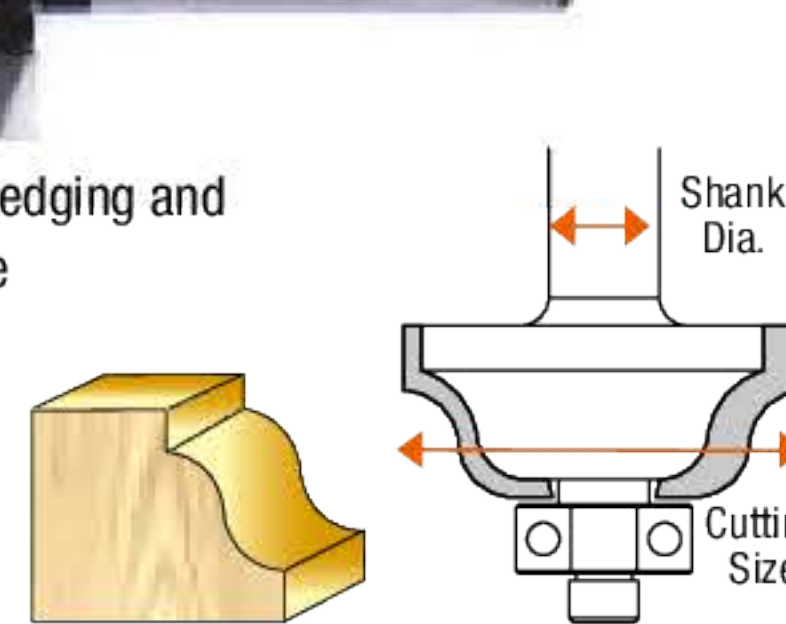

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420135	29 mm	8 mm	Roman Ogee	3835 3	10	30

CLASSICAL ROUTER BITS


- For decorative edging

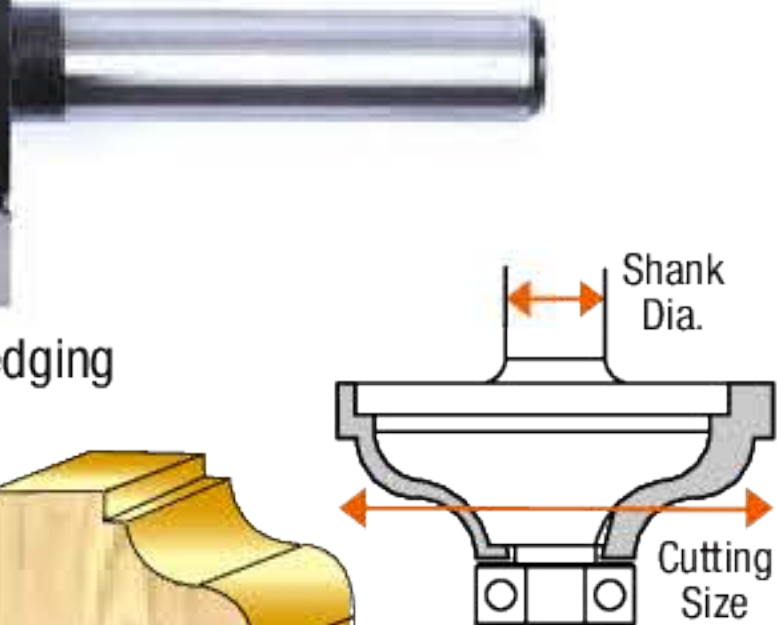

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420141	35 mm	8 mm	Classical	3836 2	10	30


RABBETING ROUTER BITS

- Equipped with pilot for making rabbit cuts without use of a router guide

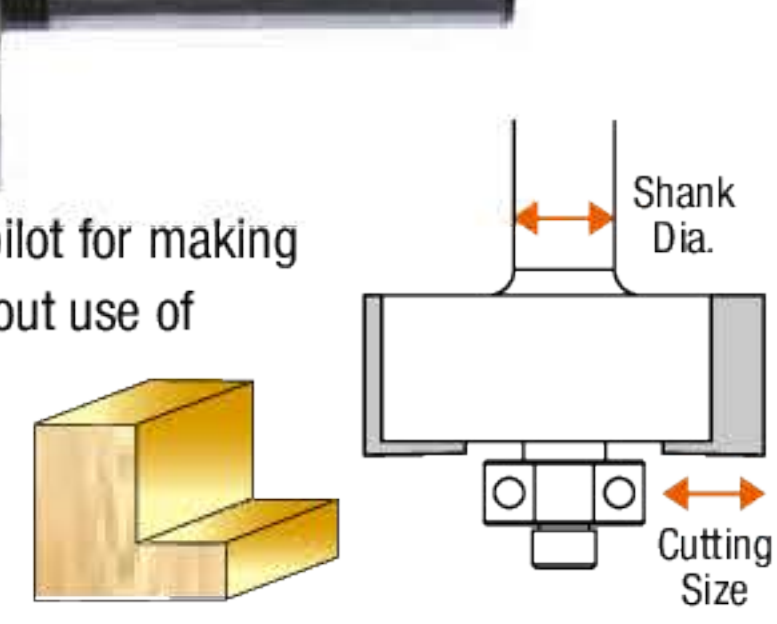

Item No.	Cutting Size	Shank Dia.	Product Details	EAN 69426292+	Inner	Outer
420161	9.5 mm	8 mm	Rabbeting	3840 9	10	30
420461	7/8 in.	1/4 in.	Rabbeting	6274 9	10	30

12 PC ROUTER BITS SET

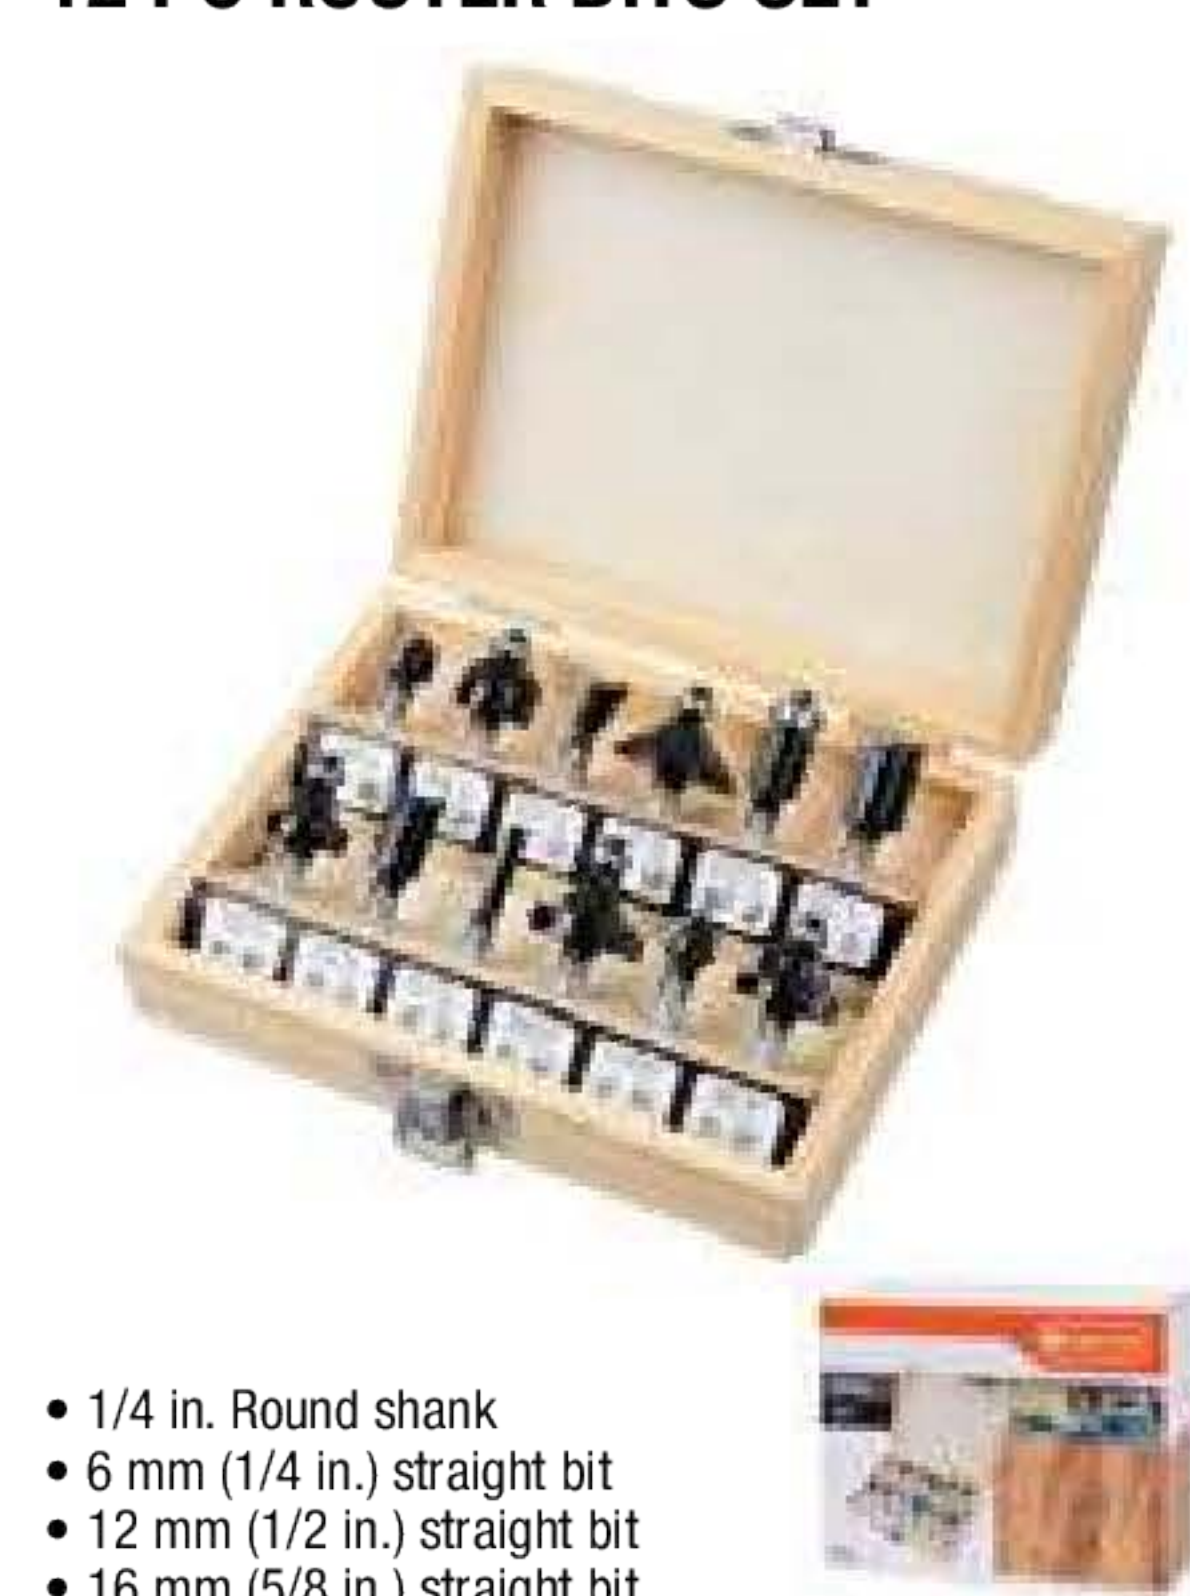

- 1/4 in. Round shank
- 6 mm (1/4 in.) straight bit
- 12 mm (1/2 in.) straight bit
- 16 mm (5/8 in.) straight bit
- 12.7 mm (1/2 in.) 90deg V grooving bit
- 12.7 mm (1/2 in.) dovetail bit
- 32 mm (1-1/4 in.) 45deg chamfer bit
- 12.7 mm (1/2 in.) flush trim bit
- R6.3 mm (1/4 in.) round over bit
- R9.5 mm (3/8 in.) round over bit
- R6.3 mm (1/4 in.) core box bit
- R6.3 mm (1/4 in.) cove bit
- R4 mm (5/32 in.) roman ogee bit

Item No.	Description	EAN 69426292+	Inner	Outer
420212	12 PC	3055 7	0	40

18 PC COMBO DRILL SET




- HSS twist drill bits for steel, cast iron, malleable iron, non-ferrous metal and plastic
- Concrete drill bits for concrete, reinforced concrete, brick, block and masonry
- Wood drill bits for soft wood, hard wood, plywood, hardboards and veneer wood

Item No.	Description	EAN	Inner	Outer
418033	3,4,5,6,8,10 mm	69708346+	7854 3	6 24

21 PC MAGNETIC CASE BIT SET



- 15 PC 25 mm S2 bits:
 - ⊕ #1 x 2, #2 x 4, #3
 - ⊖ 4 x 2, 5.5 x 2, 6.5 mm
 - ⊕ #1, #2, #3
- 3 PC nut drivers: 6, 8, 10 mm
- 60 mm stainless steel extension bar
- Magnetic storage case
- 2 PC 50 mm S2 bits:
 - ⊕ #2
 - ⊖ 5.5 mm

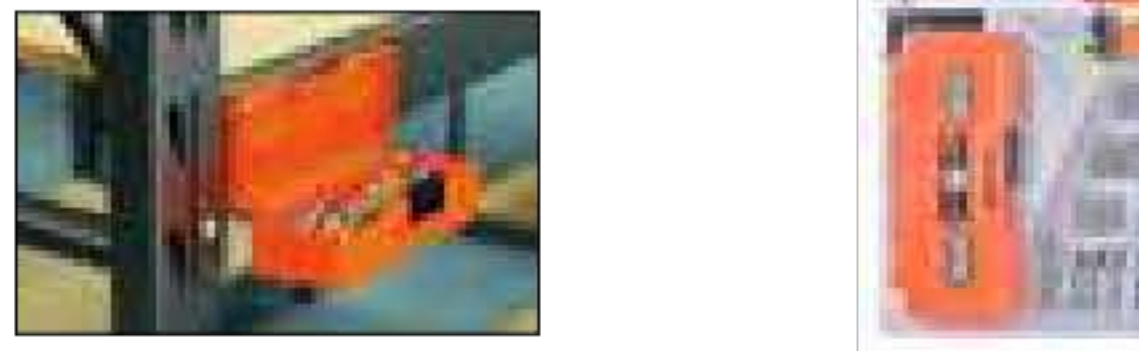

Item No.	Description	EAN	Inner	Outer
418321	21 PC Magnetic Case Bit Set	69426292+	5227 6	6 24

13 PC QUICK CHANGE DRILL BIT SET

419013 - Metric

- 6 PC 50 mm bits:
 - ⊕ #1, #2, #3
 - ⊖ 5, 6, 7 mm
- 3 PC wood spades - 12, 19, 25 mm
- 3 PC HSS drills - 1.5, 3.0, 5.0 mm
- 1 PC quick change chuck



419014 - SAE

- 6 PC 2 in. bits:
 - ⊕ #1, #2, #3
 - ⊖ 3/16, 1/4, 9/32 in.
- 3 PC wood spades - 1/2, 3/4, 1 in.
- 3 PC HSS drills - 1/16, 1/8, 3/16 in.
- 1 PC quick change chuck



Item No.	Description	EAN	Inner	Outer
419013	13 PC Drill Bit Set - Metric	69426292+	4627 5	6 36
419014	13 PC Drill Bit Set - SAE	4865 1	6 36	

25 PC HSS COBALT TWIST DRILL



- Industrial grade cobalt M35 high speed steel, 135 degree split, fully ground body
- For stainless steel, steel, cast steel and other hard materials



Contents:
1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm

Item No.	Description	EAN	Inner	Outer
410180	25 PC HSS Cobalt Twist Drill Bits Set	69762270+	3314 2	5 10

25 PC HSS TWIST DRILL BITS SET



- Industry grade #6542 high speed steel material, 135 degree split, fully ground body
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Contents:
1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13 mm

Item No.	Description	EAN	Inner	Outer
410183	25 PC HSS Twist Drill Bits Set	69762270+	3315 9	5 10

7 PC MAGNETIC NUT DRIVER SET



Item No.	Description	EAN	Inner	Outer
418607	7 PC Magnetic Nut Driver Set	69426292+	5788 2	18 54



31 PC QUICK CHANGE DRIVING BIT SET



418130 - Metric

- 30 PC S2 bits:
 - ⊕ 3, 4.5, 5.5, 6.5 mm
 - ⊕ #0, #1 x 2, #2 x 2, #3 x 2
 - ⊕ #0, #1 x 2, #2 x 2, #3 x 2
 - ⊕ 3, 4, 5, 6 mm
 - ⊕ T-10, T-15, T-20, T-25, T-27, T-30, T-35, T-40
- 1 PC stainless steel quick change chuck

418132 - SAE

- 30 PC CR-V bits:
 - ⊕ 1/8, 5/32, 3/16, 1/4 in.
 - ⊕ #0, #1 x 2, #2 x 2, #3 x 2
 - ⊕ #0, #1 x 2, #2 x 2, #3 x 2
 - ⊕ 1/8, 5/32, 3/16, 1/4 in.
 - ⊕ T-10, T-15, T-20, T-25, T-27, T-30, T-35, T-40
- 1 PC stainless steel quick change chuck

Item No.	Description	EAN	Inner	Outer
418130	31 PC Bit Set - Metric	3973 4	12 48	
418132	31 PC Bit Set - SAE	3046 5	12 48	

61 PC QUICK CHANGE DRIVING BIT SET



418159 - Metric

- 59 PC S2 bits:
 - ⊕ 3 x 2, 4.5 x 2, 5.5 x 2, 6.5 x 2 mm
 - ⊕ #0 x 2, #1 x 2, #2 x 5, #3 x 2
 - ⊕ #0 x 2, #1 x 2, #2 x 5, #3 x 2
 - ⊕ 2, 3, 4, 5, 6, 8 mm
 - 1/16, 3/32, 1/8, 5/32, 3/16, 7/32 in.
 - ⊕ T-8, T-9, T-10, T-15, T-20, T-25, T-27, T-30, T-35, T-40
 - ⊕ T-10, T-15, T-20, T-25, T-27, T-30, T-40
- 1 PC bit adaptor
- 1 PC stainless steel quick change chuck

418162 - SAE

- 59 PC CR-V bits:
 - ⊕ 1/8 x 2, 5/32 x 2, 3/16 x 2, 1/4 x 2 in.
 - ⊕ #0 x 2, #1 x 2, #2 x 5, #3 x 2
 - ⊕ #0 x 2, #1 x 2, #2 x 5, #3 x 2
 - ⊕ 2, 3, 4, 5, 6, 8 mm
 - 1/16, 3/32, 1/8, 5/32, 3/16, 7/32 in.
 - ⊕ T-8, T-9, T-10, T-15, T-20, T-25, T-27, T-30, T-35, T-40
 - ⊕ T-10, T-15, T-20, T-25, T-27, T-30, T-40
- 1 PC bit adaptor
- 1 PC stainless steel quick change chuck

Item No.	Description	EAN	Inner	Outer
418159	61 PC Bit Set - Metric	3974 1	6 24	
418162	61 PC Bit Set - SAE	4840 8	6 24	

117 PC QUICK CHANGE DRIVING BIT SET



115 PC CR-V bits

- ⊕ 3, 4, 4.5, 5, 5.5, 6, 6.5, 7, 8 mm; 1/8, 5/32, 3/16, 7/32, 1/4 in.
- ⊕ #0 x 2, #1 x 2, #2 x 6, #3 x 2
- ⊕ #0 x 2, #1 x 2, #2 x 5, #3 x 2
- ⊕ 1.5, 2, 2.5, 3, 4, 5, 5.5, 6, 8 mm
- 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4 in.
- ⊕ 2, 2.5, 3, 4, 5, 6 mm
- 5/64, 3/32, 7/64, 1/8, 9/64, 5/32 in.
- ⊕ T-8 x 2, T-10 x 2, T-15 x 2, T-20 x 2, T-25 x 2, T-27 x 2, T-30 x 2, T-35 x 2, T-40 x 2
- ⊕ T-10, T-15, T-20, T-25, T-27, T-30, T-35, T-40
- ⊕ #0, #1, #2, #3
- ⊕ 4, 6, 8, 10
- ⊕ #1, #2, #3, #4
- ⊕ M5, M6, M8
- ⊕ 6, 8, 10
- ⊕ C1, C2, C3

1 PC bit adaptor

1 PC stainless steel quick change chuck

Item No.	Description	EAN	Inner	Outer
418210	117 PC Bit Set	69426292+	3975 8	6 12

55 PC DRILL & BIT SET



11 PC Ti-coated HSS drills:

- 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5 mm
- 5 PC concrete drills: 4, 5, 6, 8, 10 mm
- 5 PC wood drills: 4, 5, 6, 8, 10 mm
- 3 PC wood spades: 13, 16, 19 mm
- 19 PC 25 mm CR-V bits:
 - ⊕ 4, 5, 6 mm
 - ⊕ #1, #2, #3
 - ⊕ #1, #2, #3
 - ⊕ 3, 4, 5, 6 mm
 - ⊕ T-10, T-15, T-20, T-25, T-27, T-30
- 1 PC bit / socket adaptor
- 6 PC 50 mm CR-V bits:
 - ⊕ #1, #2, #3
 - ⊕ 4, 5, 6 mm
- 3 PC nut drivers: 6, 8, 10 mm
- 1 PC 60 mm extension bar
- 1 PC 12.7 mm countersink

Item No.	Description	EAN	Inner	Outer
418455	55 PC Drill & Bit Set	69426292+	3975 8	0 10

37 PC DRILL BIT SET



- 16 x ⊕ #1, #2, #3 ⊖ 4, 5, 6, 7 mm
- ⊕ #1, #2, #3 ⊕ T-15, T-20, T-25, T-30
- 1 x 60 mm
- 5 x 2, 2, 3, 4, 5 mm
- 1 x 13 mm
- 5 x 4, 5, 5.5, 6, 7 mm
- 5 x 4, 5, 6, 7, 8 mm
- 3 x 7, 8, 10 mm

Item No.	Description	EAN	Inner	Outer
418713	37 PC Drill Bit Set	69426292+	6031 8	6 24

40 PC DRILL BIT SET



- 16 x ⊕ #1, #2, #3 ⊖ 4, 6, 7 mm
- ⊕ #1, #2, #3 ⊕ T-15, T-20, T-25
- ⊕ 3, 4, 5, 6 mm
- 1 x 60 mm
- 11 x 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5 mm
- 3 x 18, 22, 32 mm
- 4 x 4, 5, 6, 7 mm
- 1 x 13 mm
- 4 x 4, 5, 6, 8 mm

Item No.	Description	EAN	Inner	Outer
418714	40 PC Drill Bit Set	69426292+	6032 5	6 24

78 PC DRILL BIT SET



- 40 x S2
- ⊕ #0 x 2, #1 x 2, #2 x 3, #3 x 3
 - ⊖ 4 x 2, 6 x 2, 7 x 2 mm
 - ⊕ #0 x 2, #1 x 2, #2 x 3, #3 x 3
 - ⊕ T-10, T-10, T-15, T-15, T-20, T-20, T-25, T-25, T-30, T-40
 - 3, 4, 5, 6 mm
- 1 x 60 mm
- 1 x 13 mm
- 4 x 5, 6, 8 mm
- 1 x 5, 6, 8 mm
- 5 x 32, 38, 44, 54 mm
- 11 x 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8 mm
- 6 x 4, 5, 5.5, 6, 7, 8 mm
- 5 x 4, 5, 6, 8, 10 mm
- 4 x 12, 16, 20, 22 mm

Item No.	Description	EAN	Inner	Outer
418737	78 PC Drill Bit Set	69426292+	6034 9	0 8

90 PC DRILL BIT SET



- 40 x S2
- ⊕ #0 x 2, #1 x 2, #2 x 3, #3 x 3
 - ⊖ 4 x 2, 6 x 2, 7 x 2 mm
 - ⊕ #0 x 2, #1 x 2, #2 x 3, #3 x 3
 - ⊕ T-10, T-10, T-15, T-15, T-20, T-20, T-25, T-25, T-30, T-40
 - 3, 4, 5, 6 mm
- 1 x 60 mm
- 1 x 13 mm
- 4 x 5, 6, 8 mm
- 1 x 5, 6, 8 mm
- 5 x 32, 38, 44, 54 mm
- 7 x 4, 5, 6, 7, 8, 9, 10 mm
- 15 x 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5.5, 6, 6.5, 7, 8, 10 mm
- 6 x 4, 5, 5.5, 6, 7, 8 mm
- 5 x 4, 5, 6, 8, 10 mm
- 4 x 12, 16, 20, 22 mm

Item No.	Description	EAN	Inner	Outer
418739	90 PC Drill Bit Set	69426292+	6035 6	0 8

99 PC DRILL BIT SET




- 42 x S2 25 mm
- ⊕ #1 x 3, #2 x 5, #3 x 2
 - ⊖ 4, 5 x 3, 6 x 3, 7 mm
 - ⊕ #1 x 3, #2 x 5, #3 x 2
 - ⊕ T-10, T-10, T-15, T-15, T-20, T-20, T-25, T-25, T-27, T-27, T-30, T-30
 - 3, 4 mm
- 13 x 1.5, 2, 2.5, 3, 3.3, 3.5, 4, 4.5, 5.5, 5.5, 6, 7 mm
- 5 x 3, 5, 6, 8, 10 mm
- 13 x 3, 3.3, 3.5, 4, 4.5, 5.5, 5.5, 6, 6.5, 7, 7.5, 8 mm
- 1 x 60 mm
- 12 x S2 50 mm
- ⊕ #1, #2, #3
 - ⊖ 4, 5, 6, 6, 7 mm
 - ⊕ T-10, T-15, T-20
- 7 x 5, 6, 8, 10, 11, 12, 13 mm
- 1 x 32, 38, 44, 54 mm
- 1 x 13 mm

Item No.	Description	EAN	Inner	Outer
418740	99 PC Drill Bit Set	69426292+	6036 3	0 8

76 PC DRILLS & BITS SET - METRIC

- 12 x HSS
- 1.5, 1.5, 2, 2, 2.5, 2.5, 3, 3.2, 3.5, 4, 5, 6 mm
- 4 x HCS
- 3, 4, 5, 6 mm
- 4 x HM TCT
- 3, 4, 5, 6 mm
- 2 x HCS
- 13, 25 mm
- 3 x CRV
- 6, 8, 10 mm
- 1 x HCS
- 60 mm
- 34 x CRV
- ⊕ #1 x 2, #2 x 4, #3 x 2
 - ⊖ 3, 4, 5, 5, 6, 6, 7 mm
 - ⊕ #1, #2, #3
 - ⊕ T-10, T-15, T-20, T-25, T-27, T-30, T-40
 - ⊕ #1, #2 x 2, #3
 - 2, 3, 4, 5, 6 mm
- 9 x CRV
- ⊕ #1, #2, #3
 - ⊕ #1, #2, #3
 - ⊖ 4, 6, 7 mm
- 4 x CRV
- 3, 5, 8 mm
- 1 x HCS
- 12.5 mm
- 2 x HCS
- ⊕ #2 x 2

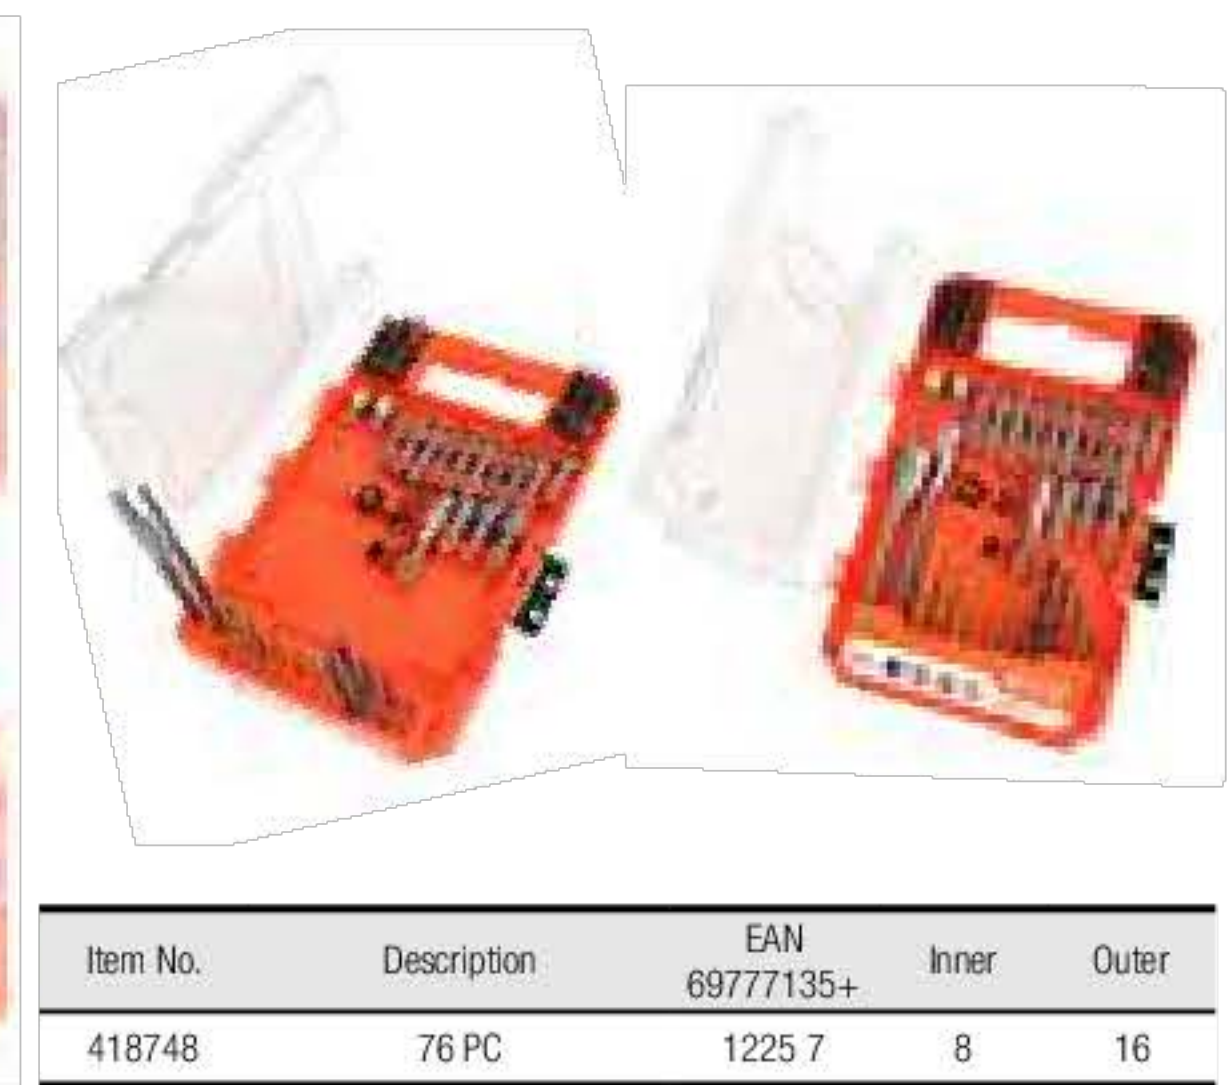

Item No.	Description	EAN	Inner	Outer
418748	76 PC	69777135+	1225 7	8 16

90 PC DRILL & BIT SET

- 1 x HCS
- 12 mm
- 5 x HCS
- 3, 5, 6, 8 mm
- 1 x HCS
- 60 mm
- 5 x HCS
- 32, 38, 45, 54 mm
- 1 x HCS
- 60 mm
- 2x HCS
- 16, 22 mm
- 5 x HCS
- 3, 4, 5, 6, 8 mm
- 5 x HM TCT
- 3, 4, 5, 6, 8 mm
- 13 x HSS
- 1.5, 1.5, 2, 2, 2.5, 2.5, 3, 3.5, 4, 4.5, 5, 6, 6.5 mm
- 46 x CRV
- ⊕ #1 x 2, #2 x 4, #3 x 3
 - ⊖ (3, 4, 5, 6, 7 mm) x 2
 - ⊕ #1 x 2, #2 x 3, #3 x 2
 - ⊕ T-10, T-15, T-20, T-25, T-27, T-30
 - ⊕ #1 x 3, #2 x 4, #3 x 2
 - 2, 3, 4, 5, 6 mm
- 6 x CRV
- 6, 7, 8, 9, 10, 12 mm



Item No.	Description	EAN	Inner	Outer
418744	90 Pc Drills & Bits Set	69743345+	5549 6	0 16

120 PC DRILLS & BITS SET

- 88 x CRV 25 mm
- ⊕ #0 x 3, #1 x 3, #2 x 6, #3 x 4
 - ⊖ 3 mm x 3, 4 mm x 3, 5 mm x 4, 6 mm x 4, 7 mm x 1
 - ⊕ #0 x 3, #1 x 8, #2 x 6, #3 x 6
 - ⊕ T-10, T-10, T-15, T-15, T-20, T-20, T-25, T-25, T-27, T-30
 - ⊕ #0 x 2, #1 x 2, #2 x 6, #3 x 2
 - 2, 2.5, 3, 4, 5, 6 mm
 - 5/64, 3/32, 1/8, 5/32, 3/16, 1/4 in.
- 15 x CRV 50 mm
- ⊕ #1, #2, #3
 - ⊖ 3, 4, 5, 6, 7 mm
 - ⊕ #0, #1, #2, #3
 - ⊕ #1, #2, #3
- 5 x CRV
- 6, 8, 10, 11, 13 mm
- 1 x HCS
- 60 mm
- 11 x HSS
- 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 5, 6, 6.5, 8 mm



Item No.	Description	EAN	Inner	Outer
418746	120 PC Drills & Bits Set	69762270+	3108 7	0 16

400 PC DRILL BITS SET



- 14 x HSS
- 1.5, 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 4.8, 5, 5.5, 6, 6.5 mm
- 5 x HM TCT
- 4, 5, 6, 8, 10 mm
- 5 x HCS
- 4, 5, 6, 8, 10 mm
- 2 x HCS
- 13, 16, mm
- 6 x CRV
- 6, 7, 8, 9, 10, 11 mm
- 1 x HCS
- 60 mm
- 1 x HCS
- 60 mm
- 1 x HCS
- 60 mm
- 52 x CRV 25 mm
- ⊖ 3, 3, 4, 4, 5, 5, 6 mm
 - ⊕ #0, #1 x 3, #2 x 5, #3 x 2
 - ⊕ #0, #1 x 3, #2 x 4, #3 x 2
 - ⊕ T10, T15, T20, T25, T27, T30, T35, T40
 - S0, S1, S2 x 2, S3
 - 2, 3, 4, 5, 6 mm, 5/64, 1/8, 5/32, 3/16, 1/4 in.
- 11 x CRV 50 mm
- ⊖ 4, 5, 6 mm
 - ⊕ #1, #2, #3
 - ⊕ #1, #2, #3
 - ⊕ T15, T20
- 4 x CRV
- 3, 5, 8 mm
- 3 x CRV
- 3, 5, 8 mm
- 90 x CRV
- 3 x 30 mm x 45 pc
 - 4 x 40 mm x 20 pc
 - 5 x 50 mm x 15 pc
 - 5 x 60 mm x 10 pc
- 205 x CRV
- 5 mm x 85 pc,
 - 6 mm x 65 pc,
 - 8 mm x 35 pc,
 - 10 mm x 20 pc

Item No.	Description	EAN	Inner	Outer
418505	400 PC Drill Bits Set	69762270+	3320 3	0 5



28 PC QUICK CHANGE BIT SET

418113

- 24 PC 50 mm CR-V bits
 - ➕ #1 x 2, #2 x 4, #3 x 2
 - ➖ 5, 6 x 2, 7 mm
 - ➕ #1, #2 x 2, #3
 - ➖ 3, 4, 5 mm
 - ➕ T-10, T-15, T-20, T-25, T-30
- 1 PC quick change holder
- 3 PC CR-V nut drivers - 6, 8, 10 mm

418115

- 24 PC 50 mm CR-V bits
 - ➕ #1, #2 x 10, #3
 - ➖ 3/16, 1/4 x 2, 9/32 in.
 - ➖ #1, #2 x 6, #3
- 1 PC quick change holder
- 3 PC CR-V nut drivers - 1/4, 5/16, 3/8 in.

Item No.	Description	EAN 69426292+	Inner	Outer
418113	28 PC Quick Change Bit Set - Metric	0821 1	6	12
418115	28 PC Quick Change Bit Set - SAE	0822 8	6	12

15 PC TI-COATED HSS TWIST DRILL SET



- Ti-coated, #4241 HSS, 118° split, fully ground body
- For steel, cast iron, malleable iron, non-ferrous metal and plastic



Item No.	Description	EAN 69426292+	Inner	Outer
418011	1.5, 1.5, 2.0, 2.0, 2.5, 2.5, 3.0, 3.2, 3.5, 4.0, 4.5, 5.0, 6.0, 8.0, 10.0 mm	0810 5	6	12
418013	1/16, 1/16, 5/64, 5/64, 3/32, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8 in.	0811 2	6	12

15 PC CONCRETE DRILL SET



- High carbon steel body with YG8 carbide tip
- For concrete, reinforced concrete, brick, block and masonry



Item No.	Description	EAN 69426292+	Inner	Outer
418051	3.0, 3.0, 3.0, 4.0, 4.0, 4.0, 5.0, 5.0, 5.0, 6.0, 6.0, 8.0, 8.0, 10.0, 10.0 mm	0814 3	6	12
418053	1/8, 1/8, 1/8, 5/32, 5/32, 5/32, 3/16, 3/16, 3/16, 1/4, 1/4, 5/16, 5/16, 3/8, 3/8 in.	0815 0	6	12

15 PC WOOD DRILL SET



- High carbon steel, brad point tip
- For soft wood, hard wood, plywood, hardboards and veneer wood



Item No.	Description	EAN 69426292+	Inner	Outer
418081	3.0, 3.0, 3.0, 4.0, 4.0, 4.0, 5.0, 5.0, 5.0, 6.0, 6.0, 8.0, 8.0, 10.0, 10.0 mm	0818 1	6	12
418083	1/8, 1/8, 1/8, 5/32, 5/32, 5/32, 3/16, 3/16, 3/16, 1/4, 1/4, 5/16, 5/16, 3/8, 3/8 in.	0819 8	6	12

20 PC DRILL & BIT SET



- 418101**
- 7 PC hex shank HSS drill bits - 1.5, 2, 3, 4, 4.5, 5, 6 mm
 - 1 PC quick change holder
 - 9 PC 50 mm CR-V bits -
 - ➕ #1, #2, #3
 - ➖ 4, 5.5, 6.5 mm
 - ➕ #1, #2, #3
 - 3 PC CR-V nut drivers - 6, 8, 10 mm

- 418103**
- 7 PC hex shank HSS drill bits - 1/16, 3/32, 1/8, 5/32, 3/16, 7/32, 1/4 in.
 - 1 PC quick change holder
 - 9 PC 50 mm CR-V bits -
 - ➕ #1, #2, #3
 - ➖ 3/16, 1/4, 9/32 in.
 - ➖ #1, #2, #3
 - 3 PC CR-V nut drivers - 1/4, 5/16, 3/8 in.

Item No.	Description	EAN 69426292+	Inner	Outer
418101	20 PC Drill & Bit Set - Metric	0820 4	6	12
418103	20 PC Drill & Bit Set - SAE	4625 1	6	12

17 PC COMBO DRILL SET



- 12 PC Ti-coated #4241 HSS drill bits



- 5 PC YG8 carbide tip masonry drill bits



Item No.	Description	EAN 69426292+	Inner	Outer
418021	12 PC - 1.5, 2.0, 2.5, 3.0, 3.2, 3.5, 4.0, 4.5, 4.8, 5.0, 5.5, 6.0 mm	0812 9	6	12
418023	5 PC - 3.0, 5.0, 6.0, 8.0, 10.0 mm			
418023	12 PC - 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 13/64, 7/32, 1/4 in.	0813 6	6	12
	5 PC - 1/8, 3/16, 1/4, 5/16, 3/8 in.			

29 PC DRIVING BIT SET



- 418107**
- 24 PC 25 mm CR-V bits -
 - ➕ #1 x 2, #2 x 4, #3 x 2
 - ➖ 4, 5.5 x 2, 6.5 mm
 - ➕ #1, #2 x 2, #3
 - ➖ 3, 4, 5 mm
 - ➕ T-10, T-15, T-20, T-25, T-30
 - ➕ #2
 - 2 PC 50 mm CR-V bits -
 - 1 PC 80 mm magnetic driver guide
 - 2 PC CR-V nut drivers - 6, 8 mm

- 418109**
- 24 PC 25 mm CR-V bits -
 - ➕ #1, #2 x 10, #3
 - ➖ 3/16, 1/4 x 2, 9/32 in.
 - ➖ #1, #2 x 6, #3
 - ➕ #2
 - 2 PC 50 mm CR-V bits -
 - 1 PC magnetic driver guide
 - 2 PC CR-V nut drivers - 1/4, 5/16 in.

Item No.	Description	EAN 69426292+	Inner	Outer
418107	29 PC Bit Set - Metric	5129 3	6	12
418109	29 PC Bit Set - SAE	5130 9	6	12



42 PC IMPACT BIT SET

- 32 x #1 x 2, #2 x 8, #3 x 2
 #1, #2 x 2, #3
 T-15, T-20 x 2, T-25 x 2,
 T-30 x 2, T-40
 5.5, 6.5 mm
 3 x 2, 4 x 2, 5 mm
 #2
 7 x #2 x 2
 T-20, T-25
 #2 x 2
 5 mm
- 2 x 6, 8 mm
 1 x 60 mm



Item No.	Description	EAN 69743345+	Inner	Outer
455842	42 PC	5092 7	5	20

36 PC IMPACT BIT SET

- 24 x #1 x 2, #2 x 8, #3 x 2
 #1, #2, #3
 T-15, T-20, T-25, T-30
 5.5, 6.5 mm
 3, 4, 5 mm
 5 x #2 x 2
 T-20, T-25
 2 x 10, 12 mm
- 3 x 6, 8, 10 mm
 1 x 60 mm
 1 x 3/8 in.



Item No.	Description	EAN 69743345+	Inner	Outer
455844	36 PC	5093 4	5	20

37 PC IMPACT BIT SET

- 24 x #1 x 2, #2 x 6, #3 x 2
 #1, #2, #3
 T-15, T-20 x 2, T-25 x 2, T-30
 5.5, 6.5 mm
 3, 4, 5 mm
 2 x 8, 10 mm
 1 x 60 mm
 8 x 1.5, 2, 2.5, 3, 3.5, 4, 5, 6 mm



Item No.	Description	EAN 69743345+	Inner	Outer
455848	37 PC	5095 8	5	20

47 PC IMPACT BIT SET

- 32 x #1 x 2, #2 x 4, #3 x 2
 #1 x 2, #2 x 4, #3 x 2
 T-15, T-20 x 2,
 T-25 x 2, T-30 x 2, T-40
 5.5, 6.5 mm
 3 x 2, 4 x 2,
 5 x 2 mm
 10 x #2 x 10
- 4 x 6, 8, 10, 12 mm
 1 x 60 mm
- Lock
 Dovetail
 tenon



Item No.	Description	EAN 69743345+	Inner	Outer
455846	47 PC	5094 1	5	20

20 PC IMPACT BIT SET

- 20 x #2 x 25 mm (1 in.)



Item No.	Description	EAN 69743345+	Inner	Outer
455820	20 PC	5090 3	24	48

10 PC IMPACT BIT SET

- 10 x #2 x 50 mm (2 in.)



Item No.	Description	EAN 69743345+	Inner	Outer
455810	10 PC	5088 0	24	48



42 PC IMPACT BIT SET CASE (M)

- 32 x #1 x 2, #2 x 8, #3 x 2
- 7 x #2 x 2
- 1 x #1, #2 x 2, #3
- 1 x T-15, T-20 x 2, T-25 x 2, T-30 x 2, T-40
- 1 x 5.5, 6.5 mm
- 1 x 3 x 2, 4 x 2, 5 mm
- 1 x #2
- 1 x 6, 8 mm
- 1 x 60 mm



Item No.	Description	EAN	Inner	Outer
455912	42 PC	69762270+	3569 6	10 20

37 PC IMPACT BIT SET CASE (M)

- 24 x #1 x 2, #2 x 6, #3 x 2
- 8 x #1, #2, #3
- 1 x T-15, T-20 x 2, T-25 x 2, T-30
- 1 x 5.5, 6.5 mm
- 1 x 3, 4, 5 mm
- 2 x #2
- 2 x #2
- 2 x 8, 10 mm



Item No.	Description	EAN	Inner	Outer
455918	37 PC	69762270+	3572 6	10 20

16 PC COMBINATION HEX SHANK DRILL BITS SET CASE (S)

- 8 x 2, 2.5, 3, 3.5, 4, 5, 6, 8 mm
- 4 x 4, 5, 6, 8 mm
- 4 x 4, 5, 6, 8 mm



Item No.	Description	EAN	Inner	Outer
455905	16 PC	69777135+	1397 1	10 20

37 PC IMPACT BIT SET CASE (M)

- 8 x #1, #2, #3
- 1 x T-20, T-25, T-30
- 1 x 5.5 mm
- 1 x #2
- 16 x #1, #2 x 6, #3
- 1 x #1, #2, #3
- 1 x T-20, T-25
- 1 x 4, 5, 6 mm
- 8 x 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5 mm



Item No.	Description	EAN	Inner	Outer
455919	37 PC	69762270+	3572 6	10 20

10 PC RECIPROCATING SAW BLADES SET CASE (L)



- 2 PC 150 mm (6 in.) x 6 TPI wood cutting – HCS
- 4PC 150 mm (6 in.) x 24 TPI metal cutting - Bi-metal
- 2 PC 225 mm (9 in.) x 14 TPI metal cutting - Bi-metal
- 2 PC 240 mm (9-1/2 in.) x 5 TPI wood cutting – HCS

Item No.	Description	EAN	Inner	Outer
436410	10 PC	69762270+	3564 1	6 12

45 PC HEX SHANK HSS DRILLS & IMPACT BITS SET CASE (XL)

- 16 x #1, #2 x 6, #3
- 1 x #1, #2, #3
- 1 x T-15, T-20, T-25, T-27, T-30
- 8 x #2 x 3
- 8 x T-15, T-20, T-25, T-30
- 8 x 5.5 mm
- 8 x #2 x 3
- 8 x T-20, T-25, T-30
- 8 x 4 mm, 5 mm
- 4 x 6, 8, 10, 12 mm
- 4 x 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0 mm

45 PC QUICK CHANGE DRIVING BITS SET CASE (M)

- 16 x #1, #2 x 2, #3
- 1 x #1, #2 x 2, #3
- 1 x T-15, T-20, T-25 x 2, T-30
- 1 x 5.5 mm, 6.5 mm
- 1 x 5 mm
- 24 x #1 x 2, #2 x 4, #3 x 2
- 1 x #1, #2 x 2, #3
- 1 x 4, 5.5 x 2, 6.5 mm
- 1 x T-10, T-15, T-20, T-25, T-30
- 1 x 3, 4, 5 mm



Item No.	Description	EAN	Inner	Outer
455931	45 PC	69777135+	1224 0	10 20

18 PC 16-51 MM BI-METAL HOLESAW SET FOR ELECTRICIANS CASE (XXL)

- 14 PC Bi-Metal Holesaws: 16 mm (5/8 in.) (x2), 20 mm (25/32 in.) (x2), 22 mm (7/8 in.) (x2), 25 mm (1 in.) (x2), 32 mm (1-1/4 in.) (x2), 40 mm (1-9/16 in.) (x2), 51 mm (2 in.) (x2)
- 2 PC Arbors with HSS Pilot Bits 14-30 mm HPP Arbor 32-152 mm HPP Arbor
- 2 PC HSS Pilot Bits (Additional) Hex Wrench
- Plastic Storage Case



Item No.	Description	EAN	Inner	Outer
440104	18 PC	69777135+	1849 5	1 4

14 PC 19-92 MM BI-METAL HOLESAW SET FOR PLUMBERS CASE (XXL)

- 10 PC Bi-Metal Holesaws: 19 mm (3/4 in.), 25 mm (1 in.) (x2), 32 mm (1-1/4 in.), 35 mm (1-3/8 in.), 40 mm (1-9/16 in.), 44 mm (1-3/4 in.), 51 mm (2 in.), 64 mm (2-1/2 in.), 92 mm (3-5/8 in.)
- 2 PC Arbors with HSS Pilot Bits 14-30 mm HPP Arbor 32-152 mm HPP Arbor
- 2 PC HSS Pilot Bits (Additional)
- Plastic Storage Case



Item No.	Description	EAN	Inner	Outer
440105	14 PC	69777135+	1850 1	1 4

15 PC 19-64 MM BI-METAL HOLESAW SET FOR GENERAL PURPOSE CASE (XXL)

- 11 PC Bi-Metal Holesaws: 19 mm (3/4 in.), 22 mm (7/8 in.), 25 mm (1 in.), 29 mm (1-1/8 in.), 35 mm (1-3/8 in.), 38 mm (1-1/2 in.), 44 mm (1-3/4 in.), 51 mm (2 in.), 54 mm (2-1/8 in.), 57 mm (2-1/4 in.), 64 mm (2-1/2 in.)
- 2 PC Arbors with HSS Pilot Bits 14-30 mm HPP Arbor 32-152 mm HPP Arbor
- 2 PC HSS Pilot Bits (Additional) Hex Wrench
- Plastic Storage Case




Item No.	Description	EAN	Inner	Outer
440103	15 PC	69777135+	1851 8	1 4



APPLICATION GUIDE											
	CONTINUOUS	SEGMENTED	TURBO		CONTINUOUS	SEGMENTED	TURBO		CONTINUOUS	SEGMENTED	TURBO
Ceramic Tiles	✓	✓	✓	Marble	✓	✓	✓	Granite	✓	✓	✓
Paver	✓			Concrete		✓	✓	Terrazzo	✓	✓	✓
Slate	✓	✓	✓	Cement	✓	✓	✓	Blue Stone			✓
PVC			✓	Clay Bricks		✓	✓	Aluminium			✓

X-RIM TURBO DIAMOND BLADE

PRO GRADE

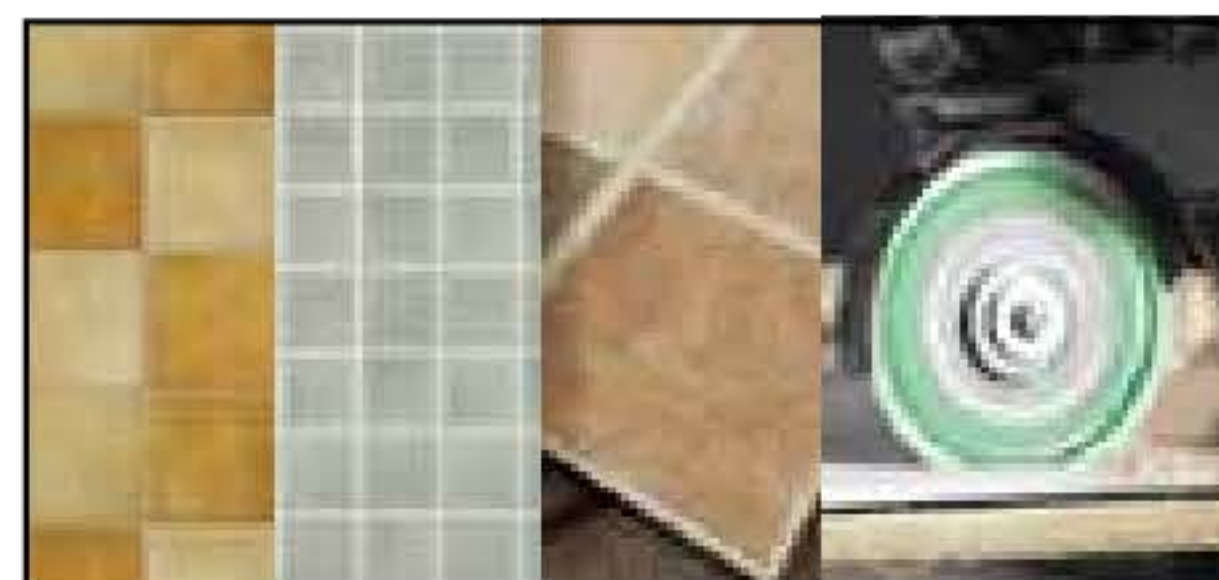

EN 13236 MPA DRY WET ø 22.23 mm 7/8 in.

- Hot press sintered, extremely smooth cutting finish on porcelain, marble, and ceramic tile
- Reduce chipping of tiles

Item No.	Outer Diameter	Bore Size	MPA	RPM	Tip Thickness	Diamond Height	EAN 69762270+	Inner	Outer
425171	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	-	14500	1.3 mm	10 mm	3334 0	12	36
425173	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	13200	1.3 mm	10 mm	3335 7	12	36
425175	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	12200	1.4 mm	10 mm	3336 4	12	36
425177	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	8500	1.8 mm	10 mm	3337 1	12	24
425179	200 mm (7-7/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	7600	1.8 mm	10 mm	3338 8	12	24
425181	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	6600	2.0 mm	10 mm	3339 5	12	24



DIAMOND BLADES-SEGMENTED

PRO GRADE



EN 13236 MPA DRY ø 22.23 mm 7/8 in.

- Hot pressed sintered for heavy duty and fast cutting
- For dry use
- Universal use on concrete, bricks, granite, sandstone, block and building materials

Item No.	Outer Diameter	Bore Size	MPA	RPM	Tip Thickness	Diamond Height	EAN 69426292+	Inner	Outer
425021	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	-	14500	1.9 mm	10 mm	2349 8	12	36
425023	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	13200	2 mm	10 mm	2350 4	12	36
425025	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	12200	2 mm	10 mm	2351 1	12	36
425029	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	8500	2.2 mm	10 mm	2352 8	12	24
425033	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	6600	2.4 mm	10 mm	2353 5	12	24



DIAMOND BLADES-CONTINUOUS

PRO GRADE



EN 13236 MPA WET ø 22.23 mm 7/8 in.

- Hot press sintered, fast cutting, wet use
- For tile and ceramics

Item No.	Outer Diameter	Bore Size	MPA	RPM	Tip Thickness	Diamond Height	EAN 69426292+	Inner	Outer
425151	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	-	14500	1.6 mm	7.5 mm	2376 4	12	36
425155	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	13200	1.6 mm	7.5 mm	2378 8	12	36
425157	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	12200	1.6 mm	7.5 mm	2379 5	12	36
425161	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	8500	2 mm	7.5 mm	2381 8	12	24
425165	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	6600	2 mm	7.5 mm	2383 2	12	24



DIAMOND BLADES-TURBO

PRO GRADE



EN 13236 MPA DRY WET ø 22.23 mm 7/8 in.

- Hot press sintered, fast cutting, dry and wet use
- Universal use on concrete, granite, brick, block and building materials

Item No.	Outer Diameter	Bore Size	MPA	RPM	Tip Thickness	Diamond Height	EAN 69426292+	Inner	Outer
425051	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	-	14500	2 mm	10 mm	2356 6	12	36
425053	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	13200	2.1 mm	10 mm	2357 3	12	36
425055	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	12200	2.1 mm	10 mm	2358 0	12	36
425059	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	8500	2.6 mm	10 mm	2360 3	12	24
425063	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	6600	2.8 mm	10 mm	2362 7	12	24



DIAMOND BLADES-TURBO

PRO GRADE



EN 13236 MPA DRY WET ø 22.23 mm 7/8 in.

- Hot press sintered, fast cutting, dry and wet use
- For granite, marble, very hard bricks, stone, mortar, and other hard building materials

Item No.	Outer Diameter	Bore Size	MPA	RPM	Tip Thickness	Diamond Height	EAN 69426292 (A) 69743345 (B)	Inner	Outer
425100	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	-	14500	2 mm	10 mm	B + 5006 4	12	36
425103	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	13200	2.1 mm	10 mm	A + 2367 2	12	36
425105	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	12200	2.1 mm	10 mm	A + 2368 9	12	36
425109	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	8500	2.6 mm	10 mm	A + 2370 2	12	24
425113	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	✓	6600	2.8 mm	10 mm	A + 2372 6	12	24



DIAMOND BLADES-SEGMENTED



EN 13236 DRY $\varnothing 22.23$ mm 7/8 in.

- Dry use
- For concrete, granite, brick, block and other building materials



Item No.	Outer Diameter	Bore Size	RPM	Tip Thickness	Diamond Height	EAN 69426292+	Inner	Outer
425521	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	14500	1.9 mm	7 mm	8910 4	12	36
425523	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	13200	1.9 mm	7 mm	3993 2	12	36
425525	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	12200	1.9 mm	7 mm	8911 1	12	36
425527	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	8500	2.4 mm	7 mm	3994 9	12	24
425531	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	6600	2.6 mm	7 mm	3995 6	12	24

DIAMOND BLADES-CONTINUOUS



EN 13236 WET $\varnothing 22.23$ mm 7/8 in.

- Wet use
- For ceramic and granite tile



Item No.	Outer Diameter	Bore Size	RPM	Tip Thickness	Diamond Height	EAN 69426292+	Inner	Outer
425501	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	14500	1.9 mm	5 mm	3992 5	12	36
425503	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	13200	1.9 mm	5 mm	4734 0	12	36
425505	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	12200	1.9 mm	5 mm	4735 7	12	36
425507	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	8500	2.4 mm	5 mm	8908 1	12	24
425509	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	6600	2.6 mm	5 mm	8909 8	12	24

DIAMOND BLADES-TURBO



EN 13236 DRY WET $\varnothing 22.23$ mm 7/8 in.

- Wet and dry use
- For granite, hard brick and hard stone



Item No.	Outer Diameter	Bore Size	RPM	Tip Thickness	Diamond Height	EAN 69426292+	Inner	Outer
425541	105 mm (4-1/8 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	14500	2.1 mm	7 mm	8912 8	12	36
425543	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	13200	2.1 mm	7 mm	3996 3	12	36
425545	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	12200	2.1 mm	7 mm	8913 5	12	36
425547	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	8500	2.6 mm	7 mm	8914 2	12	24
425549	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	6600	2.8 mm	7 mm	8915 9	12	24

3PC DIAMOND BLADES



DRY WET TURBO

EN 13236 $\varnothing 22.23$ mm 7/8 in.

- 1 pc turbo, 1 pc segmented, 1 pc continuous
- For general concrete material cutting



Item No.	Outer Diameter	Bore Size	RPM	EAN 69426292+	Inner	Outer
425573	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	13200	7009 6	12	48



MULTI-PURPOSE DIAMOND BLADE

PRO GRADE



- All purpose diamond edged cut off wheel
- Advanced diamond technology provides extreme cutting in wood, tubular metals, non-ferrous metals, masonry products, tiles and PVC
- High grade diamond rim to reduce dust residue and odors versus bonded abrasives
- Heat-resistant vacuum Brazed to deliver best-in-class performance and extreme blade life



Item No.	Outer Diameter	Bore Size	RPM	EAN 69743345+	Inner	Outer
425201	100 mm (4 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	14500	5479 6	12	36
425202	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	13200	5480 2	12	36
425203	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	12200	5481 9	12	36
425205	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	8500	5482 6	12	24
425206	230 mm (9 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	6600	5483 3	12	24



DIAMOND EDGE METAL CUTTING BLADE

PRO GRADE



- Diamond edge metal cutting blades boast an impressive 1000 cuts without replacement, with a wheel life of 40 times more compared to standard abrasive cut-off wheels
- Diamond edge blade uses diamond technology to provide extra long blade life
- Solid metal body with a heavy duty design for extra safety and less risk of blade breakage
- Less odor and dust resistance



Item No.	Outer Diameter	Bore Size	RPM	EAN 69777135+	Inner	Outer
425221	100 mm (4 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	14500	1566 1	12	36
425222	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	13200	1567 8	12	36
425223	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	12200	1568 5	12	36
425225	180 mm (7 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	8500	1569 2	12	24




GLASS/TILE DIAMOND CUTTING GRINDING DISC

PRO GRADE



- Multi functions for cutting, grinding, chamfering & raking with one blade for more efficiency
- Vacuum brazed hot press
- For Dry/Wet use. (recommend wet cutting for longer lifetime)
- Suitable for multiple materials granite, marble, glass, tiles, ceramic

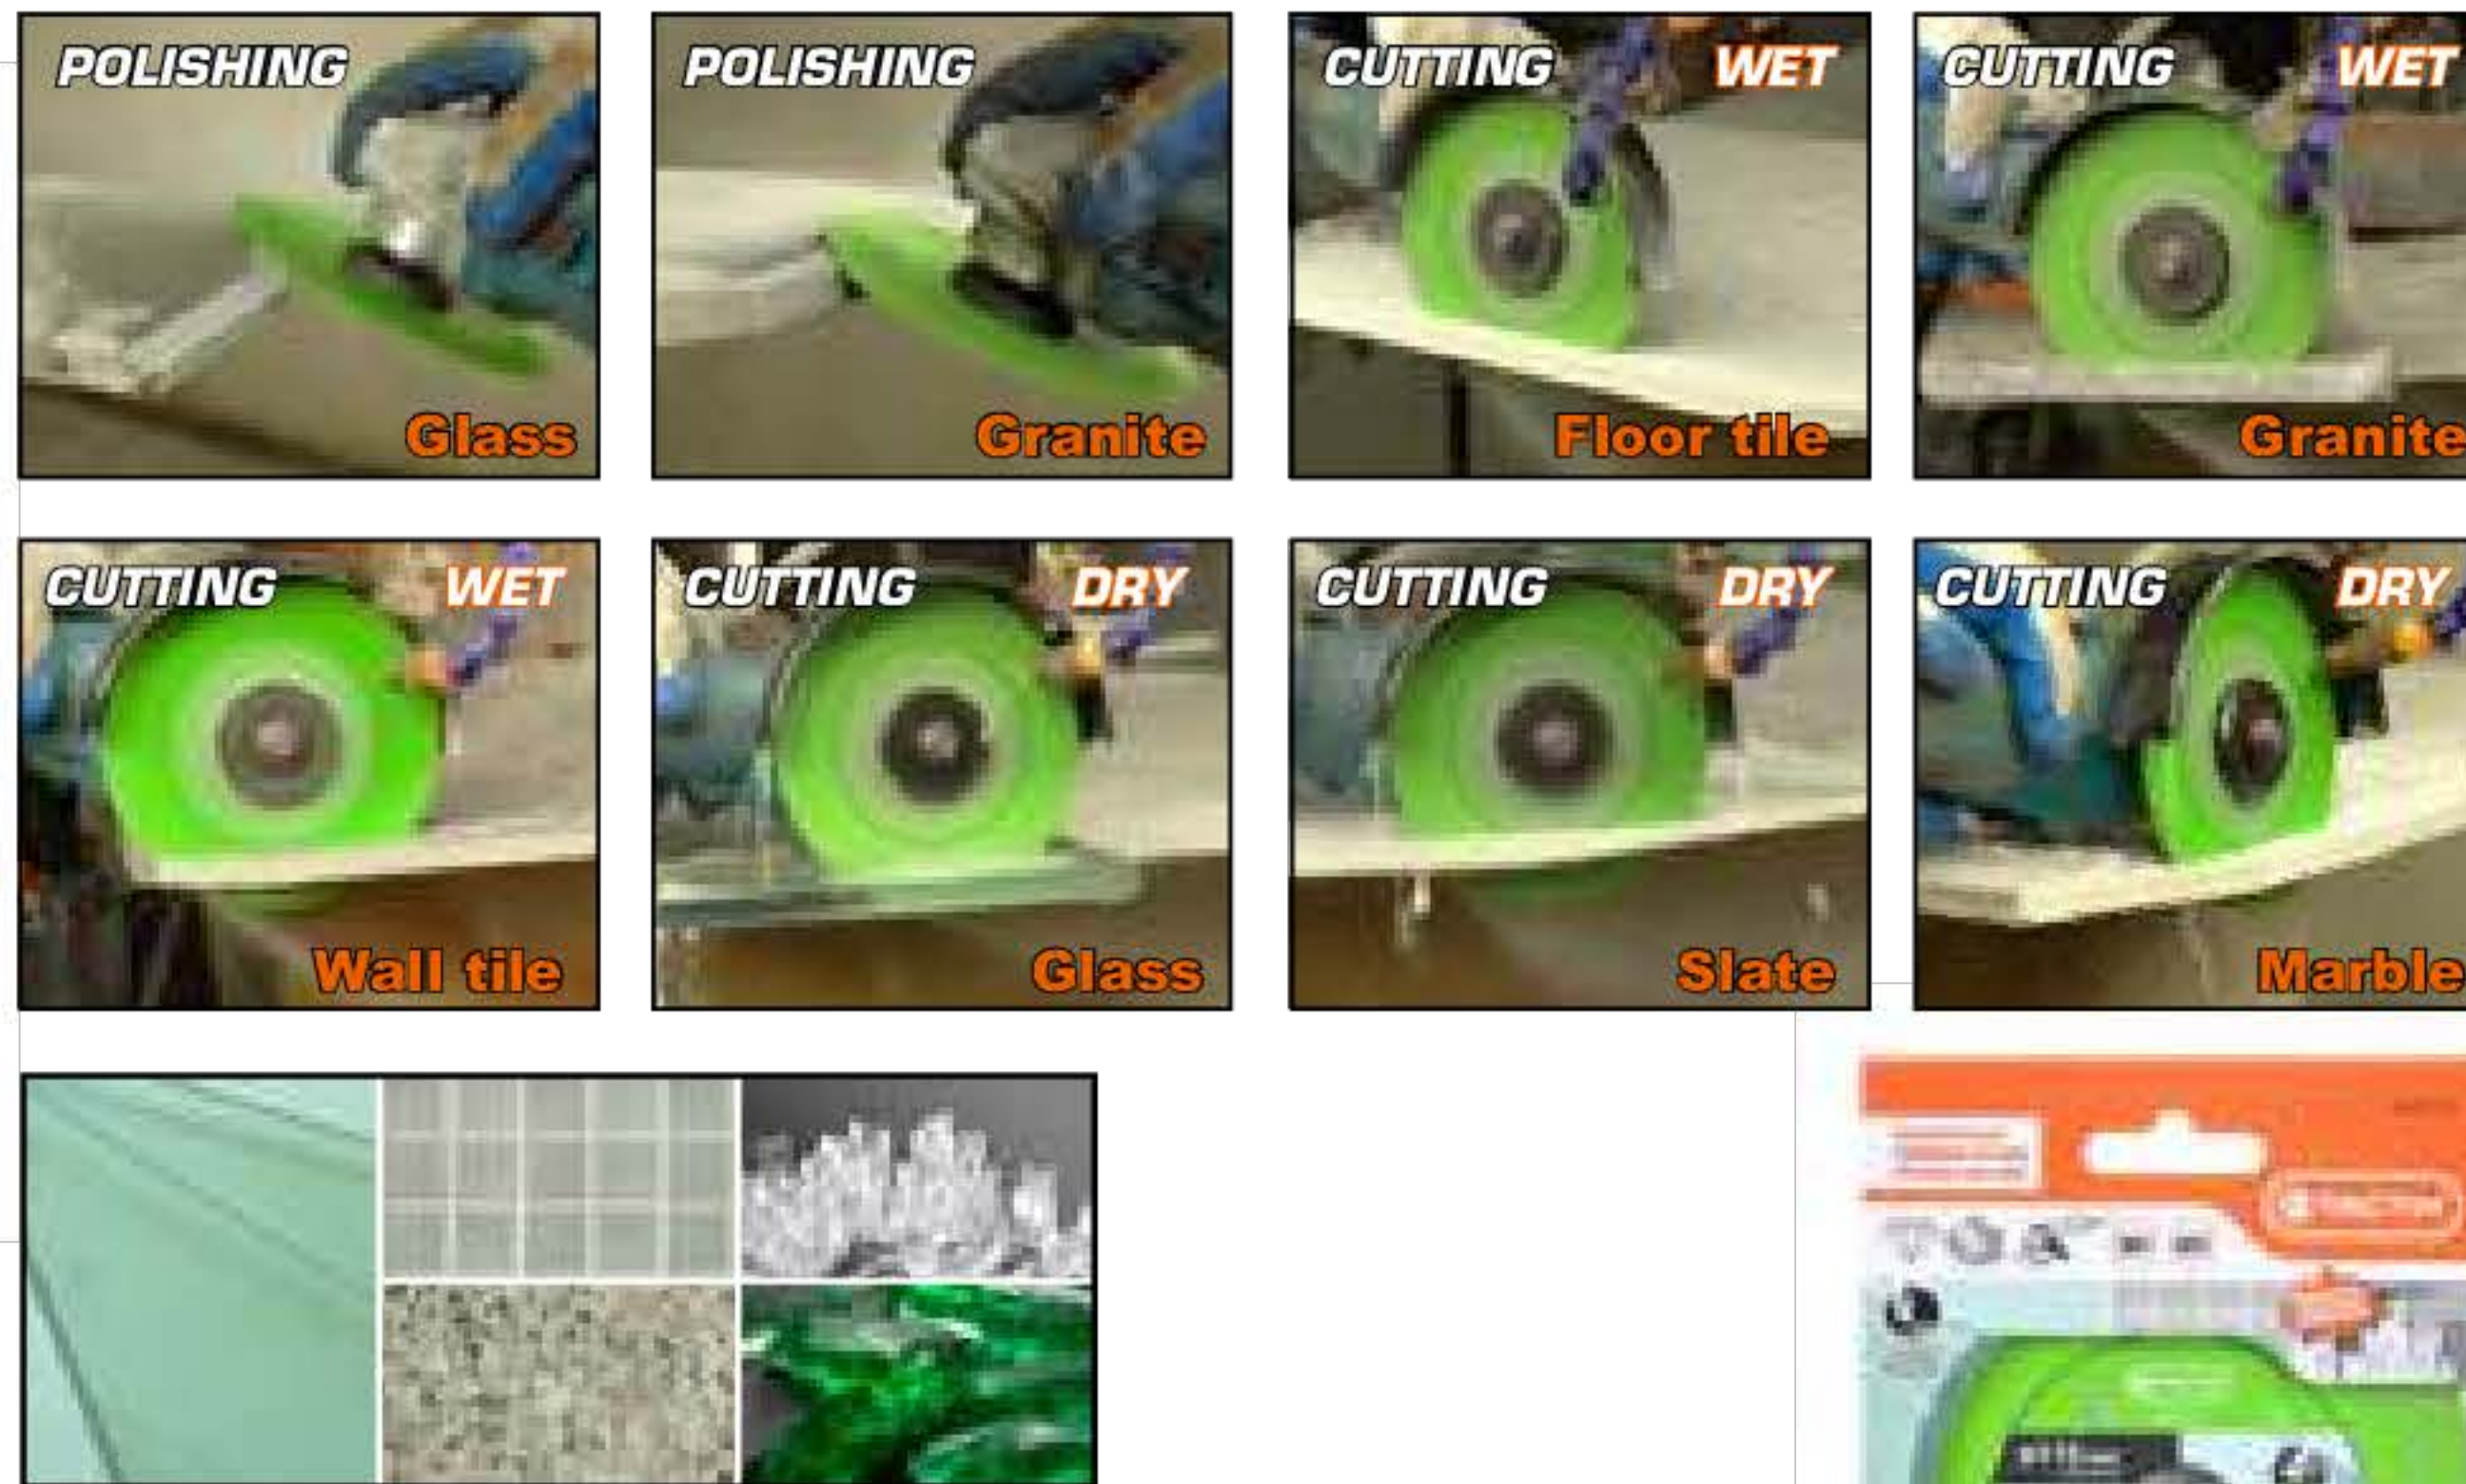


Item No.	Outer Diameter	Bore Size	RPM	EAN 69762270+	Inner	Outer
425211	100 mm (4 in.)	20-16 mm (3/4-5/8 in.)	14500	3776 8	12	36
425212	115 mm (4-1/2 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	13200	3777 5	12	36
425213	125 mm (5 in.)	22.23-20-16 mm (7/8-3/4-5/8 in.)	12200	3778 2	12	36

ELECTROPLATED DIAMOND CUTTING DISC WITH DOUBLE TRIANGLE SHAPE


PRO GRADE

- Electroplated diamond cutting and grinding discs for granite & marble, double sides coated
- This versatility diamond blade can cut a wide variety of materials (tile, stoneware, porcelain, marble, granite, natural stone, ceramic tile ...) and can be applicable in many situations in which it can be used (straight cut, mitre, inserts, finishes ...)
- Electroplated technology keeps all diamond grain attached to the steel core, high diamond exposure rate provide high efficient working performance
- M14 Flange Segmented for angle grinder

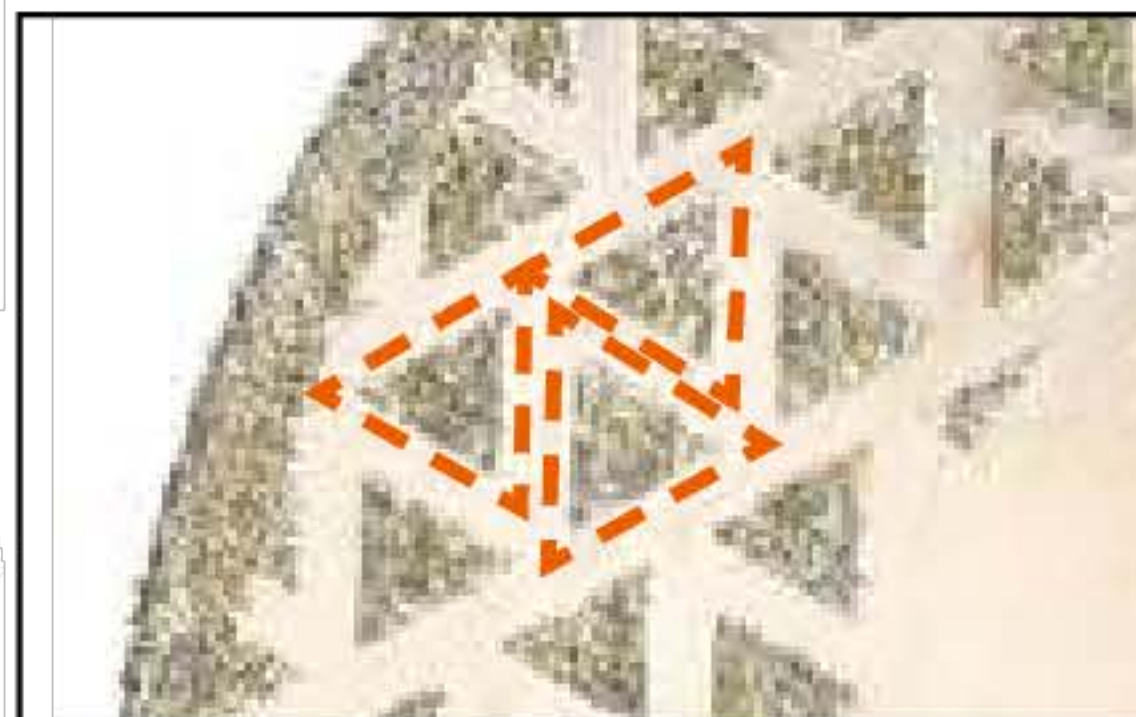

BOTH SIDES ARE COATED WITH TRIANGLE DIAMOND SPOTS

Provides high efficient cutting & grinding purpose

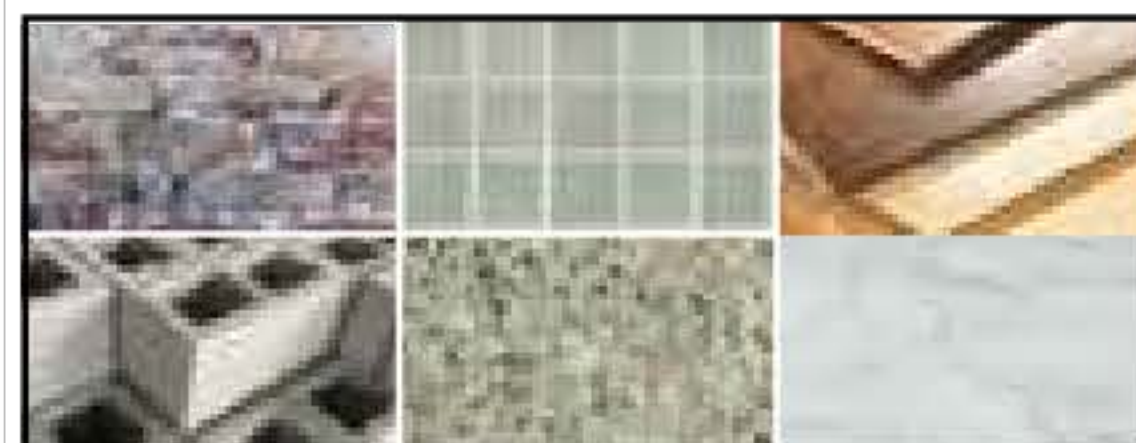

Item No.	Outer Diameter	Bore Size	RPM	EAN 69708346+	Inner	Outer
425603	115 mm (4-1/2 in.)	M14	13200	7757 7	12	36
425605	125 mm (5 in.)	M14	12200	7762 1	12	36
425607	180 mm (7 in.)	M14	8600	7832 1	12	24
425609	230 mm (9 in.)	M14	6500	7833 8	12	24



DIAMOND CUP SINGLE

- Large grinding segments with heat treated steel bodies which provides increases durability and wheel life
- Fast action on grinding granite, marble, tile, rock and concrete
- Smoothing concrete or field stone
- Suitable for grinding machines and angle grinders



Item No.	Size	RPM	EAN 69426292+	Inner	Outer
426001	115 x 22.23 mm (4-1/2 x 7/8 in.)	13300	0218 9	6	24
426003	125 x 22.23 mm (5 x 7/8 in.)	12200	0219 6	6	24

DIAMOND CUP DOUBLE

- Large grinding segments with heat treated steel bodies which provides increases durability and wheel life
- 2x faster action on grinding granite, marble, tile, rock and concrete
- Smoothing concrete or field stone
- Suitable for grinding machines and angle grinders




Item No.	Size	RPM	EAN 69426292+	Inner	Outer
426011	115 x 22.23 mm (4-1/2 x 7/8 in.)	13300	0220 2	6	24
426013	125 x 22.23 mm (5 x 7/8 in.)	12200	0221 9	6	24

DIAMOND CUP TURBO

- Supper turbo segmented diamond cups are designed for grinding concrete and field stone
- The turbo segment configuration allows for faster and soft material removal
- Surface finishing on concrete, screed and natural stone can also be used for removal of glues and epoxies
- Brazed wave row segments for fast and smooth grinding with 5 mm segment height use wet or dry
- Suitable for grinding machines and angle grinders



Item No.	Size	RPM	EAN 69426292+	Inner	Outer
426021	115 x 22.23 mm (4-1/2 x 7/8 in.)	13300	0491 6	6	24
426023	125 x 22.23 mm (5 x 7/8 in.)	12200	0492 3	6	24

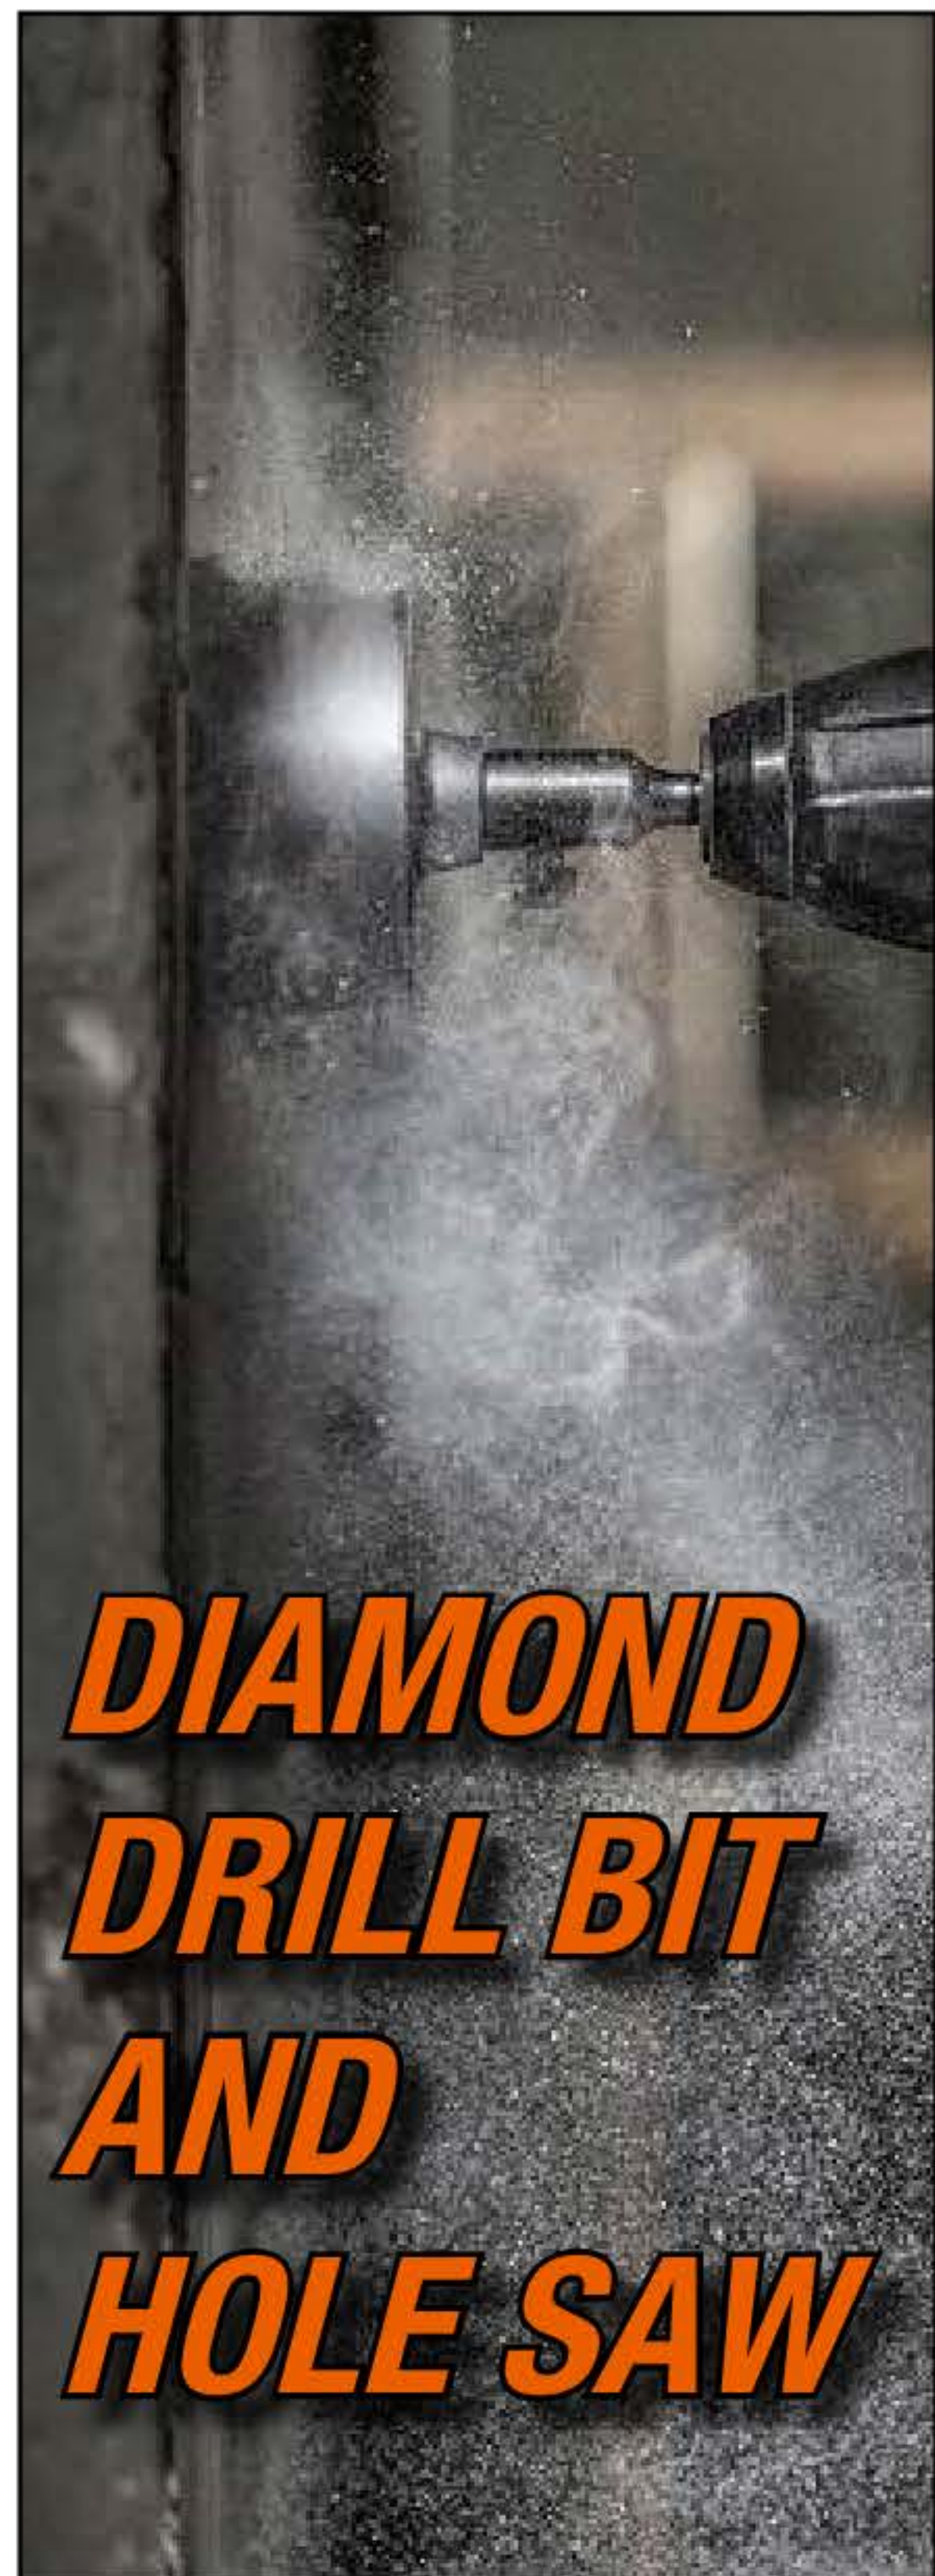

DIAMOND COATED HOLE SAW



- High quality industrial diamond
- Ø 19 to 35 mm for wallplug holes, water pipes, waste pipes and Ø 38 to 100 mm for waste pipes, electrical boxes and sockets, for porcelain, granite worktops, tiles, quarry tiles, ceramics, natural stone slabs, marble.
- Attention: Only usable with water cooling

VACUUM BRAZED DIAMOND DRILL BIT

- 1/4 in. Hex shank for power drills
- Suitable for high drilling speed, industry diamonds, long using life
- Filled with cutting gel, no additional cooling necessary, no time-consuming preparation
- For tiles, ceramics, stone ware, gneiss, granite, marble and slate
- DRY and WET drilling



Item No.	Cutting DIA.	Cutting Depth	Shank	EAN 69743345+	Inner	Outer
425301	5 mm (3/16 in.)	32 mm (1-1/4 in.)	6.35 mm (1/4 in.)	5484 0	10	60
425303	6 mm (1/4 in.)	40 mm (1-9/16 in.)	6.35 mm (1/4 in.)	5485 7	10	60
425305	8 mm (5/16 in.)	40 mm (1-9/16 in.)	6.35 mm (1/4 in.)	5486 4	10	60
425307	10 mm (3/8 in.)	40 mm (1-9/16 in.)	6.35 mm (1/4 in.)	5487 1	10	60
425309	12 mm (1/2 in.)	40 mm (1-9/16 in.)	6.35 mm (1/4 in.)	5488 8	10	60
425311	14 mm (9/16 in.)	40 mm (1-9/16 in.)	6.35 mm (1/4 in.)	5489 5	10	60

VACUUM BRAZED DIAMOND HOLE SAW

- M14 x2 thread for angle grinders
- Suitable for high drilling speed, industry diamonds, long using life
- Filled with cutting gel, no additional cooling necessary, no time-consuming preparation
- For tiles, ceramics, stone ware, gneiss, granite, marble and slate
- DRY and WET drilling



Item No.	Cutting DIA.	Cutting Depth	Shank	EAN 69743345+	Inner	Outer
425321	6 mm (1/4 in.)	35 mm (1-3/8 in.)	M14	5491 8	12	48
425323	8 mm (5/16 in.)	35 mm (1-3/8 in.)	M14	5492 5	12	48
425325	10 mm (3/8 in.)	35 mm (1-3/8 in.)	M14	5493 2	12	48
425327	12 mm (1/2 in.)	35 mm (1-3/8 in.)	M14	5494 9	12	48
425329	14 mm (9/16 in.)	35 mm (1-3/8 in.)	M14	5495 6	12	48
425331	20 mm (13/16 in.)	45 mm (1-3/4 in.)	M14	5496 3	6	36
425333	25 mm (1 in.)	45 mm (1-3/4 in.)	M14	5497 0	6	36
425335	30 mm (1-3/16 in.)	45 mm (1-3/4 in.)	M14	5498 7	6	36
425337	35 mm (1-3/8 in.)	45 mm (1-3/4 in.)	M14	5499 4	6	36
425339	38 mm (1-1/2 in.)	45 mm (1-3/4 in.)	M14	5500 7	6	36



Item No.	Cutting DIA.	Cutting Depth	EAN 69743345+	Inner	Outer
425360	19 mm (3/4 in.)	38 mm (1-1/2 in.)	5432 1	12	48
425362	22 mm (7/8 in.)	38 mm (1-1/2 in.)	5433 8	12	48
425364	25 mm (1 in.)	38 mm (1-1/2 in.)	5434 5	12	48
425366	29 mm (1-1/8 in.)	38 mm (1-1/2 in.)	5435 2	12	48
425368	32 mm (1-1/4 in.)	38 mm (1-1/2 in.)	5436 9	12	48
425370	35 mm (1-3/8 in.)	38 mm (1-1/2 in.)	5437 6	12	48
425372	38 mm (1-1/2 in.)	38 mm (1-1/2 in.)	5438 3	12	48
425374	44 mm (1-3/4 in.)	38 mm (1-1/2 in.)	5439 0	12	48
425376	50 mm (2 in.)	38 mm (1-1/2 in.)	5440 6	6	36
425378	54 mm (2-1/8 in.)	38 mm (1-1/2 in.)	5441 3	6	36
425380	64 mm (2-1/2 in.)	38 mm (1-1/2 in.)	5442 0	6	36
425382	67 mm (2-5/8 in.)	38 mm (1-1/2 in.)	5443 7	6	36
425384	76 mm (3 in.)	38 mm (1-1/2 in.)	5444 4	6	36
425386	82 mm (3-1/4 in.)	38 mm (1-1/2 in.)	5445 1	6	36
425388	89 mm (3-1/2 in.)	38 mm (1-1/2 in.)	5446 8	6	36
425390	100 mm (4 in.)	38 mm (1-1/2 in.)	5447 5	6	36



9 PC DIAMOND COATED HOLE SAW SET


- 19, 22, 29, 38, 51, 57 mm
- 1 pc arbor 1/2 in.-20 UNF
- 1 pc adapter
- 1 pc masonry pilot drill bit



Item No.	Size	EAN 69743345+	Inner	Outer
425392	19, 22, 29, 38, 51, 57 mm	5450 5	6	24

DRILLING GUIDE FOR DIAMOND HOLE SAWS


- For hole saws 4 to 83 mm accurately positioning.
- Two knobs to lock slider, one lever to engage suction

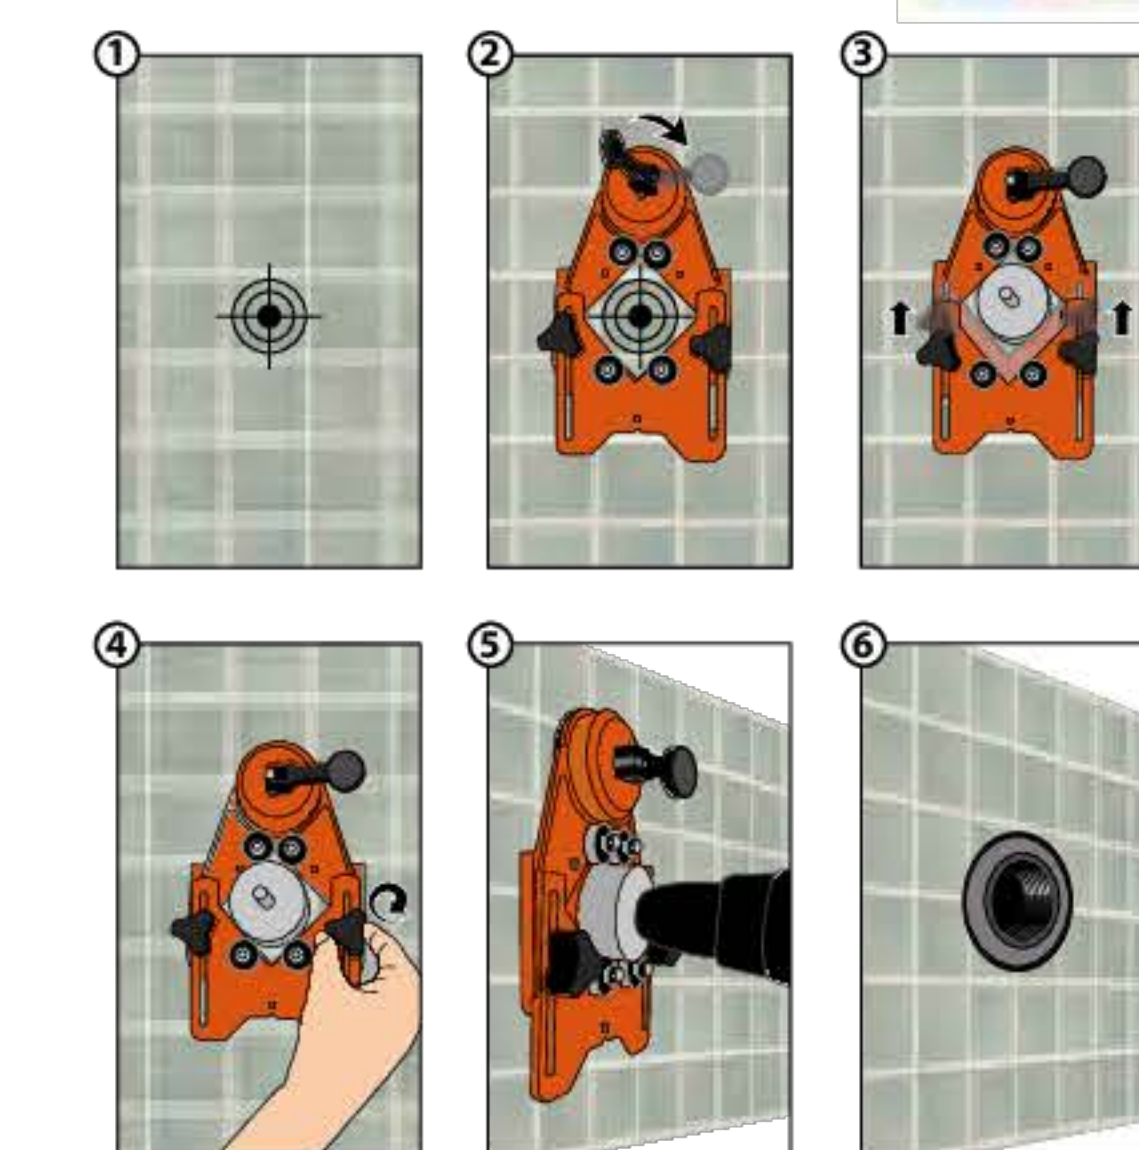

Item No.	Size	EAN 69743345+	Inner	Outer
425394	4-83 mm	5451 2	6	24

WATERING-CAN FOR DIAMOND HOLE SAWS

- For cooling down diamond hole saws through drilling process
- Water capacity: 1 litre
- Water hose included

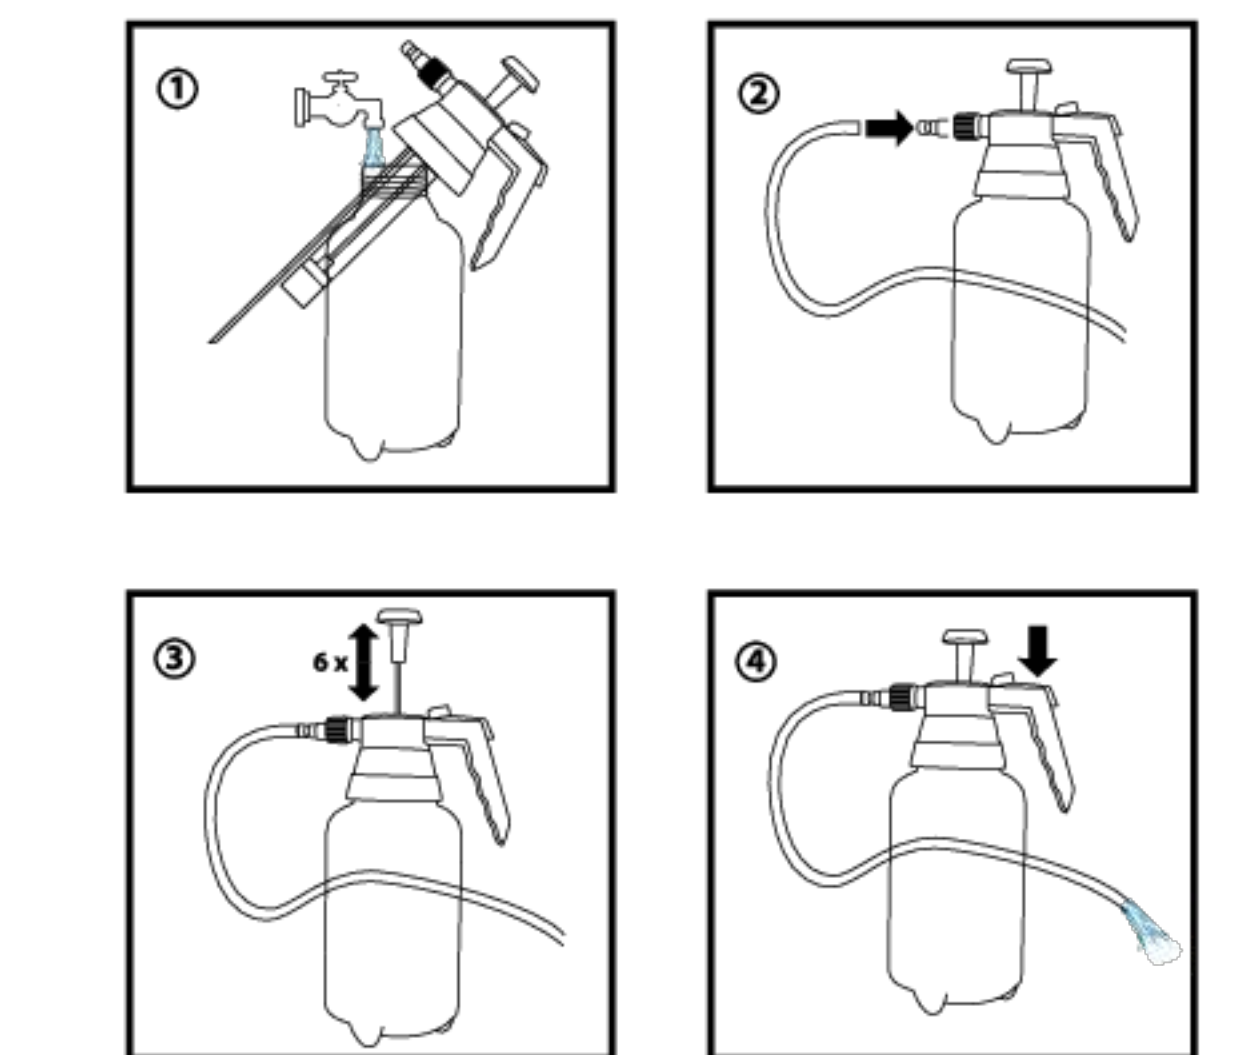

Item No.	Size	EAN 69743345+	Inner	Outer
425396	1 Litre	5452 9	0	8

ARBOR FOR DIAMOND COATED HOLE SAW

- Tungsten carbide pilot drill bit



Item No.	For hole saw size	EAN 69743345+	Inner	Outer
425398	19-29 mm (3/4 in.-1-1/8 in.)	5448 2	10	60

ARBOR FOR DIAMOND COATED HOLE SAW

- Tungsten carbide pilot drill bit



Item No.	For hole saw size	EAN 69743345+	Inner	Outer
425399	32-152 mm (1-1/4 in.-6 in.)	5449 9	10	60



Special Saw Blade design

- engineered with carbide tips, and the design helps to provide precise, smooth cutting performance

Thinner kerf

- provides faster cuts and less waste

Tungsten Carbide blade tips

- a micrograin formulation for increasing impact damage resistance

Hard steel blade body

- delivers accuracy and resists bending and deflection for true cuts

CIRCULAR SAW BLADES

- WOOD
- ALUMINUM
- METAL
- FIBRE CEMENT

ALUMINUM CIRCULAR SAW BLADE



- K30 TCG Caride teeth provides longer life and faster cutting speed.
- Suitable for aluminum cutting applications.



Item No.	Outer Diameter	Kerf (mm)	Blade Thickness (mm)	Arbor (mm)	Teeth Quantity	Tungsten Carbide Tip	Tooth Grind	Hook Angle	Model	Max RPM	EAN 69743345+	Inner	Outer
435501	165 mm (6-1/2 in.)	2.2	1.4	20	54	K30 (YG8)	TCG	-5°	Circular Saw	8000	5831 2	12	36
435503	185 mm (7-1/4 in.)	2.4	1.8	20	60	K30 (YG8)	TCG	-5°	Circular Saw&Miter Saw	7000	5832 9	12	36
435505	216 mm (8-1/2 in.)	2.5	1.8	30	48	K30 (YG8)	TCG	-4°	Miter Saw&Table Saw	6000	5833 6	12	36
435509	254 mm (10 in.)	2.4	1.8	30	80	K30 (YG8)	TCG	-4°	Miter Saw&Table Saw	5000	5835 0	12	24
435513	254 mm (10 in.)	2.8	2.0	25.4	100	K30 (YG8)	TCG	8°	Miter Saw&Table Saw	5000	5837 4	12	24
435515	254 mm (10 in.)	2.8	2.0	25.4	120	K30 (YG8)	TCG	0°	Miter Saw&Table Saw	5000	5838 1	12	24
435523	305 mm (12 in.)	3.2	2.2	30	100	K30 (YG8)	TCG	-5°	Miter Saw&Table Saw	4500	5842 8	6	12



METAL CIRCULAR SAW BLADE



- P30 TCG Caride teeth provides longer life and faster cutting speed.
- Suitable for cutting various types of metal products including steel siding, roofing and steel studs.
- Laser cut blade for anti-kickback during cutting.



Item No.	Outer Diameter	Kerf (mm)	Blade Thickness (mm)	Arbor (mm)	Teeth Quantity	Tungsten Carbide Tip	Tooth Grind	Hook Angle	Model	Max RPM	EAN 69743345+	Inner	Outer
435601	136 mm (5-3/8 in.)	1.5	1.2	20	30	P30	TCG	0°	Circular Saw	4500	5845 9	12	36
435603	150 mm (6 in.)	2.0	1.6	20	32	P30	TCG	0°	Circular Saw	4000	5846 6	12	36
435605	185 mm (7-1/4 in.)	2.0	1.6	20	48	P30	TCG	0°	Circular Saw&Miter Saw	3500	5847 3	12	36
435607	254 mm (10 in.)	2.0	1.6	30	50	P30	TCG	0°	Miter Saw	2500	5848 0	12	24
435609	305 mm (12 in.)	2.2	1.8	30	60	P30	TCG	0°	Miter Saw	2000	5849 7	6	12



FIBRE CEMENT CIRCULAR SAW BLADE



- Poly Crystalline Diamond (PCD) teeth provides longer life when cutting fibre cement sheeting of all densities.
- Stabiliser slots for reduced vibration while cutting.



Item No.	Outer Diameter	Kerf (mm)	Blade Thickness (mm)	Arbor (mm)	Teeth Quantity	Tungsten Carbide Tip	Tooth Grind	Hook Angle	Model	Max RPM	EAN 69743345+	Inner	Outer
435701	165 mm (6-1/2 in.)	1.8	1.2	20	4	PCD DIAMOND	FLAT	10°	Circular Saw	8000	5850 3	12	36
435703	185 mm (7-1/4 in.)	1.8	1.2	20	4	PCD DIAMOND	FLAT	10°	Circular Saw&Miter Saw	7000	5851 0	12	36
435705	254 mm (10 in.)	2.0	1.4	30	6	PCD DIAMOND	FLAT	10°	Miter Saw&Table Saw	5000	5852 7	12	24
435707	305 mm (12 in.)	2.2	1.6	25.4	8	PCD DIAMOND	FLAT	10°	Miter Saw&Table Saw	4500	5853 4	6	12



CIRCULAR SAW BLADES

- K30 ATB Caride teeth provides longer life and faster cutting speed.
- Suitable for all kinds of wood: Hardwoods, Softwoods, MDF, Plywood, Chipboard, etc.



Item No.	Outer Diameter	Kerf (mm)	Blade Thickness (mm)	Arbor (mm)	Teeth Quantity	Tungsten Carbide Tip	Tooth Grind	Hook Angle	Model	Max RPM	EAN 69426292 (A) 69743345 (B)	Inner	Outer
434368	115 mm (4-1/2 in.)	2.2	1.1	22.23	48	K30 (YG8)	ATB	15-18°	Circular Saw	13200	B + 5334 8	12	36
434424	160 mm (6-1/4 in.)	2.2	1.4	20	24	K30 (YG8)	ATB	15-18°	Circular Saw	9000	A + 5589 5	12	36
434431	165 mm (6-1/2 in.)	2.2	1.4	20	24	K30 (YG8)	ATB	15-18°	Circular Saw	9000	A + 7262 5	12	36
435019	180 mm (7 in.)	2.4	1.4	20	24	K30 (YG8)	ATB	15-18°	Circular Saw	8000	A + 2651 2	12	36
435022	180 mm (7 in.)	2.4	1.4	20	40	K30 (YG8)	ATB	15-18°	Circular Saw	8000	A + 2652 9	12	36
434624	185 mm (7-1/4 in.)	2.2	1.4	20	24	K30 (YG8)	ATB	15-18°	Circular Saw&Miter Saw	8000	A + 5590 1	12	36
434636	185 mm (7-1/4 in.)	2.2	1.4	20	36	K30 (YG8)	ATB	15-18°	Circular Saw&Miter Saw	8000	A + 5591 8	12	36
434637	185 mm (7-1/4 in.)	2.2	1.4	20	40	K30 (YG8)	ATB	15-18°	Circular Saw&Miter Saw	8000	A + 8396 6	12	36
434646	185 mm (7-1/4 in.)	2.2	1.4	25.4	60	K30 (YG8)	ATB	15-18°	Circular Saw&Miter Saw	8000	A + 7194 9	12	36
434736	210 mm (8-1/4 in.)	2.2	1.4	30	36	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	7000	A + 5593 2	12	36
434848	216 mm (8-1/2 in.)	2.2	1.5	30	48	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	7000	A + 5596 3	12	36
434860	216 mm (8-1/2 in.)	2.2	1.5	30	60	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	7000	A + 5597 0	12	36
435023	230 mm (9 in.)	2.6	1.6	30	40	K30 (YG8)	ATB	15-18°	Circular Saw&Miter Saw	6000	A + 2653 6	12	24
435025	230 mm (9 in.)	2.6	1.6	30	60	K30 (YG8)	ATB	15-18°	Circular Saw&Miter Saw	6000	A + 2654 3	12	24
435026	250 mm (9-7/8 in.)	2.8	1.8	30	40	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	5500	A + 2655 0	12	24
435060	250 mm (9-7/8 in.)	2.8	1.8	30	60	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	5500	A + 2656 7	12	24
434936	254 mm (10 in.)	2.6	1.8	30	36	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	5500	A + 5598 7	12	24
434948	254 mm (10 in.)	2.6	1.8	30	48	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	5500	A + 5599 4	12	24
434960	254 mm (10 in.)	2.6	1.8	30	60	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	5500	A + 5600 7	12	24
434980	254 mm (10 in.)	2.6	1.8	30	80	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	5500	A + 5601 4	12	24
435068	300 mm (11-3/4 in.)	3.0	2.0	30	40	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	4500	A + 2657 4	6	12
435078	300 mm (11-3/4 in.)	3.0	2.0	30	60	K30 (YG8)	ATB	15-18°	Miter Saw&Table Saw	4500	A + 2658 1	6	12
435160	315 mm (12-3/8 in.)	3.0	2.0	30	60	K30 (YG8)	ATB	15-18°	Table Saw	4000	A + 5603 8	6	12
435180	315 mm (12-3/8 in.)	3.0	2.0	30	80	K30 (YG8)	ATB	15-18°	Table Saw	4000	A + 5604 5	6	12
435248	400 mm (15-3/4 in.)	3.2	2.2	30	48	K30 (YG8)	ATB	15-18°	Table Saw	3500	A + 5605 2	6	12
435260	400 mm (15-3/4 in.)	3.2	2.2	30	60	K30 (YG8)	ATB	15-18°	Table Saw	3500	A + 5606 9	6	12

CUT OFF WHEELS-INOX



- For cutting all types of metal and stainless steel




Item No.	Size	Material	RPM	EAN 69426292+	Inner	Outer
445131	100 x 1.2 x 16 mm (4 x 0.045 x 5/8 in.)	WA60 RBF	15300	2354 2	100	400
445132	100 x 1.6 x 16 mm (4 x 1/16 x 5/8 in.)	WA46 RBF	15300	8918 0	100	400
445135	115 x 1.6 x 22.23 mm (4-1/2 x 1/16 x 7/8 in.)	WA46 RBF	13200	8424 6	50	200
445136	115 x 1.0 x 22.23 mm (4-1/2 x 1/32 x 7/8 in.)	WA60 RBF	13200	8425 3	50	200
445137	115 x 3.0 x 22.23 mm (4-1/2 x 1/8 x 7/8 in.)	WA30 RBF	13200	8919 7	25	200
445139	125 x 1.6 x 22.23 mm (5 x 1/16 x 7/8 in.)	WA46 RBF	12200	8920 3	50	200
445140	125 x 1.0 x 22.23 mm (5 x 1/32 x 7/8 in.)	WA60 RBF	12200	8426 0	50	200
445141	125 x 3.0 x 22.23 mm (5 x 1/8 x 7/8 in.)	WA30 RBF	12200	8427 7	25	200
445151	180 x 1.6 x 22.23 mm (7 x 1/16 x 7/8 in.)	WA46 RBF	8600	8921 0	50	200
445152	180 x 3.0 x 22.23 mm (7 x 1/8 x 7/8 in.)	WA30 RBF	8600	8922 7	25	100
445161	230 x 1.6 x 22.23 mm (9 x 1/16 x 7/8 in.)	WA46 RBF	6500	8428 4	50	100
445162	230 x 3.0 x 22.23 mm (9 x 1/8 x 7/8 in.)	WA30 RBF	6500	8923 4	25	100

GRINDING WHEELS-INOX



- For general applications in metal and stainless steel

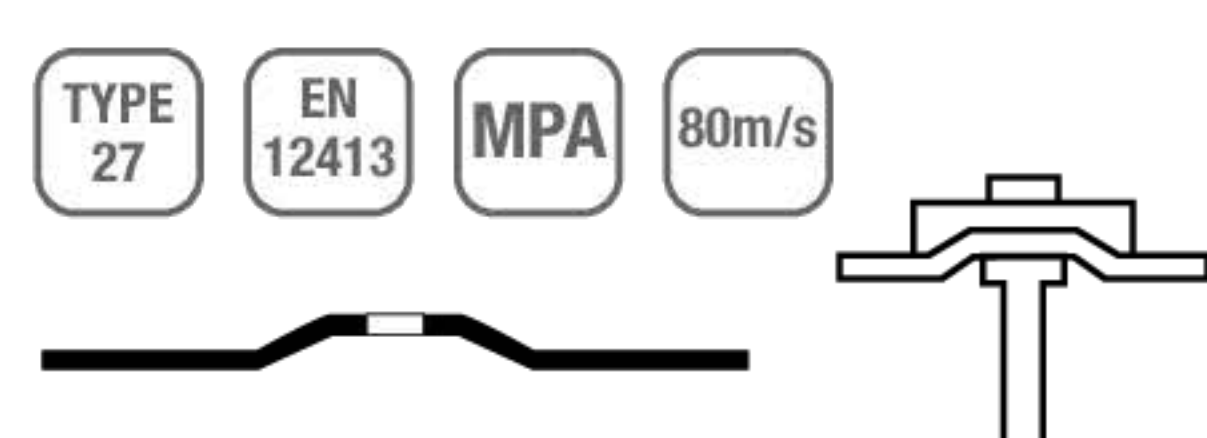

Item No.	Size	Material	RPM	EAN 69426292+	Inner	Outer
445181	100 x 6 x 16 mm (4 x 1/4 x 5/8 in.)	WA24 RBF 15300	8924 1	25	200	
445183	115 x 6 x 22.23 mm (4-1/2 x 1/4 x 7/8 in.)	WA24 RBF 13200	8925 8	25	100	
445185	125 x 6 x 22.23 mm (5 x 1/4 x 7/8 in.)	WA24 RBF 12200	8926 5	25	100	
445187	180 x 6 x 22.23 mm (7 x 1/4 x 7/8 in.)	WA24 RBF 8600	8927 2	25	50	
445189	230 x 6 x 22.23 mm (9 x 1/4 x 7/8 in.)	WA24 RBF 6500	8928 9	25	50	

CUT OFF WHEELS-METAL



- For cutting all types of metal




Item No.	Size	Material	RPM	EAN 69426292(A) 69708346(B)	Inner	Outer
445050	75 x 1.6 x 10 mm (3 x 1/16 x 3/8 in.)	A46SBF	20100	A + 6971 7	100	1000
445055	100 x 2.5 x 16 mm (4 x 3/32 x 5/8 in.)	A36RBF	15300	A + 2557 7	50	200
445057	115 x 3 x 22.23 mm (4-1/2 x 1/8 x 7/8 in.)	A30RBF	13200	A + 2558 4	50	200
445059	115 x 1 x 22.23 mm (4-1/2 x 1/32 x 7/8 in.)	A60RBF	13200	A + 2559 1	50	200
445063	125 x 3 x 22.23 mm (5 x 1/8 x 7/8 in.)	A30RBF	12200	A + 2561 4	25	200
445065	125 x 1 x 22.23 mm (5 x 1/32 x 7/8 in.)	A60RBF	12200	A + 2562 1	50	200
445071	180 x 3 x 22.23 mm (7 x 1/8 x 7/8 in.)	A30RBF	8600	A + 2565 2	25	100
445072	180 x 1.2 x 22.23 mm (7 x 3/64 x 7/8 in.)	A46RBF	8600	B + 7699 0	25	200
445073	180 x 1.6 x 22.23 mm (7 x 1/16 x 7/8 in.)	A46RBF	8600	A + 2566 9	25	200
445075	230 x 3 x 22.23 mm (9 x 1/8 x 7/8 in.)	A30RBF	6500	A + 2567 6	0	25
445076	230 x 1.6 x 22.23 mm (9 x 1/16 x 7/8 in.)	A46RBF	6500	A + 5478 2	50	100
445085	355 x 3 x 25.4 mm (14 x 1/8 x 1 in.)	A30RBF	4400	A + 2572 0	0	25
445086	355 x 2.8 x 25.4 mm (14 x 1/8 x 1 in.)	A30RBF	4400	B + 7691 4	0	25

GRINDING WHEELS-METAL



- For weld grinding and surface conditioning with metal

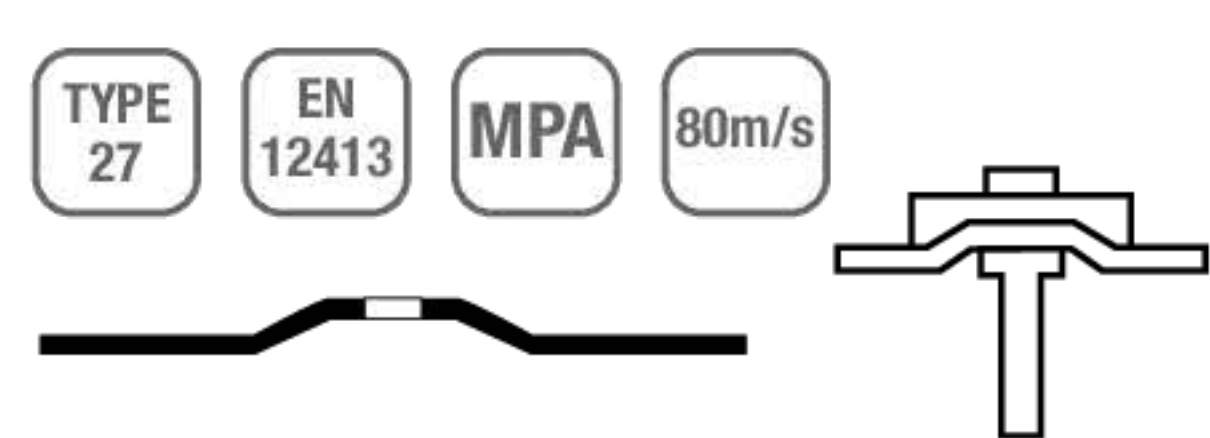

Item No.	Size	Material	RPM	EAN 69426292+	Inner	Outer
445001	100 x 6 x 16 mm (4 x 1/4 x 5/8 in.)	A24RBF	15300	2541 6	25	100
445003	115 x 6 x 22.23 mm (4-1/2 x 1/4 x 7/8 in.)	A24RBF	13200	2542 3	10	100
445005	125 x 6 x 22.23 mm (5 x 1/4 x 7/8 in.)	A24RBF	12200	2543 0	10	100
445009	180 x 6 x 22.23 mm (7 x 1/4 x 7/8 in.)	A24RBF	8600	2545 4	10	50
445011	230 x 6 x 22.23 mm (9 x 1/4 x 7/8 in.)	A24RBF	6500	2546 1	10	20

CUT OFF WHEELS-STONE



- For general applications in concrete, stone and masonry




Item No.	Size	Material	RPM	EAN 69426292+	Inner	Outer
445103	115 x 3 x 22.23 mm (4-1/2 x 1/8 x 7/8 in.)	C30RBF	13200	2575 1	50	200
445105	125 x 3 x 22.23 mm (5 x 1/8 x 7/8 in.)	C30RBF	12200	2576 8	25	200
445109	180 x 3 x 22.23 mm (7 x 1/8 x 7/8 in.)	C30RBF	8600	2578 2	25	100
445111	230 x 3 x 22.23 mm (9 x 1/8 x 7/8 in.)	C30RBF	6500	2579 9	25	50



GRINDING WHEELS-STONE



- For general applications in concrete, stone and masonry

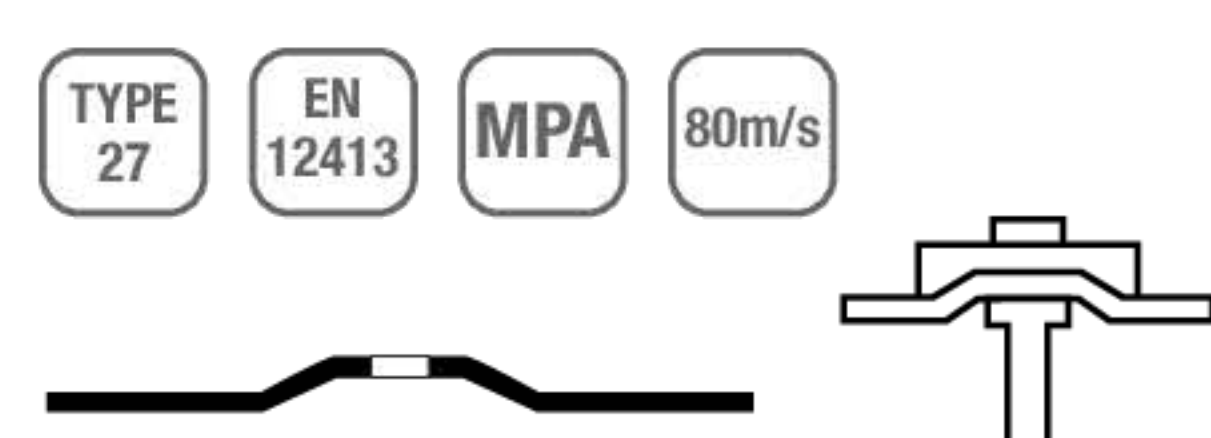

Item No.	Size	Material	RPM	EAN 69426292+	Inner	Outer
445015	115 x 6 x 22.23 mm (4-1/2 x 1/4 x 7/8 in.)	C24RBF	13200	2548 5	10	100
445017	125 x 6 x 22.23 mm (5 x 1/4 x 7/8 in.)	C24RBF	12200	2549 2	10	100
445021	180 x 6 x 22.23 mm (7 x 1/4 x 7/8 in.)	C24RBF	8600	2551 5	10	50
445025	230 x 6 x 22.23 mm (9 x 1/4 x 7/8 in.)	C24RBF	6500	2553 9	10	20

MULTI-PURPOSE CUT OFF WHEEL



- For cutting metal, aluminum alloy, steel, inox, masonry, pvc



Item No.	Size	Material	RPM	EAN 69743345+	Inner	Outer
445201	100 x 1 x 16 mm (4 x 1/32 x 5/8 in.)	WA60 TBF 15300	5507 6	100	400	
445203	115 x 1 x 22.23 mm (4-1/2 x 1/32 x 7/8 in.)	WA60 TBF 13200	5508 3	50	200	
445205	125 x 1 x 22.23 mm (5 x 1/32 x 7/8 in.)	WA60 TBF 12200	5509 0	50	200	
445207	180 x 1.6 x 22.23 mm (7 x 1/16 x 7/8 in.)	WA46 TBF 8600	5510 6	25	200	
445209	230 x 3 x 22.23 mm (9 x 1/8 x 7/8 in.)	WA30 TBF 6500	5511 3	0	25	

10 PC CUT OFF WHEEL METAL TIN SET-METAL



- Size: 115 x 1 x 22.23 mm
- For cutting all types of metal



Item No.	Description	EAN 69743345+	Inner	Outer
445059TN	10 PC Cut Off Wheel	5010 1	10	40

10 PC CUT OFF WHEEL METAL TIN SET-METAL



- Size: 125 x 1 x 22.23 mm
- For cutting all types of metal



Item No.	Description	EAN 69743345+	Inner	Outer
445065TN	10 PC Cut Off Wheel	5011 8	10	40



TACTIX SAW BLADE
FEATURES

Teeth Per Inch Selection Guide

3 TPI	6 TPI	8 TPI	10 TPI	14 TPI	18 TPI	24 TPI	GRIT
Wood							
Thick Metal: 8 mm and more							
Medium metal: 3-8 mm							
Thin metal: 3 mm and less							Abrasives

ROUGH ————— CUT QUALITY ————— SMOOTH

FAST ————— CUT SPEED ————— SLOW

10 PC JIG SAW BLADE SET



- Fast and clean cut for chipboard, MDF, plywood and thin metal

Contents:

3 pc 436001 (≈T101B, HCS, 10 TPI, clean for wood)

2 pc 436007 (≈T111C, HCS, 8 TPI, basic for wood)

3 pc 436013 (≈T144D, HCS, 6 TPI, speed for wood)

1 pc 436101 (≈T118A, HSS, 21 TPI, basic for metal)

1 pc 436103 (≈T118B, HSS, 12 TPI, basic for metal)

10 PC JIG SAW BLADE SET



- Fast and clean cut for chipboard, MDF, plywood and thin metal

Contents:

3 pc 436251 (≈U101B, HCS, 10 TPI, clean for wood)

2 pc 436257 (≈U111C, HCS, 8 TPI, basic for wood)

3 pc 436263 (≈U144D, HCS, 6 TPI, speed for wood)

1 pc 436301 (≈U118A, HSS, 21 TPI, basic for metal)

1 pc 436303 (≈U118B, HSS, 12 TPI, basic for metal)

10 PC JIG SAW BLADE SET



- Fast cut for chipboard, MDF, plywood and thin metal

Contents:

2 pc 436007 (≈T111C, HCS, 8 TPI, basic for wood)

3 pc 436009 (≈T119B, HCS, 12 TPI, basic for wood)

3 pc 436013 (≈T144D, HCS, 6 TPI, speed for wood)

2 pc 436101 (≈T118A, HCS, 21 TPI, basic for metal)

5 PC T-SHANK JIG SAW BLADES




- High carbon steel, straight and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood, wood<30 mm and closed pipes/profiles<30 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436001	100 mm (4 in.)	75 mm (3 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES

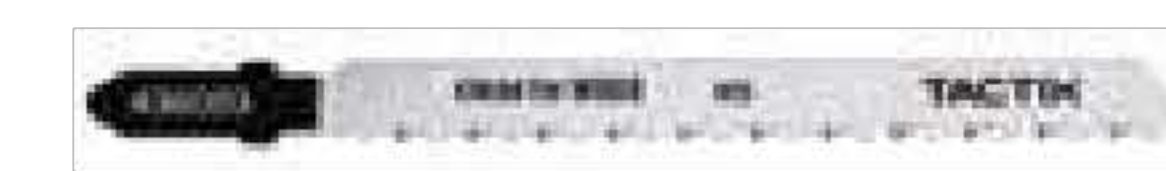

- High carbon steel, straight and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood and wood<45 mm

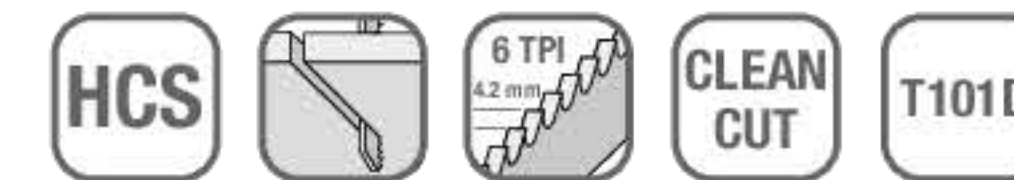


Item No.	Length	Work Length	EAN	Inner	Outer
436003	100 mm (4 in.)	75 mm (3 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES



- High carbon steel, straight and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood and wood<65 mm

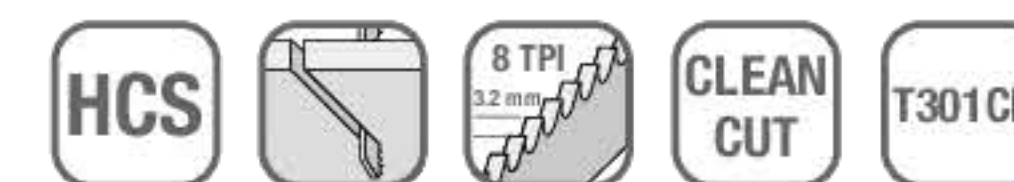


Item No.	Length	Work Length	EAN	Inner	Outer
436005	116 mm (4-1/2 in.)	91 mm (3-5/8 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES



- High carbon steel, straight cut
- Milled teeth
- Suitable for chipboard, MDF, plywood and wood<50 mm

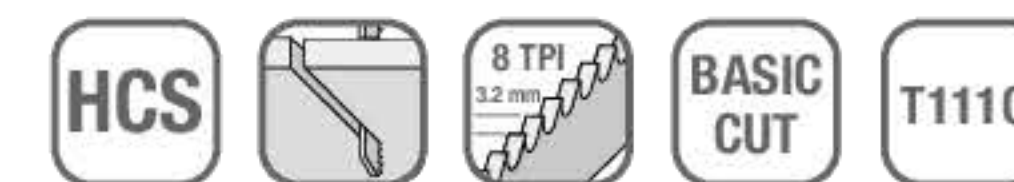


Item No.	Length	Work Length	EAN	Inner	Outer
436007	100 mm (4 in.)	75 mm (3 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES



- High carbon steel, straight cut
- Milled teeth
- Suitable for chipboard, MDF, plywood and wood<15 mm

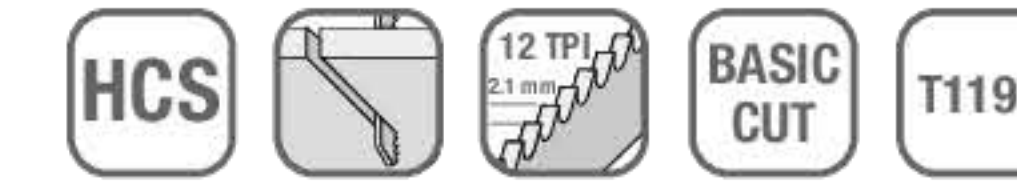


Item No.	Length	Work Length	EAN	Inner	Outer
436009	91 mm (3-9/16 in.)	67 mm (2-5/8 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES



- High carbon steel, curve cut
- Milled teeth
- Suitable for chipboard, MDF, plywood and wood<15 mm

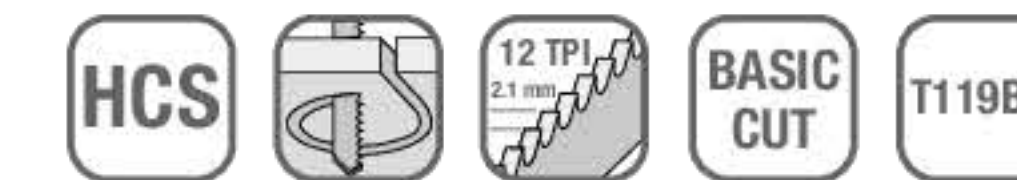

Item No.	Length	Work Length	EAN	Inner	Outer
436011	82 mm (3-1/4 in.)	57 mm (2-1/4 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES




- High carbon steel, straight and fast cut
- Ground teeth
- Suitable for chipboard, MDF, plywood and wood<50 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436013	100 mm (4 in.)	75 mm (3 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES

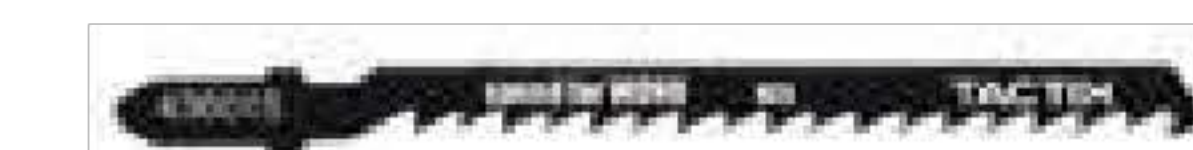

- High carbon steel, curve and fast cut
- Ground teeth
- Suitable for chipboard, MDF, plywood and wood<50 mm

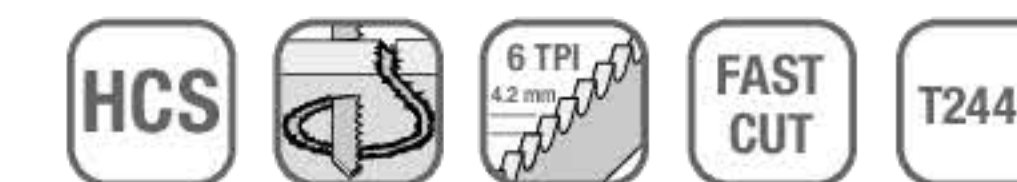

Item No.	Length	Work Length	EAN	Inner	Outer
436015	100 mm (4 in.)	75 mm (3 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES




- High carbon steel, straight and fast cut
- Ground teeth
- Suitable for chipboard, MDF, plywood and wood<100 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436017	132 mm (5-1/4 in.)	107 mm (4-3/16 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES

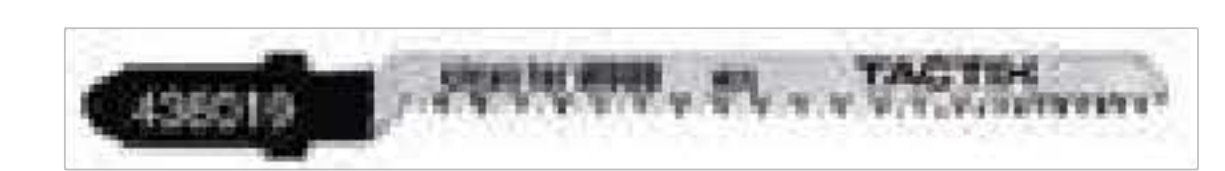

- High carbon steel, curve and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood and wood<15 mm

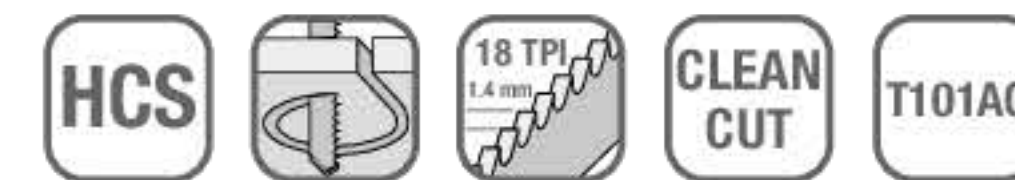


Item No.	Length	Work Length	EAN	Inner	Outer
436019	82 mm (3-1/4 in.)	57 mm (2-1/4 in.)	69426292+	20	200

5 PC T-SHANK JIG SAW BLADES



- High carbon steel, straight and clean cut
- Ground teeth and back
- Reverse tooth for splinter free cuts on top on work piece
- Suitable for chipboard, MDF, plywood and wood<30 mm

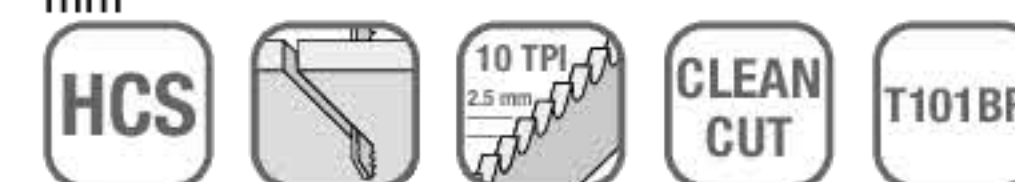

Item No.	Length	Work Length	EAN	Inner	Outer
436021	100 mm (4 in.)	75 mm (3 in.)	69426292+	20	200



5 PC T-SHANK JIG SAW BLADES



- Bi-metal, long life, straight cut
- Milled teeth
- Suitable for thin sheet metal 1.5-3 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436205	75 mm (3 in.)	50 mm (2 in.)	69426292+	2431 0	200

5 PC T-SHANK JIG SAW BLADES



- Bi-metal, long life, straight cut
- Milled teeth
- Special for aluminum and non-ferrous metals
- Suitable for thin sheet metal 1-3 mm and closed pipes/profiles<30 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436207	100 mm (4 in.)	75 mm (3 in.)	69426292+	2432 7	200

5 PC T-SHANK JIG SAW BLADES



- Bi-metal, long life, straight cut
- Milled teeth
- Suitable for thin sheet metal 2.5-6 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436201	75 mm (3 in.)	50 mm (2 in.)	69426292+	2429 7	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 2.5-6 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436103	75 mm (3 in.)	50 mm (2 in.)	69426292+	2421 1	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 0.5-1.5 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436105	75 mm (3 in.)	50 mm (2 in.)	69426292+	2422 8	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, curve cut
- Milled teeth
- Suitable for thin sheet metal 1-3 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436107	75 mm (3 in.)	50 mm (2 in.)	69426292+	2423 5	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 1-3 mm and closed pipes/profiles<65 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436109	132 mm (5-1/4 in.)	105 mm (4-1/8 in.)	69426292+	2424 2	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 2.5-6 mm and closed pipes/profiles<65 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436111	132 mm (5-1/4 in.)	105 mm (4-1/8 in.)	69426292+	2425 9	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for aluminum and non-ferrous metals
- Suitable for thin sheet metal 3-15 mm and closed pipes/profiles<30 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436115	100 mm (4 in.)	75 mm (3 in.)	69426292+	2427 3	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, curve cut
- Milled teeth
- Suitable for aluminum and non-ferrous metals
- Suitable for thin sheet metal 3-15 mm and closed pipes/profiles<30 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436117	100 mm (4 in.)	75 mm (3 in.)	69426292+	2428 0	200

5 PC T-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 1-3 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436101	75 mm (3 in.)	50 mm (2 in.)	69426292+	2420 4	200



5 PC T-SHANK JIG SAW BLADES



- Bi-metal, long life, straight and fast cut
- Ground teeth
- Suitable for hard and soft wood, plastic, plywood and laminated particleboard<60 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436213	100 mm (4 in.)	75 mm (3 in.)	69426292+	2435 8	200

5 PC T-SHANK JIG SAW BLADES



- Bi-metal, long life, straight and clean cut
- Ground teeth and back
- Suitable for hard and soft wood, plastic, plywood and laminated particleboard<30 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436215	100 mm (4 in.)	75 mm (3 in.)	69426292+	2436 5	200

5 PC T-SHANK JIG SAW BLADES



- Bi-metal, long life, straight and fast cut
- Milled teeth
- Suitable for hard and soft wood, plastic, plywood and laminated particleboard<60 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436217	132 mm (5-1/4 in.)	105 mm (4-1/8 in.)	69426292+	9321 7	200

5 PC T-SHANK JIG SAW BLADES



- High carbon steel, straight and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood, wood<60 mm
- Allow for angled and parallel cuts (use parallel guide)



Item No.	Length	Work Length	EAN	Inner	Outer
436203	100 mm (4 in.)	75 mm (3 in.)	69426292+	2418 1	200

5 PC T-SHANK JIG SAW BLADES



- High carbon steel, straight, fast and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood and wood<85 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436025	132 mm (5-1/4 in.)	107 mm (4-3/16 in.)	69426292+	2419 8	200

5 PC U-SHANK JIG SAW BLADES



- High carbon steel, straight and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood, wood<30 mm and closed pipes/profiles<30 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436251	100 mm (4 in.)	75 mm (3 in.)	69426292+	4262 8	200

5 PC U-SHANK JIG SAW BLADES



- High carbon steel, straight and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood and wood<45 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436253	100 mm (4 in.)	75 mm (3 in.)	69426292+	4263 5	200

5 pc U-SHANK JIG SAW BLADES



- High carbon steel, straight cut
- Milled teeth
- Suitable for chipboard, MDF, plywood and wood<50 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436257	100 mm (4 in.)	75 mm (3 in.)	69426292+	4265 9	200

5 PC U-SHANK JIG SAW BLADES




- High carbon steel, straight cut
- Milled teeth
- Suitable for chipboard, MDF, plywood and wood<15 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436259	91 mm (3-9/16 in.)	66 mm (2-5/8 in.)	69426292+	4266 6	200

5 PC U-SHANK JIG SAW BLADES



- High carbon steel, curve cut
- Milled teeth
- Suitable for chipboard, MDF, plywood and wood<15 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436261	82 mm (3-1/4 in.)	57 mm (2-1/4 in.)	69426292+	4267 3	200

5 PC U-SHANK JIG SAW BLADES



- High carbon steel, straight and fast cut
- Ground teeth
- Suitable for chipboard, MDF, plywood and wood<50 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436263	100 mm (4 in.)	80 mm (3-1/16 in.)	69426292+	4268 0	200

5 PC U-SHANK JIG SAW BLADES



- High carbon steel, curve and fast cut
- Ground teeth
- Suitable for chipboard, MDF, plywood and wood<50 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436265	100 mm (4 in.)	75 mm (3 in.)	69426292+	4269 7	200

5 PC U-SHANK JIG SAW BLADES



- Bi-metal, long life, straight and fast cut
- Ground teeth
- Suitable for hard and soft wood, plastic, plywood and laminated particleboard<60 mm

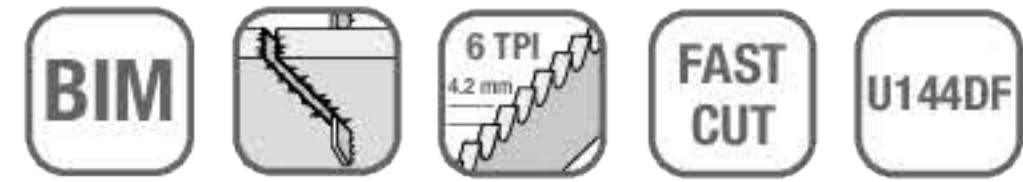

Item No.	Length	Work Length	EAN	Inner	Outer
436363	100 mm (4 in.)	75 mm (3 in.)	69426292+	4286 4	20 200

5 PC U-SHANK JIG SAW BLADES



- Bi-metal, long life, straight and clean cut
- Ground teeth and back
- Suitable for hard and soft wood, plastic, plywood and laminated particleboard<30 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436367	100 mm (4 in.)	75 mm (3 in.)	69426292+	4287 1	20 200

5 PC U-SHANK JIG SAW BLADES



- High carbon steel, curve and clean cut
- Ground teeth and back
- Suitable for chipboard, MDF, plywood and wood<15 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436269	82 mm (3-1/4 in.)	57 mm (2-1/4 in.)	69426292+	4271 0	20 200

5 PC U-SHANK JIG SAW BLADES



- High carbon steel, straight and clean cut
- Ground teeth and back
- Reverse tooth for splinter free cuts on top on work piece
- Suitable for chipboard, MDF, plywood and wood<30 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436271	100 mm (4 in.)	75 mm (3 in.)	69426292+	4272 7	20 200

5 PC U-SHANK JIG SAW BLADES



- Bi-metal, long life, straight cut
- Milled teeth
- Suitable for thin sheet metal 2.5-6 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436351	75 mm (3 in.)	50 mm (2 in.)	69426292+	4283 3	20 200

5 PC U-SHANK JIG SAW BLADES



- Bi-metal, long life, straight cut
- Milled teeth
- Suitable for thin sheet metal 1.5-3 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436355	75 mm (3 in.)	50 mm (2 in.)	69426292+	4284 0	20 200

5 PC U-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 0.5-1.5 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436305	75 mm (3 in.)	50 mm (2 in.)	69426292+	4277 2	20 200

5 PC U-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Special for aluminum and non-ferrous metals
- Suitable for thin sheet metal 2.5-6 mm and closed pipes/profiles<30 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436313	100 mm (4 in.)	75 mm (3 in.)	69426292+	4281 9	20 200

5 PC U-SHANK JIG SAW BLADES



- High speed steel, curve cut
- Milled teeth
- Special for aluminum and non-ferrous metal
- Suitable for thin sheet metal 3-15 mm and closed pipes/profiles<30 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436315	100 mm (4 in.)	75 mm (3 in.)	69426292+	4282 6	20 200

5 PC U-SHANK JIG SAW BLADES




- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 1-3 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436301	75 mm (3 in.)	50 mm (2 in.)	69426292+	4275 8	20 200

5 PC U-SHANK JIG SAW BLADES



- High speed steel, straight cut
- Milled teeth
- Suitable for thin sheet metal 2.5-6 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436303	75 mm (3 in.)	50 mm (2 in.)	69426292+	4276 5	20 200



2 PC RECIPROCATING SAW BLADES



- Bi-metal, long life
- Milled teeth
- Suitable for thin sheet metal 1.5-3 mm and closed pipes/profiles<100 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436431	150 mm (6 in.)	132 mm (5-1/4 in.)	69426292+	2440 2	20 200

2 PC RECIPROCATING SAW BLADES



- Bi-metal, long life
- Milled teeth
- Suitable for thin sheet metal 1.5-3 mm and closed pipes/profiles<100 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436433	150 mm (6 in.)	132 mm (5-1/4 in.)	69426292+	2441 9	20 200

2 PC RECIPROCATING SAW BLADES



- Bi-metal, long life
- Milled teeth
- Suitable for thin sheet metal 1.5-3 mm and closed pipes/profiles<175 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436435	225 mm (9 in.)	203 mm (8 in.)	69426292+	2442 6	20 200

2 PC RECIPROCATING SAW BLADES



- Stainless steel, long life
- Milled teeth
- For cutting bone, freezing meat




Item No.	Length	Work Length	EAN	Inner	Outer
436471	400 mm (15-3/4 in.)	380 mm (15 in.)	69426292+	6281 7	10 100

2 PC RECIPROCATING SAW BLADES



- Bi-metal, long life
- Milled teeth
- Suitable for coarse wood with nails

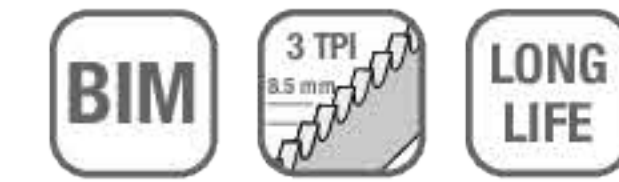

Item No.	Length	Work Length	EAN	Inner	Outer
436402	400 mm (16 in.)	380 mm (15 in.)	69426292+	5476 8	10 100

2 PC RECIPROCATING SAW BLADES



- High carbon steel, economic cut
- Milled teeth
- Suitable for coarse wood free of nails 20-175 mm




Item No.	Length	Work Length	EAN	Inner	Outer
436401	225 mm (9 in.)	203 mm (8 in.)	69426292+	2437 2	20 200

2 PC RECIPROCATING SAW BLADES



- High carbon steel, clean cut
- Milled teeth
- Suitable for chipboard, MDF, plywood, plastic, building wood<100 mm and closed pipes/profiles<100 mm
- Shaped for a plunge cut

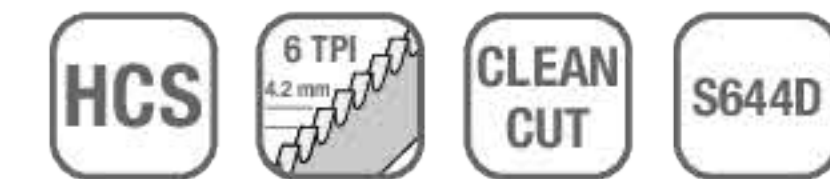

Item No.	Length	Work Length	EAN	Inner	Outer
436403	150 mm (6 in.)	127 mm (5 in.)	69426292+	2438 9	20 200

10 PC RECIPROCATING SAW BLADES SET



- 2 pc150 mm (6 in.) x 6 TPI wood cutting – HCS
- 4 pc150 mm (6 in.) x 24 TPI metal cutting - Bi-metal
- 2 pc 225 mm (9 in.) x 14 TPI metal cutting - Bi-metal
- 2 pc 240 mm (9-1/2 in.) x 5 TPI wood cutting – HCS
- TACTIX PTA INTERLOCK RANGE "L" Size

2 PC RECIPROCATING SAW BLADES



- High carbon steel, fast cut
- Ground teeth
- Suitable for pruning green wood<150 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436405	230 mm (9 in.)	203 mm (8 in.)	69426292+	2439 6	20 200

2 PC RECIPROCATING SAW BLADES



- Bi-metal, long life
- Milled teeth
- Suitable for plaster<100 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436439	150 mm (6 in.)	132 mm (5-1/4 in.)	69426292+	2444 0	20 200

2 PC RECIPROCATING SAW BLADES



- Bi-metal, long life
- Milled teeth
- Suitable for wood<150 mm, thin sheet metal<12 mm, aluminum and plastic<12 mm



Item No.	Length	Work Length	EAN	Inner	Outer
436437	225 mm (9 in.)	203 mm (8 in.)	69426292+	2443 3	20 200



Item No.	Description	EAN	Inner	Outer
436410	10 pc Reciprocating Saw Blades Set	69762270+	3564 1	6 12

BI-METAL HOLE SAW



- Bi-metal construction with HSS M3 cutting teeth, 4-6 TPI variable tooth pitch for economic fast cutting
- For holes in steel, cast iron, aluminium, wood and plastic, use with arbor



Item No.	Cutting DIA.	EAN 69426292+	Inner	Outer
440007	19 mm (3/4 in.)	2461 7	6	72
440013	22 mm (7/8 in.)	2464 8	6	72
440017	25 mm (1 in.)	2466 2	6	72
440021	29 mm (1-1/8 in.)	2468 6	6	72
440025	32 mm (1-1/4 in.)	2470 9	6	72
440029	35 mm (1-3/8 in.)	2472 3	6	72
440033	38 mm (1-1/2 in.)	2474 7	6	72
440035	40 mm (1-9/16 in.)	2475 4	6	72
440037	41 mm (1-5/8 in.)	2476 1	6	72
440041	44 mm (1-3/4 in.)	2478 5	6	72
440047	51 mm (2 in.)	2481 5	6	72
440051	54 mm (2-1/8 in.)	2483 9	6	72
440055	57 mm (2-1/4 in.)	2485 3	6	72
440061	64 mm (2-1/2 in.)	2488 4	6	72
440065	67 mm (2-5/8 in.)	2490 7	6	36
440067	68 mm (2-11/16 in.)	2491 4	6	36
440069	70 mm (2-3/4 in.)	2492 1	6	36
440071	73 mm (2-7/8 in.)	2493 8	6	36
440073	76 mm (3 in.)	2494 5	6	36
440077	83 mm (3-1/4 in.)	2496 9	6	36
440081	89 mm (3-1/2 in.)	2498 3	6	36
440085	95 mm (3-3/4 in.)	2500 3	6	36
440089	102 mm (4 in.)	2502 7	6	36
440091	105 mm (4-1/8 in.)	2503 4	4	24
440095	111 mm (4-3/8 in.)	2505 8	4	24
440097	114 mm (4-1/2 in.)	2506 5	4	24
440101	127 mm (5 in.)	2508 9	4	24
440105	152 mm (6 in.)	2510 2	4	12



5 PC HOLE SAW SET



- 4 pc hole saw: 51 mm (2 in.), 76 mm (3 in.), 86 mm (3-3/8 in.), 111 mm (4-3/8 in.)
- 1 pc arbor for use with 32-150 mm diameter hole saws

Item No.	Description	EAN 69426292+	Inner	Outer
440385	5 pc Hole Saw Set	5477 5	5	10

BI-METAL HOLE SAW WITH BUILT-IN ARBOR



- Bi-metal construction with HSS M3 cutting teeth, 4-6 TPI variable tooth pitch for economic fast cutting
- For holes in steel, cast iron, aluminium, wood and plastic, use with arbor



Item No.	Cutting DIA.	Shank DIA.	EAN 69426292+	Inner	Outer
440202	16 mm (5/8 in.)	9.5 mm (3/8 in.) hex	6492 7	12	72
440204	19 mm (3/4 in.)	9.5 mm (3/8 in.) hex	6493 4	12	72
440207	22 mm (7/8 in.)	9.5 mm (3/8 in.) hex	6494 1	12	72
440209	25 mm (1 in.)	9.5 mm (3/8 in.) hex	6495 8	12	72
440211	28 mm (1-1/8 in.)	9.5 mm (3/8 in.) hex	6496 5	12	72
440213	32 mm (1-1/4 in.)	11.1 mm (7/16 in.) hex	6497 2	12	72
440215	35 mm (1-3/8 in.)	11.1 mm (7/16 in.) hex	6498 9	12	72
440217	38 mm (1-1/2 in.)	11.1 mm (7/16 in.) hex	6499 6	12	72
440219	41 mm (1-5/8 in.)	11.1 mm (7/16 in.) hex	6500 9	12	72
440221	44 mm (1-3/4 in.)	11.1 mm (7/16 in.) hex	6501 6	12	72
440223	48 mm (1-7/8 in.)	11.1 mm (7/16 in.) hex	6502 3	12	72
440224	51 mm (2 in.)	11.1 mm (7/16 in.) hex	6503 0	12	72
440226	54 mm (2-1/8 in.)	11.1 mm (7/16 in.) hex	6504 7	12	72
440228	57 mm (2-1/4 in.)	11.1 mm (7/16 in.) hex	6505 4	12	72
440230	60 mm (2-3/8 in.)	11.1 mm (7/16 in.) hex	6506 1	12	72
440231	64 mm (2-1/2 in.)	11.1 mm (7/16 in.) hex	6507 8	12	72
440235	67 mm (2-5/8 in.)	11.1 mm (7/16 in.) hex	6508 5	6	36
440237	76 mm (3 in.)	11.1 mm (7/16 in.) hex	6509 2	6	36

JAPANESE HOLE SAW



- HSS hole saw with 6 mm HSS drill bit
- For cutting holes in iron, aluminium, cast metals, wood, plaster, steel pipes, stainless steel(1.0 mm)
- With 1 pc hex wrench

Item No.	Cutting DIA.	Shank DIA.	EAN 69426292+	Inner	Outer
441016	16 mm	10 mm	5257 3	10	60
441019	19 mm	10 mm	5258 0	10	60
441020	20 mm	10 mm	5259 7	10	60
441021	21 mm	10 mm	5260 3	10	60
441022	22 mm	10 mm	5261 0	10	60
441025	25 mm	12 mm	5262 7	10	60
441026	26 mm	12 mm	5263 4	10	60
441028	28 mm	12 mm	5264 1	10	60
441030	30 mm	12 mm	5265 8	10	60
441032	32 mm	12 mm	5266 5	10	60
441035	35 mm	12 mm	5267 2	10	60
441038	38 mm	14 mm	5268 9	10	60
441040	40 mm	14 mm	5269 6	10	60
441041	41 mm	14 mm	5270 2	10	60
441042	42 mm	14 mm	5271 9	10	60
441043	43 mm	14 mm	5272 6	10	30
441045	45 mm	14 mm	5273 3	10	30
441048	48 mm	14 mm	5274 0	10	30
441051	51 mm	14 mm	5275 7	10	30
441054	54 mm	14 mm	5276 4	10	30
441058	58 mm	14 mm	5277 1	10	30
441060	60 mm	14 mm	5278 8	10	30
441064	64 mm	14 mm	5279 5	10	30
441076	76 mm	14 mm	5280 1	10	30

3 PC DOOR LOCK INSTALLATION SET



- For installing door locks
- Includes 54 mm (2-1/8 in.) hole saw, 22 mm (7/8 in.) wood spade, 9.5 mm (3/8 in.) arbor

Item No.	Size	EAN 69426292+	Inner	Outer
440693	3 pc Door Lock Installation Set	5134 7	6	48

5 PC HOLE SAW SET



- For cutting holes in wood and plastic
- Includes 4 pc hole saw: 32 mm (1-1/4 in.), 38 mm (1-1/2 in.), 51 mm (2 in.), 54 mm (2-1/8 in.), 1 pc 9.5 mm (3/8 in.) arbor

Item No.	Size	EAN 69426292+	Inner	Outer
440695	5 pc Hole Saw Set	5135 4	6	48


7 PC HOLE SAW SET



- High carbon steel
- For cutting holes in wood and plastic
- 25 mm (1 in.) cutting depth
- Includes 26 mm (1 in.), 32 mm (1-1/4 in.), 38 mm (1-1/2 in.), 45 mm (1-3/4 in.), 50 mm (2 in.), 56 mm (2-1/4 in.), 63 mm (2-1/2 in.), 25 mm (1 in.) cutting depth

Item No.	Size	EAN 69426292+	Inner	Outer
440587	7 pc Hole Saw Set	4913 9	6	36

ADJUSTABLE HOLE SAW

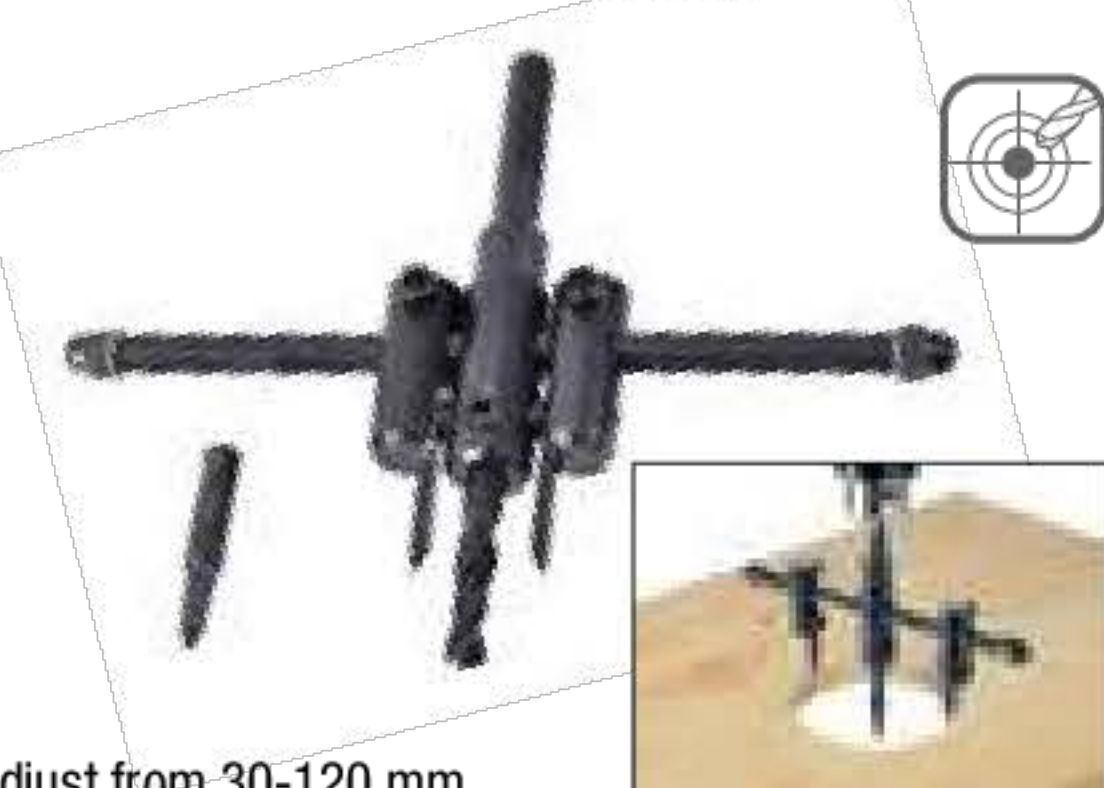

- Adjust from 30-120 mm

Item No.	Size	EAN 69426292+	Inner	Outer
440703	Adjustable Hole Saw	6055 4	6	24

CARBIDE HOLE SAW



- Tungsten carbide teeth provides extreme hardness and sharpness.
- The carbide hole saw can quickly drill through ceramics and plastic.
- Used for drilling holes for water pipes, exhaust hoses, air conditioning drilling operations, etc.



Item No.	Cutting DIA.	EAN 69426292+	Inner	Outer
440426	33 mm	4793 7	12	72
440440	43 mm	4794 4	12	72
440465	67 mm	4797 5	6	36
440471	73 mm	4798 2	6	36
440477	83 mm	4799 9	6	36

ARBOR FOR HOLE SAW



- For use with 14-30 mm diameter hole saws
- Supplied complete with 1/4 in. HSS pilot drill
- 9.5 mm (3/8 in.) hex shank



Item No.	Size	EAN 69426292+	Inner	Outer
440303	≤30 mm (1-3/16 in.)	2520 1	10	60

ARBOR FOR HOLE SAW



- For use with 32-203 mm diameter hole saws
- Supplied complete with 1/4 in. HSS pilot drill
- 11.1 mm (7/16 in.) hex shank



Item No.	Size	EAN 69426292+	Inner	Outer
440311	≥32 mm (1-1/4 in.)	2524 9	10	60

7 PC CARBIDE HOLE SAW

- Includes 5 pc hole saws 33 mm, 53 mm, 67 mm, 73 mm, 83 mm
- 1 pc pilot drill bit
- 1 pc aluminium plate



Item No.	Description	EAN 69426292+	Inner	Outer
440537	7 pc Carbide Hole Saw	4802 6	0	10

ARBOR FOR HOLE SAW



- For use with 14-30 mm diameter hole saws
- Supplied complete with 1/4 in. HSS pilot drill
- SDS plus shank



Item No.	Size	EAN 69426292+	Inner	Outer
440315	≤30 mm (1-3/16 in.)	2526 3	10	60

ARBOR FOR HOLE SAW



- For use with 32-150 mm diameter hole saws
- Supplied complete with 1/4 in. HSS pilot drill
- SDS plus shank




Item No.	Size	EAN 69426292+	Inner	Outer
440317	≥32 mm (1-1/4 in.)	2527 0	10	60

300 mm EXTENSION



- Work with #440311
- 11.1 mm (7/16 in.) hex shank



Item No.	Size	EAN 69426292+	Inner	Outer
440361	300 mm (12 in.) Extension	2536 2	10	40



ALUMINIUM PLATE

- For use with carbide holesaw under 83 mm (3-1/4 in.)

Item No.	Size	EAN 69426292+	Inner	Outer
440525	83 mm (3-1/4 in.)	4801 9	6	36

PILOT DRILL BIT



- For 440303, 440311, 440315, 440317
- For Bi-metal hole saw with built-in arbor : 440202-440237



Item No.	Description	EAN 69426292+	Inner	Outer
440365	6.35 x 75 mm (1/4 x 3 in.)	2538 6	20	120
440367	6.35 x 105 mm (1/4 x 4-1/4 in.)	2539 3	20	120

PILOT DRILL BIT



- For use with aluminium plate (440525)



Item No.	Description	EAN 69426292+	Inner	Outer
440523	9.5 x 140 mm (3/8 x 5-1/2 in.)	4800 2	10	60



WOOD CUTTING

METAL CUTTING

MORTAR POLISHING

GROUT REMOVAL

WOOD GRINDING

MULTI SAW BLADE



HCS

- High carbon steel
- Suitable for wood, plasterboard and soft plastic
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437001	10 x 34 mm	3 pc	6163 6	10	60
437003	20 x 34 mm	3 pc	6164 3	10	60



MULTI SAW BLADE



HCS

- High carbon steel
- Suitable for wood, plasterboard and soft plastic
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437011	65 x 40 mm	1 pc	6168 1	10	60



MULTI SAW BLADE



BIM

- Bi-metal for long life
- Suitable for sheet metal, wood with nail, plastic and etc.
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437033	20 x 36 mm	1 pc	6172 8	10	60



MULTI SAW BLADE



HCS

- High carbon steel
- Suitable for wood, plasterboard and soft plastic
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437005	32 x 40 mm	3 pc	6165 0	10	60



MULTI SAW BLADE



HCS

- High carbon steel
- Provide for right angle cuts
- Suitable for wood, plasterboard and soft plastic
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437013	87 mm	1 pc	6169 8	10	60



MULTI SAW BLADE



BIM

- Bi-metal for long life
- Suitable for sheet metal, wood with nail, plastic and etc.
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437035	28 x 48 mm	1 pc	6173 5	10	60



MULTI SAW BLADE



HCS

FAST CUT

- High carbon steel
- Suitable for wood, plasterboard and soft plastic
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437007	32 x 40 mm	1 pc	A + 6166 7	10	60
437008	32 x 40 mm	3 pc	B + 7803 1	10	60



MULTI SAW BLADE



BIM

- Bi-metal for long life
- Suitable for sheet metal, wood with nail, plastic and etc.
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437045	65 x 40 mm	1 pc	6175 9	10	60



MULTI SAW BLADE



BIM

- Bi-metal for long life
- Suitable for sheet metal, wood with nail, plastic and etc.
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437037	32 x 40 mm	1 pc	6174 2	10	60



MULTI SAW BLADE



HCS

- High carbon steel
- Suitable for wood, plasterboard and soft plastic
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437009	44 x 40 mm	3 pc	6167 4	10	60



MULTI SAW BLADE



BIM

- Bi-metal for long life
- Suitable for sheet metal, wood with nail, plastic and etc.
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437031	10 x 34 mm	1 pc	6171 1	10	60



MULTI SAW BLADE



BIM

- Bi-metal for long life
- suitable for metal, wood, plastic and etc
- Quick change function

Item No.	Work Size	Qty	EAN	Inner	Outer
437039	87 mm	1 pc	7801 7	10	60



MULTI SAW BLADE



STAINLESS
STEEL

- Stainless steel
- Suitable for removing carpet paint, tape, glue residue and mortar
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437021	52 x 28 mm	1 pc	69426292+	7802 4	10 60

MULTI SAW BLADE ROUND



BIM

- High speed steel
- Suitable for metal, copper, wood, plasterboard, plastic and etc
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437057	80 mm	1 pc	69708346+	7799 7	10 60

MULTI SAW BLADE DELTA CARBIDE



TCT

- Tungsten carbide tip
- Suitable for polishing cement, ceramic, tile
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437071	78 mm	1 pc	69426292+	6178 0	10 60

MULTI SAW BLADE CARBIDE



TCT

- Tungsten carbide tip
- Suitable for polishing grout, ceramic tile, concrete, mortar
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437073	33 mm	1 pc	69708346+	7798 0	10 60

MULTI SAW BLADE ROUND CARBIDE



TCT

- Tungsten carbide tip
- Suitable for polishing cement, ceramic, tile
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437075	65 mm	1 pc	69426292+	6179 7	10 60

MULTI SAW BLADE ROUND CARBIDE



TCT

- Tungsten carbide tip
- Suitable for polishing grout, ceramic tile, concrete, mortar
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437077	88 mm	1 pc	69426292+	6180 3	10 60

MULTI SAW BLADE ROUND DIAMOND



Diamond

- Diamond tip
- Suitable for chipping ceramic, tile, grout, concrete, mortar
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437083	88 mm	1 pc	6181 0	10 60	

MULTI SAW BLADE ROUND DIAMOND



Diamond

- Diamond tip
- Suitable for chipping ceramic, tile, grout, concrete, mortar
- Quick change function



Item No.	Work Size	Qty	EAN	Inner	Outer
437085	65 mm	1 pc	69708346+	7800 0	10 60

DELTA SANDING PAD



STAINLESS
STEEL

- Use with sand paper,
- Quick change function




Item No.	Work Size	Qty	EAN	Inner	Outer
437093	92 mm	1 pc	6182 7	10 60	

[1]Compatible with most brands of Multi Tool including: ROCKWELL®, MAKITA®, DEWALT®, MILWAUKEE®, OZITO®, RYOBI®, BOSCH®, DREMEL®, AEG®, FEIN®, SKIL®, WORX®, RIDGID®, EINHELL®, CRAFTSMAN®, MASTERCRAFT®, BLACK & DECKER®

Rockwell® is a registered trade mark of Positec Group Limited | Makita® is a registered trade mark of Makita Corporation | DeWalt® is a registered trade mark of The Black & Decker Corporation | Milwaukee® is a registered trade mark of Milwaukee Electric Tool Corporation | Ozito® is a registered trade mark of Ozito Industries Pty Ltd | Ryobi® is a registered trade mark of Ryobi Ltd | Bosch® is a registered trade mark of Robert Bosch G.m.b.H | Dremel® is a registered trade mark of Robert Bosch Tool Corporation | AEG® is a registered trade mark of AB Electrolux | Fein® is a registered trade mark of C. & E. Fein GmbH | Skil® is a registered trade mark of Nanjing Chervon Industry Co., Ltd. | Worx® is a registered trade mark of Positec Group Limited | RIDGID® is a registered trade mark of RIDGID, INC | Einhell® is a registered trade mark of Einhell Germany AG | Craftsman® is a registered trade mark of Stanley Black & Decker, INC | Mastercraft® is a registered trade mark of Canadian Tire Corporation, Limited | Black & Decker® is a registered trade mark of The Black & Decker Corporation

IMPACT SCREWDRIVER BITS


TACTIX Impact bits achieve higher torsion compared to other Impact bits on the market

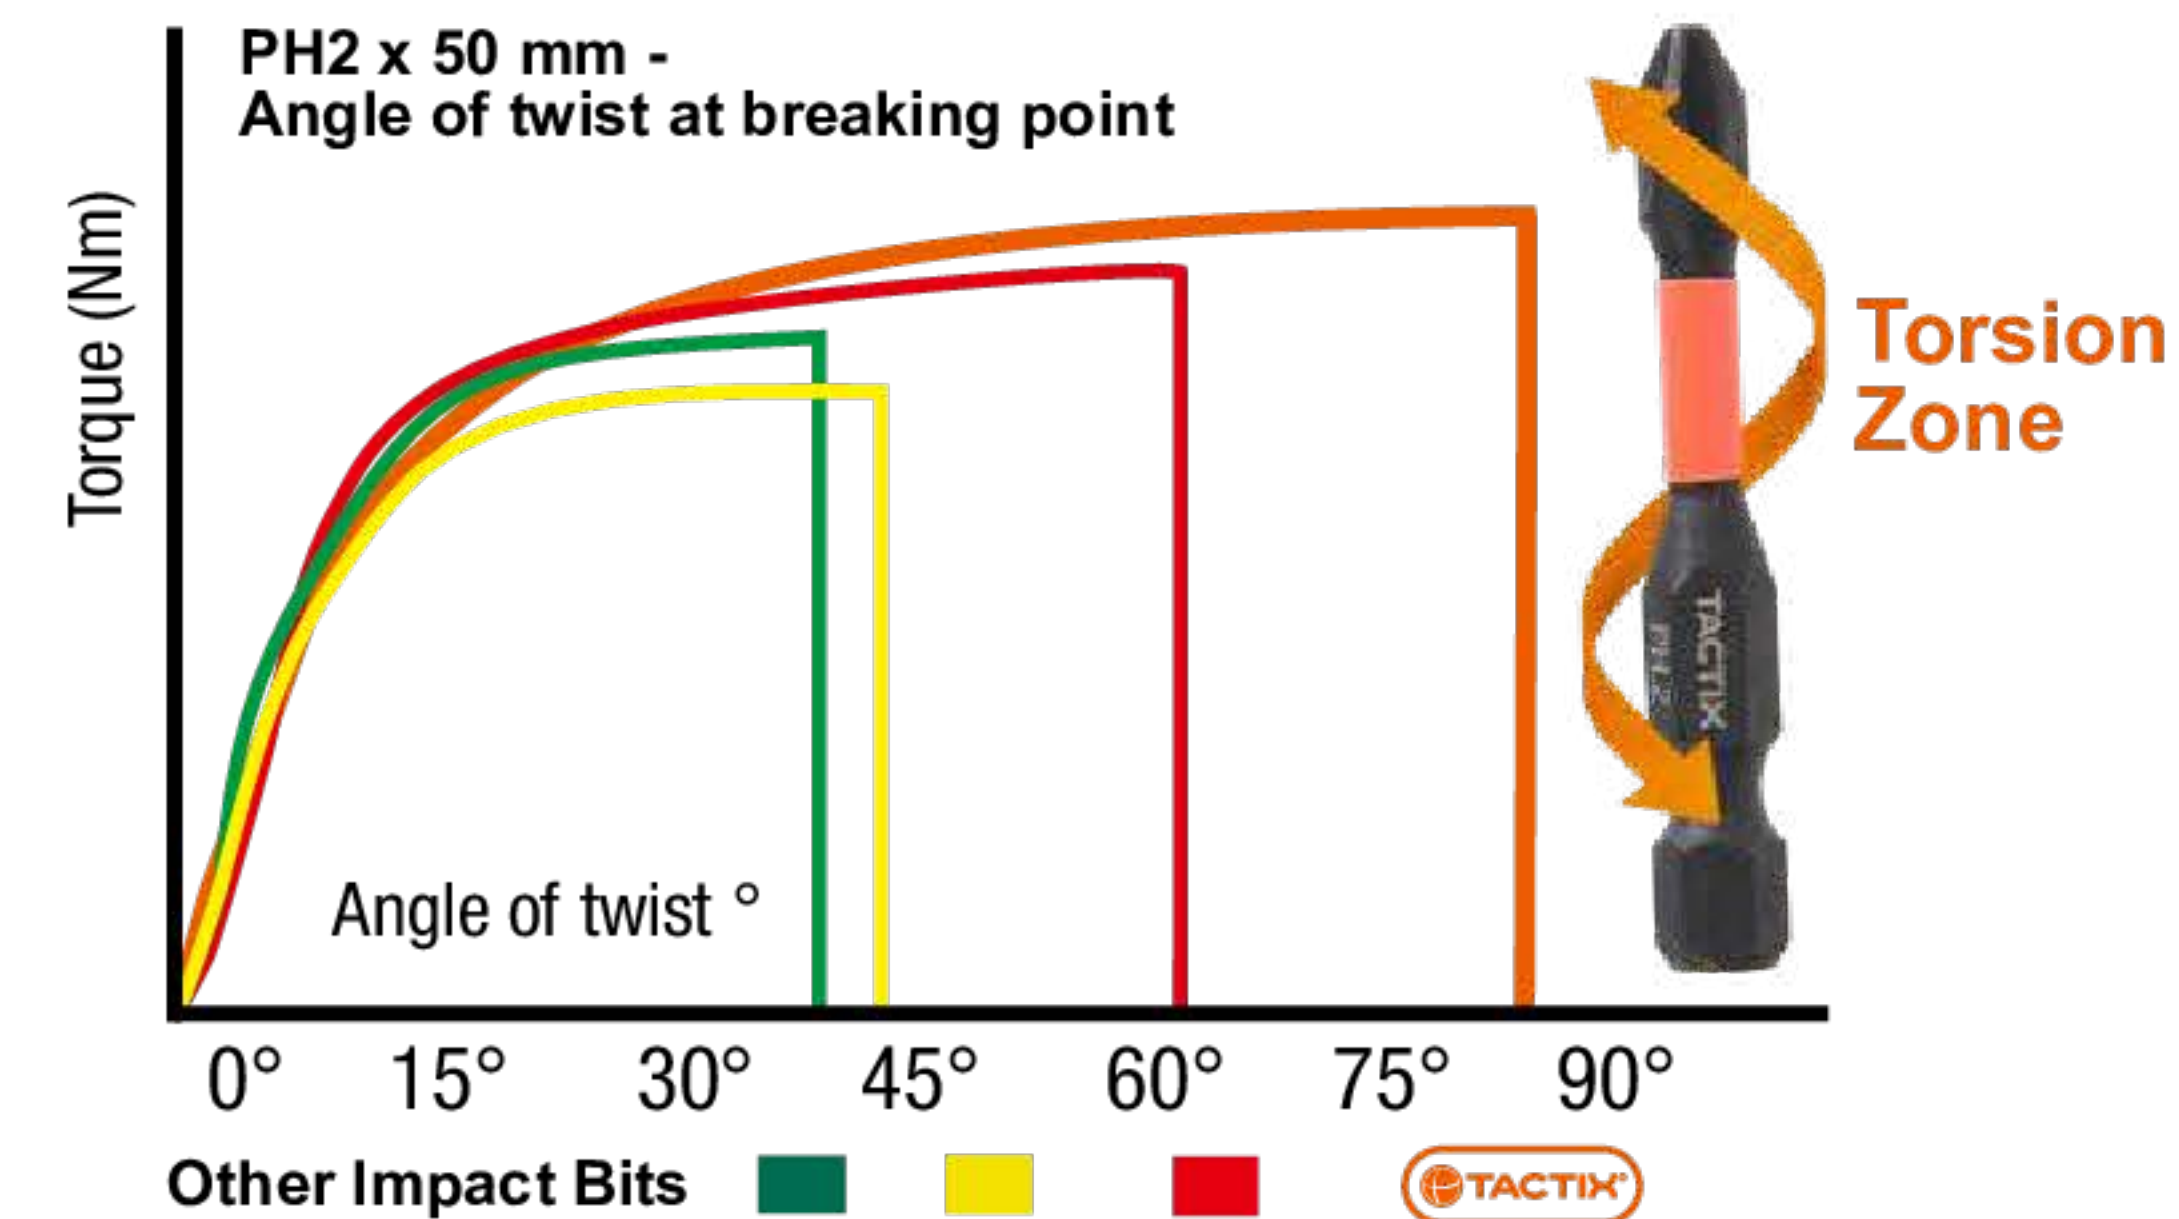

- Torsion zone**
- Absorb torque peaks reducing stress at the bit tip
 - Outstanding durability
 - Energy saving impact distribution



Superior performance out last the competition

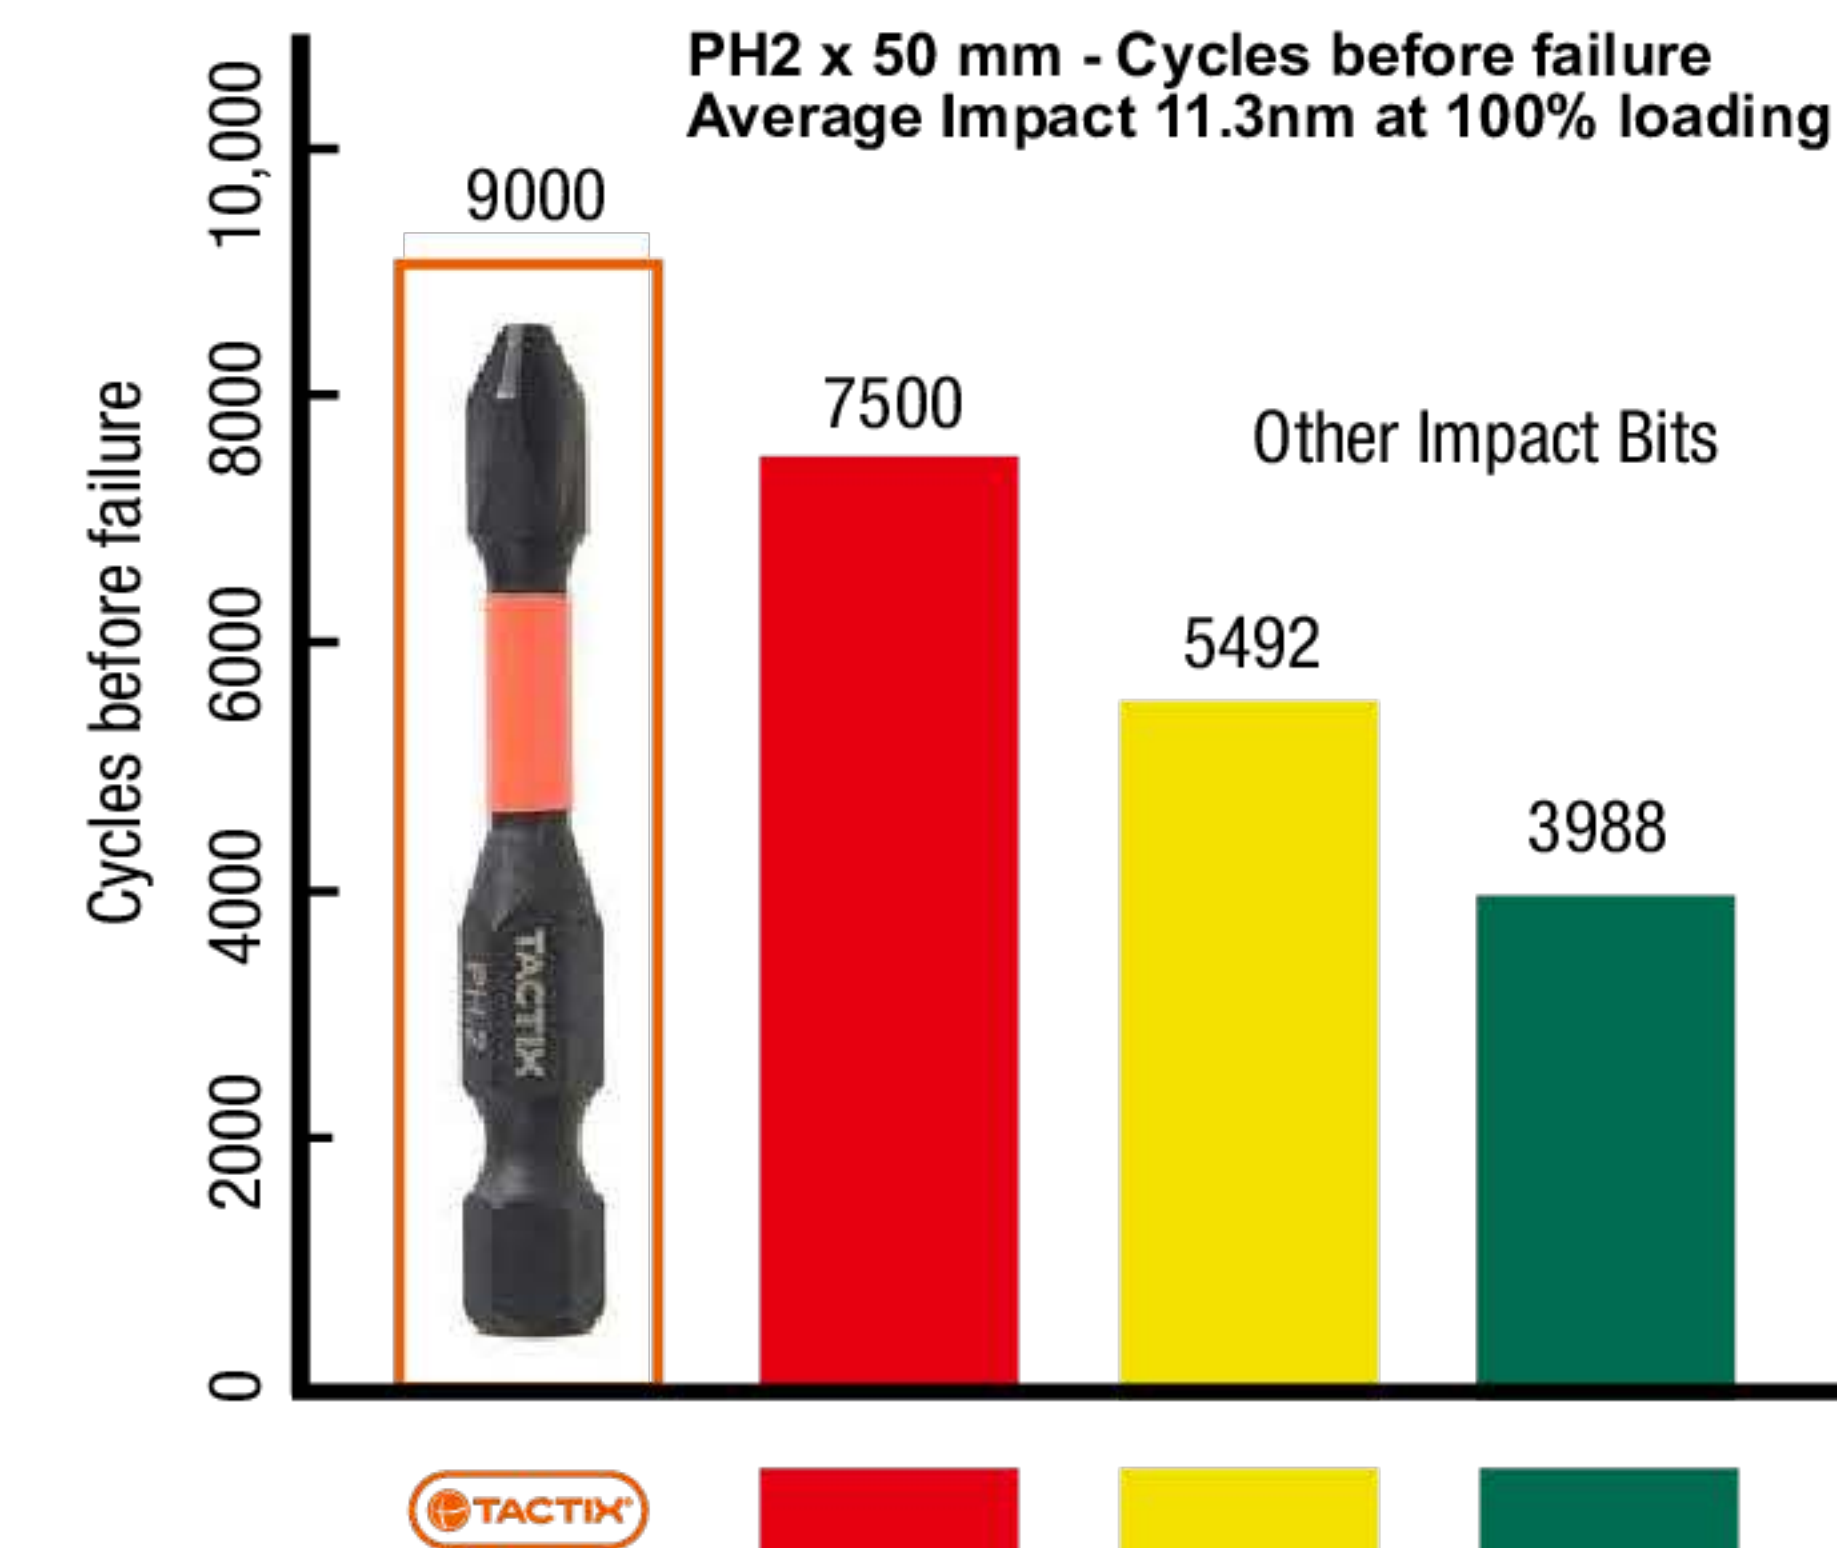

SQUARE IMPACT SCREWDRIVER BITS

Item No.	Size	Length	Quantity	EAN	Inner	Outer
455301	#1	25 mm (1 in.)	3	6804 8	10 60	
455302	#2	25 mm (1 in.)	3	6805 5	10 60	
455303	#3	25 mm (1 in.)	3	6806 2	10 60	
455312	#2	50 mm (2 in.)	2	6807 9	10 60	
455322	#2	75 mm (3 in.)	1	6808 6	10 60	

SLOTTED IMPACT SCREWDRIVER BITS

Item No.	Size	Length	Quantity	EAN	Inner	Outer
455005	5.5 mm	25 mm (1 in.)	3	6788 1	10 60	
455006	6.5 mm	25 mm (1 in.)	3	6789 8	10 60	

HEX IMPACT SCREWDRIVER BITS

Item No.	Size	Length	Quantity	EAN	Inner	Outer
455604	4 mm	25 mm (1 in.)	3	6821 5	10 60	
455605	5 mm	25 mm (1 in.)	3	6822 2	10 60	
455606	6 mm	25 mm (1 in.)	3	6823 9	10 60	

PHILLIPS IMPACT SCREWDRIVER BITS

Item No.	Size	Length	Quantity	EAN	Inner	Outer
455101	#1	25 mm (1 in.)	3	6790 4	10 60	
455102	#2	25 mm (1 in.)	3	6791 1	10 60	
455103	#3	25 mm (1 in.)	3	6792 8	10 60	
455112	#2	50 mm (2 in.)	2	6793 5	10 60	
455113	#3	50 mm (2 in.)	2	6794 2	10 60	
455122	#2	75 mm (3 in.)	1	6795 9	10 60	
455123	#3	75 mm (3 in.)	1	6796 6	10 60	

POZI IMPACT SCREWDRIVER BITS

Item No.	Size	Length	Quantity	EAN	Inner	Outer
455201	#1	25 mm (1 in.)	3	6797 3	10 60	
455202	#2	25 mm (1 in.)	3	6798 0	10 60	
455203	#3	25 mm (1 in.)	3	6799 7	10 60	
455212	#2	50 mm (2 in.)	2	6800 0	10 60	
455213	#3	50 mm (2 in.)	2	6801 7	10 60	
455222	#2	75 mm (3 in.)	1	6802 4	10 60	
455223	#3	75 mm (3 in.)	1	6803 1	10 60	

TORX® IMPACT SCREWDRIVER BITS

Item No.	Size	Length	Quantity	EAN	Inner	Outer
455402	T-15	25 mm (1 in.)	3	6809 3	10 60	
455403	T-20	25 mm (1 in.)	3	6810 9	10 60	
455404	T-25	25 mm (1 in.)	3	6811 6	10 60	
455406	T-30	25 mm (1 in.)	3	6812 3	10 60	
455408	T-40	25 mm (1 in.)	3	6813 0	10 60	
455423	T-20	50 mm (2 in.)	2	6814 7	10 60	
455424	T-25	50 mm (2 in.)	2	6815 4	10 60	
455426	T-30	50 mm (2 in.)	2	6816 1	10 60	
455428	T-40	50 mm (2 in.)	2	6817 8	10 60	
455441	T-10	75 mm (3 in.)	1	7249 6	10 60	
455442	T-15	75 mm (3 in.)	1	7250 2	10 60	
455443	T-20	75 mm (3 in.)	1	7251 9	10 60	
455444	T-25	75 mm (3 in.)	1	6818 5	10 60	
455446	T-30	75 mm (3 in.)	1	6819 2	10 60	
455448	T-40	75 mm (3 in.)	1	6820 8	10 60	

Torx® is a Trademark of Textron Fastening Systems

IMPACT MAGNETIC NUT DRIVER

- Magnetic shaft holds bits securely
- Special material for impact function



Item No.	Size	Length	EAN 69426292+	Inner	Outer
456007	7 mm	50 mm (2 in.)	6824 6	10	60
456008	8 mm	50 mm (2 in.)	6825 3	10	60
456010	10 mm	50 mm (2 in.)	6826 0	10	60
456011	11 mm	50 mm (2 in.)	6827 7	10	60
456012	12 mm	50 mm (2 in.)	6828 4	10	60
456021	1/4 in.	50 mm (2 in.)	6829 1	10	60
456023	5/16 in.	50 mm (2 in.)	6830 7	10	60
456025	3/8 in.	50 mm (2 in.)	6831 4	10	60
456027	7/16 in.	50 mm (2 in.)	6832 1	10	60
456029	1/2 in.	50 mm (2 in.)	6833 8	10	60

IMPACT MAGNETIC BIT HOLDER

- Magnetic shaft holds bits securely



Item No.	Length	EAN 69426292+	Inner	Outer
456513	55 mm (2-3/16 in.)	6838 3	10	60

IMPACT QUICK CHUCK

- Easy one-hand auto loading



Item No.	Length	EAN 69426292+	Inner	Outer
456515	65 mm (2-9/16 in.)	6839 0	10	60



- Easy one-hand auto loading
- Push accessory into impact chuck to load



- Pull back sleeve to release accessory

IMPACT QUICK CHUCK

- Easy one-hand auto loading



Item No.	Length	EAN 69426292+	Inner	Outer
456517	150 mm (6 in.)	6840 6	10	60

IMPACT MAGNETIC BIT HOLDER

- Magnetic shaft holds bits securely
- Special material for impact function



Item No.	Length	EAN 69426292+	Inner	Outer
456511	60 mm (2-3/8 in.)	6837 6	10	60

IMPACT BIT SOCKET ADAPTOR

- Special material for impact function



Item No.	Size	Length	EAN 69426292+	Inner	Outer
456501	1/4 in.	50 mm (2 in.)	6834 5	10	60
456502	3/8 in.	50 mm (2 in.)	6835 2	10	60
456503	1/2 in.	50 mm (2 in.)	6836 9	10	60

7 PC PHILLIPS BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
452001	7 pc PHILLIPS bit set	7240 3	12	48

11 PC PHILLIPS BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
452041	11 pc PHILLIPS bit set	7243 4	6	36

7 PC PHILLIPS IMPACT BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
455851	7 pc PHILLIPS impact bit set	7252 6	12	48

11 PC PHILLIPS IMPACT BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
455871	7 pc PHILLIPS impact bit set	7255 7	6	36

7 PC TORX BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
452003	7 pc TORX® bit set	7241 0	12	48

11 PC TORX BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
452043	11 pc TORX® bit set	7244 1	6	36

7 PC TORX IMPACT BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
455853	7 pc TORX® impact bit set	7253 3	12	48

11 PC TORX IMPACT BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
455873	11 pc TORX® impact bit set	7256 4	6	36

7 PC BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
452004	7 pc bit set	7242 7	12	48

11 PC BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
452044	11 pc bit set	7245 8	6	36

7 PC IMPACT BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
455854	7 pc impact bit set	7254 0	12	48

11 PC IMPACT BIT SET



Item No.	Description	EAN 69426292+	Inner	Outer
455874	11 pc impact bit set	7245 8	6	36



PHILLIPS
 SLOT
 POZI
 TORX
 HEX
 TORX TAMPER

56 PC COLOR QUICK CHANGE DRIVER BIT SET



- 48 pc 25 mm bit **S2**
- 4 mm x 2, 5.5 mm x 2, 6.5 mm x 2
 - #1 x 3, #2 x 3, #3 x 3
 - #1 x 3, #2 x 3, #3 x 3
 - 3, 4, 5 mm
 - T-10 x 2, T-15 x 2, T-20 x 2, T-25 x 2, T-27 x 2, T-30 x 2, T-40 x 2
 - T-10, T-15, T-20, T-25, T-27, T-30, T-40
- 7 pc 75 mm bit **S2**
- 6 mm
 - #1, #2
 - #2, #3
 - T-20, T-25
- 1 pc stainless steel quick change chuck

Item No.	Description	EAN	Inner	Outer
419856P	56 pc color bit set	69426292+	5586 4	12 24

56 PC COLOR QUICK CHANGE DRIVER BIT SET



- 48 pc 25 mm bit **S2**
- 3 mm x 2, 4 mm x 2, 6.5 mm x 2
 - #1 x 3, #2 x 3, #2R x 3, #3 x 3
 - #1 x 3, #2 x 3, #3 x 3
 - 3, 4, 5 mm
 - T-10 x 3, T-15 x 3, T-20 x 6, T-25 x 3, T-27, T-30, T-40
- 7 pc 75 mm bit **S2**
- #2R
 - T-15, T-20, T-25, T-30, T-40
 - #2
- 1 pc stainless steel quick change chuck

Item No.	Description	EAN	Inner	Outer
419857P	56 pc color bit set	69426292+	5586 4	12 24

29 PC COLOR QUICK CHANGE DRIVER BIT SET



- 21 pc 25 mm bit **S2**
- 3, 5.5 mm
 - #1, #2 x 2, #3
 - #1, #2 x 2, #3
 - 3, 4, 5, 6 mm
 - T-10, T-15, T-20, T-20, T-25, T-30, T-40
- 6 pc 50 mm bit **S2**
- 6.5 mm
 - #1, #2
 - #2
 - T-20, T-25
- 1 pc bit adaptor
- 1 pc stainless steel quick change chuck

Item No.	Description	EAN	Inner	Outer
419829P	29 pc color bit set	69426292+	5939 8	12 48

32 PC COLOR QUICK CHANGE DRIVER BIT SET



- 30 pc 25 mm bit **S2**
- 3, 4, 5.5, 6.5 mm
 - #0, #1 x 2, #2 x 2, #3 x 2
 - #0, #1 x 2, #2 x 2, #3 x 2
 - 3, 4, 5, 6 mm
 - T-10, T-15, T-20, T-20, T-25, T-25, T-30, T-40
- 1 pc bit adaptor
- 1 pc stainless steel quick change chuck

Item No.	Description	EAN	Inner	Outer
419832P	32 pc color bit set	69426292+	5585 7	12 48

IMPACT SCREWDRIVER BITS

- Extremely long lifetime**
Unique bit design and high tech multi-stage production process ensure unrivalled service life of bit
- Torsion zone**
UTorsion area absorbs torque peaks which reduces stress at the tip during heavy loading
- Exclusive material**
Specially modified material composition exclusively developed for MXMTORQ
- Save energy**
Bit design gives even power distribution, no energy wasted in heavy loading

28 PC IMPACT BIT SET



- 21 x 5.5, 6.5 mm
- #1, #2 x 5, #3
 - #1, #2 x 3, #3
 - T-15, T-20, T-25, T-25, T-25, T-30, T-40
- 1 x Adaptor
- 6 x Torx
- #2, #3
 - T-20, T-25
 - #2
 - #2

Item No.	Description	EAN	Inner	Outer
455828P	28 pc Impact Bit Set	69426292+	6736 2	12 48

3 PC QUICK-RELEASE HOLDER WITH CARABINER



- Quick release 1/4" Hex shank
- Carabiner for easy carry

Item No.	Description	EAN	Inner	Outer
453107	3 pc	69777135+	1786 3	24 48

31 PC IMPACT BIT SET



- 30 x 5.5, 6.5 mm
- #1, #2 x 6, #3 x 2
 - #1, #2 x 4, #3 x 2
 - T-15, T-20, T-25, T-25, T-25, T-30, T-40
 - #1, #2, #3
 - 4, 5, 6 mm
- 1 x Adaptor

Item No.	Description	EAN	Inner	Outer
455831P	31 pc Impact Bit Set	69426292+	6737 9	12 48

5 PC IMPACT BITS SET



- Absorb torque peaks reducing stress at the bit tip
- Outstanding durability
- Energy saving impact distribution

Item No.	Description	EAN	Inner	Outer
455805	5pc Impact Bits Set	69777135+	1628 6	24 48

36 PC IMPACT BIT SET



- 24 x 5.5, 6.5 mm
- #1, #2, #2, #2, #3
 - #1, #2, #2, #3
 - T-15, T-20, T-20, T-25, T-25, T-30, T-40
 - #1, #2, #3
 - 4, 5, 6 mm
- 6 x Torx
- #2, #3
 - #2
 - T-20, T-25
 - #2

- 2 x Adaptor
- 1 x Torx
- 2 x Torx
- 1 x Torx
- 7, 8 mm
- 1/4 in. Dr.

Item No.	Description	EAN	Inner	Outer
455836P	36 pc Impact Bit Set	69426292+	6738 6	6 24

5 PC BIT SETS - 50 mm (2 in.)



Item No.	Tip Type	Size	EAN 69426292+	Inner	Outer
450207	Slot	5 mm	4479 0	24	144
450209	Slot	6 mm	4480 6	24	144
450231	PH	#1	4481 3	24	144
450232	PH	#2	4482 0	24	144

10 PC BIT SETS - 50 mm (2 in.)



Item No.	Tip Type	Size	EAN 69426292+	Inner	Outer
450309	Slot	6 mm	4484 4	12	72
450331	PH	#1	4485 1	12	72
450332	PH	#2	4486 8	12	72

10 PC BIT SETS - 50 mm (2 in.)



Item No.	Tip Type	Size	EAN 69426292+	Inner	Outer
450917	PH	#2	3438 8	12	72

10 PC BIT SETS - 25 mm (1 in.)



Item No.	Tip Type	Size	EAN 69426292+	Inner	Outer
450005	Slot	4 mm	3088 5	24	144
450007	Slot	5 mm	3089 2	24	144
450009	Slot	6 mm	3090 8	24	144
450030	PH	#0	3091 5	24	144
450031	PH	#1	3092 2	24	144
450032	PH	#2	3093 9	24	144
450033	PH	#3	3828 7	24	144
450036	PZ	#1	4465 3	24	144
450037	PZ	#2	4466 0	24	144
450038	PZ	#3	4467 7	24	144
450042	TORX	T-10	5464 5	24	144
450043	TORX	T-15	2793 9	24	144
450044	TORX	T-20	2794 6	24	144
450045	TORX	T-25	2795 3	24	144
450047	TORX	T-30	5466 9	24	144
450048	TORX	T-40	5467 6	24	144

20 PC BIT SETS - 25 mm (1 in.)



Item No.	Tip Type	Size	EAN 69426292+	Inner	Outer
450105	Slot	4 mm	4468 4	12	72
450107	Slot	5 mm	4469 1	12	72
450109	Slot	6 mm	4470 7	12	72
450131	PH	#1	4472 1	12	72
450132	PH	#2	4473 8	12	72
450133	PH	#3	4474 5	12	72
450135	PZ	#0	4475 2	12	72
450136	PZ	#1	4476 9	12	72
450137	PZ	#2	4477 6	12	72
450138	PZ	#3	4478 3	12	72

20 PC BIT SETS - 25 mm (1 in.)



Item No.	Tip Type	Size	EAN 69426292+	Inner	Outer
450427	PZ	#2	3436 4	12	72



25 PC BIT SETS - 25 mm (1 in.)



Item No.	Tip Type	Size	EAN 69426292+	Inner	Outer
450162	PH	#2	5468 3	12	48
450167	PZ	#2	5470 6	12	48
450170	TORX	T-10	5472 0	12	48
450171	TORX	T-15	5473 7	12	48
450172	TORX	T-20	5474 4	12	48
450173	TORX	T-25	5475 1	12	48



QUICK CHANGE CHUCK



- Stainless steel, magnetic shaft holds bits securely



Item No.	Size	EAN 69426292+	Inner	Outer
453003	60 mm (2-3/8 in.)	3829 4	10	60

QUICK CHANGE CHUCK



- Stainless steel, magnetic shaft holds bits securely



Item No.	Size	EAN 69426292+	Inner	Outer
453005	60 mm (2-3/8 in.)	3830 0	20	120

QUICK CHANGE CHUCK



- Easy one-hand auto loading

Item No.	Size	EAN 69426292+	Inner	Outer
453007	65 mm (2-9/16 in.)	3830 0	10	60

SCREW GUIDE



- Stainless steel outer sleeve slides over the screw and keeps it straight while driving
- Magnetic shaft holds bits securely



Item No.	Size	EAN 69426292+	Inner	Outer
453020	80 mm (3-1/8 in.)	8423 9	10	60
453021	120 mm (4-3/4 in.)	3831 7	20	120

MAGNETIC EXTENSION



- One piece construction, stainless steel, magnetic shaft holds bits securely



Item No.	Size	EAN 69426292+	Inner	Outer
453041	60 mm (2-3/8 in.)	8479 6	10	60

MAGNETIC EXTENSION



- Stainless steel, magnetic shaft holds bits securely

Item No.	Size	EAN 69426292+	Inner	Outer
453042	60 mm (2-3/8 in.)	3832 4	20	120

MAGNETIC NUT DRIVER



Item No.	Size	Length	EAN 69426292+	Inner	Outer
453205	10 mm	48 mm (1-7/8 in.)	6773 7	20	120
453211	1/4 in.	48 mm (1-7/8 in.)	6774 4	20	120
453213	5/16 in.	48 mm (1-7/8 in.)	6775 1	20	120
453215	3/8 in.	48 mm (1-7/8 in.)	6776 8	20	120

3 PC POWER BIT SOCKET ADAPTOR



- 6.35 mm (1/4 in.) hex shank for using with quick chuck and extension
- Include hex to 1/4 in. Dr., hex to 3/8 in. Dr. and hex to 1/2 in. Dr.



Item No.	Size	EAN 69426292+	Inner	Outer
453063	1/4, 3/8, 1/2 in. Dr.	4803 3	10	60

5 PC QUICK-RELEASE HOLDER WITH CARABINER



- Quick release 1/4" Hex shank
- Suitable for hex-shank drill bits, screwdriver bits
- Aluminium alloy construction, lightweight design
- Carabiner for easy carry



Item No.	Size	EAN 69777135+	Inner	Outer
453105	5 pc	1627 9	24	48

KEYED DRILL CHUCK WITH CHUCK KEY



Item No.	Size	EAN	Inner	Outer
453111	1.5-10 mm 3/8-24UNF	69426292+	6	36
453112	1.5-13 mm 1/2-20UNF	8483 3	6	36

KEYED DRILL CHUCK WITH CHUCK KEY



Item No.	Size	EAN	Inner	Outer
453116	1.5-10 mm 3/8-24UNF	8484 0	6	36
453117	1.5-13 mm 1/2-20UNF	8485 7	6	36

DRILL CHUCK WITH SDS PLUS ADAPTER AND CHUCK KEY



- SDS and chuck adapter kit increases the usefulness of your rotary hammer

Item No.	Size	EAN	Inner	Outer
453122	1.5-10 mm 3/8-24UNF	8486 4	6	36
453123	1.5-13 mm 1/2-20UNF	8487 1	6	36

KEYED DRILL CHUCK WITH CHUCK KEY



Item No.	Size	EAN	Inner	Outer
453134	0.8-10 mm 3/8-24UNF	8488 8	6	36

CHUCK KEY



- For drill chucks

Item No.	Size	EAN	Inner	Outer
453101	6 mm	8480 2	12	72
453102	10 mm	8481 9	12	72
453103	13 mm	4914 6	12	72

ANGLE ADAPTER FOR DRILL



CR-V

- 90°
- 1/4 in. hex shank

Item No.	Size	EAN	Inner	Outer
453125	150 mm	5307 2	6	36



10 PC SANDING SHEETS



- Aluminum oxide, paper backed for general purpose sanding



Item No.	Size	Grit	EAN	Inner	Outer
446000	230 X 93 mm (9 X 3-5/8 in.)	50#	4108 9	10	100
446001	230 x 93 mm (9 x 3-5/8 in.)	80#	2580 5	10	100
446005	230 x 93 mm (9 x 3-5/8 in.)	120#	2582 9	10	100
446007	230 x 93 mm (9 x 3-5/8 in.)	180#	2583 6	10	100
446009	230 x 93 mm (9 x 3-5/8 in.)	240#	2584 3	10	100



10 PC SANDING SHEETS



- Aluminum oxide, paper backed for general purpose sanding



Item No.	Size	Grit	EAN	Inner	Outer
446043	230 X 93 mm (9 X 3-5/8 in.)	50#	3068 7	10	100
446045	230 x 93 mm (9 x 3-5/8 in.)	80#	3069 4	10	100
446047	230 x 93 mm (9 x 3-5/8 in.)	120#	3070 0	10	100
446049	230 x 93 mm (9 x 3-5/8 in.)	180#	3071 7	10	100
446051	230 x 93 mm (9 x 3-5/8 in.)	240#	3035 9	10	100

2 PC SANDING BELTS



- Heated aluminum oxide, cloth backed,
- For most hand-held belt sanders



Item No.	Size	Grit	EAN	Inner	Outer
446101	457 X 76 mm (18 X 3 in.)	36#	2585 0	10	60
446103	457 X 76 mm (18 X 3 in.)	50#	4109 6	10	60
446107	457 X 76 mm (18 X 3 in.)	80#	3971 0	10	60
446111	457 X 76 mm (18 X 3 in.)	120#	2586 7	10	60
446121	533 X 76 mm (21 X 3 in.)	36#	3072 4	10	60
446123	533 X 76 mm (21 X 3 in.)	50#	3073 1	10	60
446125	533 X 76 mm (21 X 3 in.)	80#	3074 8	10	60
446127	533 X 76 mm (21 X 3 in.)	120#	3075 5	10	60
446131	610 X 100 mm (24 X 4 in.)	36#	3076 2	10	60
446133	610 X 100 mm (24 X 4 in.)	50#	3077 9	10	60
446135	610 X 100 mm (24 X 4 in.)	80#	3036 6	10	60
446137	610 X 100 mm (24 X 4 in.)	120#	3037 3	10	60

SANDING ROLL



- Aluminum oxide, paper backed for general purpose sanding



Item No.	Size	Grit	EAN	Inner	Outer
446161	5m X 115 mm (16ft x 4-1/2 in.)	50#	3039 7	10	30
446163	5m X 115 mm (16ft x 4-1/2 in.)	80#	3040 3	10	30
446165	5m X 115 mm (16ft x 4-1/2 in.)	120#	3041 0	10	30
446167	5m X 115 mm (16ft x 4-1/2 in.)	240#	3042 7	10	30
446183	5m X 38 mm (16ft x 1-1/2 in.)	80#	5482 9	12	36
446185	5m X 38 mm (16ft x 1-1/2 in.)	120#	5483 6	12	36
446187	5m X 38 mm (16ft x 1-1/2 in.)	240#	5484 3	12	36

5 PC SANDING SHEETS



- Aluminum oxide, cloth backed
- For different applications



Item No.	Size	Grit	EAN	Inner	Outer
446211	280 X 230 mm (11 X 9 in.)	40#	4535 3	10	60
446213	280 X 230 mm (11 X 9 in.)	60#	4536 0	10	60
446215	280 X 230 mm (11 X 9 in.)	80#	4537 7	10	60
446217	280 X 230 mm (11 X 9 in.)	120#	4538 4	10	60
446219	280 X 230 mm (11 X 9 in.)	150#	4539 1	10	60

5 PC SANDING SHEETS



- Silicon carbide wet use, waterproof and oilproof
- For different applications



Item No.	Size	Grit	EAN	Inner	Outer
446221	280 X 230 mm (11 X 9 in.)	120#	3078 6	20	120
446223	280 X 230 mm (11 X 9 in.)	240#	3079 3	20	120
446225	280 X 230 mm (11 X 9 in.)	400#	3080 9	20	120
446227	280 X 230 mm (11 X 9 in.)	600#	3081 6	20	120
446229	280 X 230 mm (11 X 9 in.)	800#	3082 3	20	120
446231	280 X 230 mm (11 X 9 in.)	1200#	3083 0	20	120



10 PC SANDING SHEETS



- Aluminum oxide, use with tri-palm sanders, hook and loop backed



Item No.	Size	Grit	EAN	Inner	Outer
446300	140 X 95 mm (5-1/2 X 3-3/4 in.)	50#	4110 2	20	120
446301	140 X 95 mm (5-1/2 X 3-3/4 in.)	80#	2591 1	20	120
446303	140 X 95 mm (5-1/2 X 3-3/4 in.)	120#	2592 8	20	120
446305	140 X 95 mm (5-1/2 X 3-3/4 in.)	240#	4111 9	20	120

10 PC SANDING SHEETS



- Aluminum oxide, use with tri-base (detail) sanders, hook and loop backed



Item No.	Size	Grit	EAN	Inner	Outer
446400	93 X 93 mm (3-3/4 X 3-3/4 in.)	50#	4112 6	20	120
446401	93 X 93 mm (3-3/4 X 3-3/4 in.)	80#	2593 5	20	120
446403	93 X 93 mm (3-3/4 X 3-3/4 in.)	120#	2594 2	20	120
446407	93 X 93 mm (3-3/4 X 3-3/4 in.)	240#	2595 9	20	120

10 PC SANDING DISCS




- Aluminum oxide, hook and loop backed



Item No.	Size	Grit	EAN	Inner	Outer
446691	125 mm (5 in.)	50#	3038 0	20	120
446693	125 mm (5 in.)	80#	3044 1	20	120
446695	125 mm (5 in.)	120#	3052 6	20	120
446697	125 mm (5 in.)	240#	3053 3	20	120

10 PC SANDING DISCS

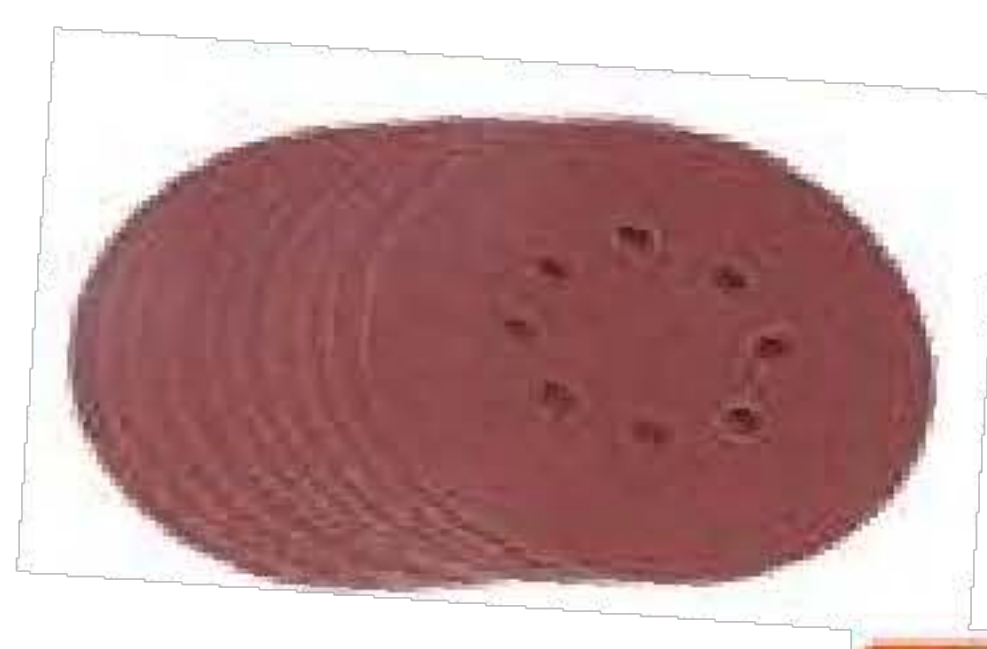


- Aluminum oxide, hook and loop backed



Item No.	Size	Grit	EAN	Inner	Outer
446701	125 mm (5 in.)	50#	A + 2600 0	20	120
446703	125 mm (5 in.)	80#	A + 2601 7	20	120
446705	125 mm (5 in.)	120#	A + 3957 4	20	120
446707	125 mm (5 in.)	240#	A + 3958 1	20	120
446709	125 mm (5 in.)	320#	B + 5111 6	20	120

10 PC SANDING DISCS

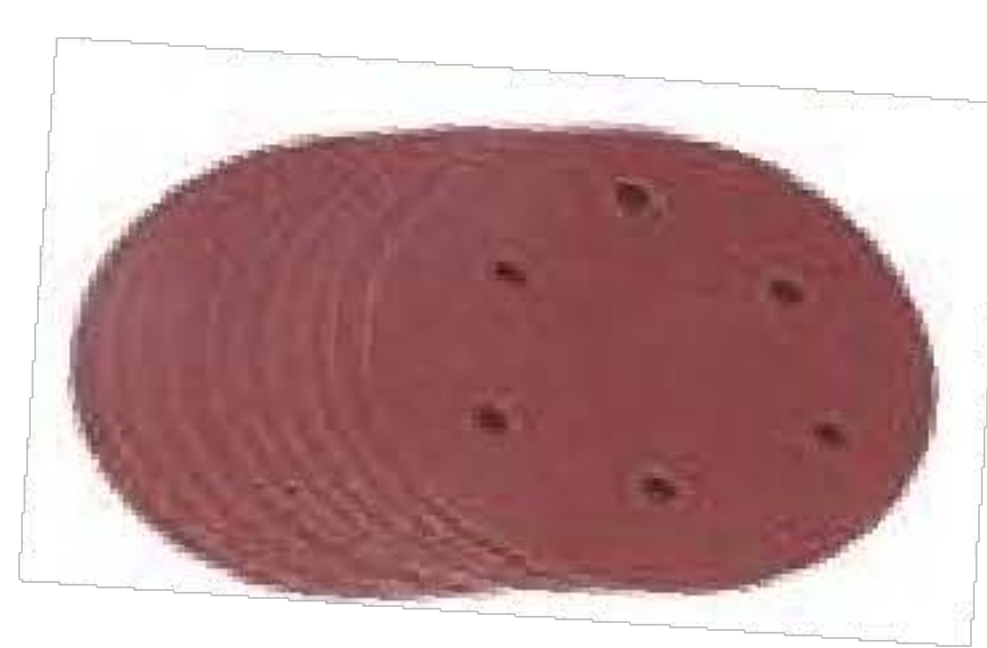


- Aluminum oxide, hook and loop backed



Item No.	Size	Grit	EAN	Inner	Outer
446711	150 mm (6 in.)	50#	3084 7	20	120
446715	150 mm (6 in.)	120#	3086 1	20	120
446721	150 mm (6 in.)	240#	3087 8	20	120

10 PC SANDING DISCS

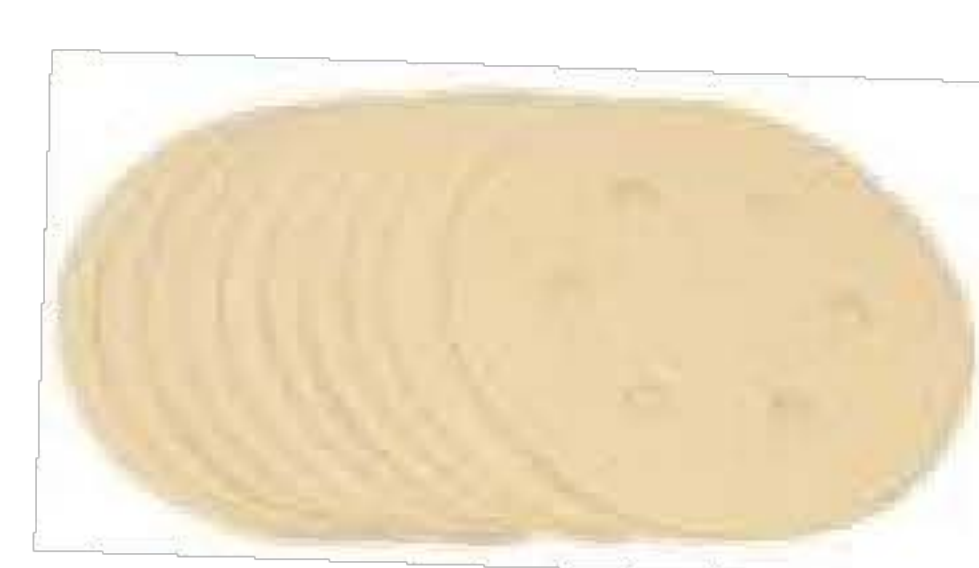

- Heated aluminium oxide, hook and loop backed
- Coated to reduce clogging
- For surface preparation in metal fabrication and automotive/boat refinishing workshops



Item No.	Size	Grit	EAN	Inner	Outer
446733	150 mm (6 in.)	80#	4526 1	20	120
446741	150 mm (6 in.)	320#	4528 5	20	120

10 PC SANDING DISCS



- 2 x 40#, 2 x 60#, 2 x 80#, 2 x 120#, 2 x 180#



Item No.	Size	EAN	Inner	Outer
446761	125 mm (5 in.)	1782 5	20	120

10 PC SANDING DISCS



- 2 x 40#, 2 x 60#, 2 x 80#, 2 x 120#, 2 x 180#



Item No.	Size	EAN	Inner	Outer
446767	125 mm (5 in.)	1783 2	20	120



BACKING PAD FOR DRILL



- With 6 mm shank



Item No.	Size	RPM	EAN	Inner	Outer
446779	125 mm (5 in.)	2000	5485 0	10	60

3 PC SANDING BLOCK



- Aluminum oxide
- For general purpose sanding
- #60, #120, #180



Item No.	Size	EAN	Inner	Outer
446753	3 pc	1784 9	0	36

6 PC SANDING BLOCK



- Aluminum oxide
- For general purpose sanding
- 2 x #60, 2 x #120, 2 x #240



Item No.	Size	EAN	Inner	Outer
446756	6 pc	1785 6	0	36


3 PC SANDING AND POLISHING SET



- 1pc 125 mm (5 in.) 80# sanding disc
- 1pc 125 mm (5 in.) lambswool polishing cap
- 1pc backing pad with 8mm round shank adaptor

Item No.	Size	EAN	Inner	Outer
446911	3 pc	5962 6	10	60

ARBOR FOR BUFFING WHEELS

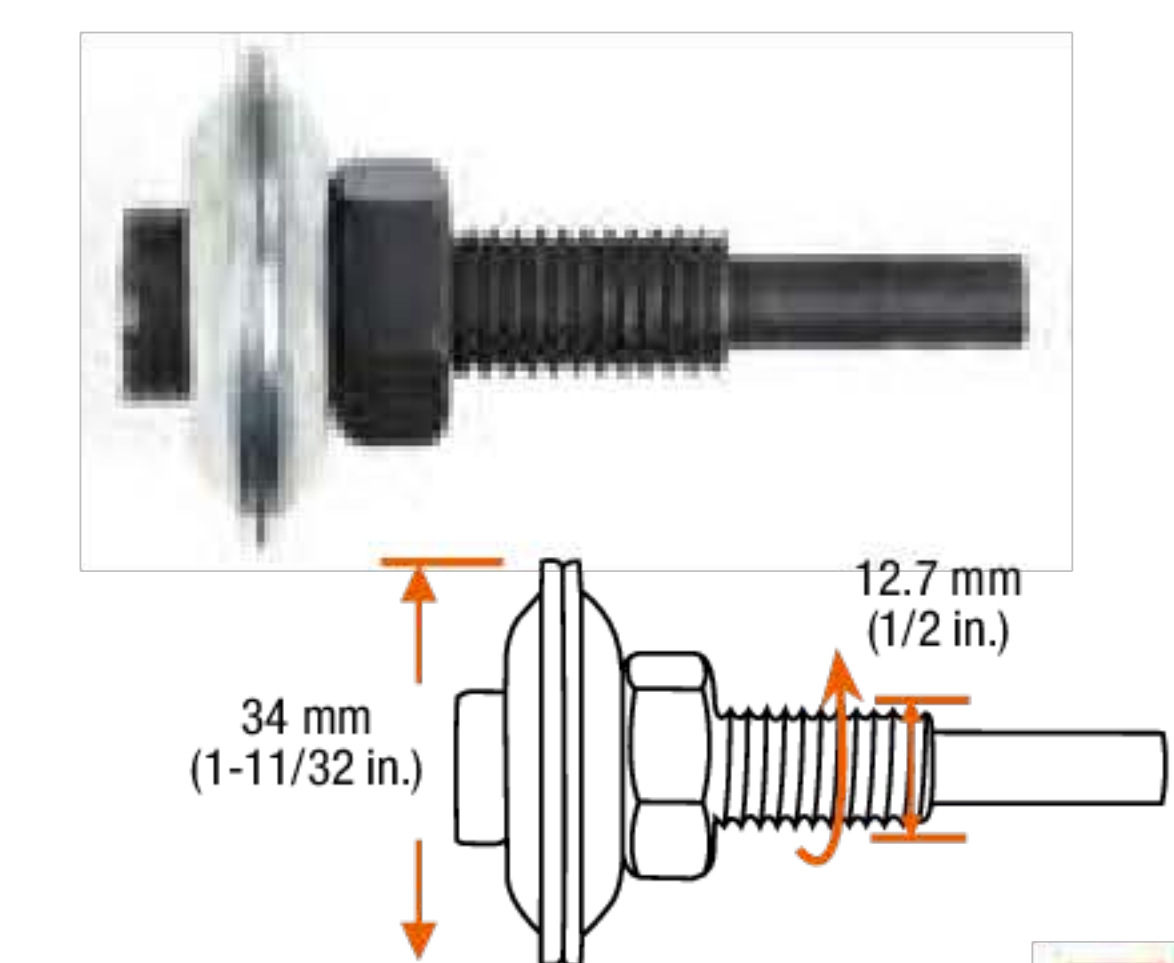

- For buffing wheels
- 12.7 mm (1/2 in.) Arbor
- 6 mm shank

Item No.	Size	EAN	Inner	Outer
446901	Arbor for Buffing Wheels	2606 2	12	144





FLAP DISC ALUMINUM OXIDE



NEW

- Aluminum Oxide
- Designed for grinding and finishing on low alloy steel

Ø 22 mm
(7/8 in.)

Item No.	Size	RPM	Grit	EAN 69777135+	Inner	Outer
446781AO	115×22 mm (4-1/2×7/8 in.)	13300	40#	1819 5	0	80
446783AO	115×22 mm (4-1/2×7/8 in.)	13300	60#	1820 1	0	80
446785AO	115×22 mm (4-1/2×7/8 in.)	13300	80#	1821 8	0	80
446797AO	125×22 mm (5×7/8 in.)	12200	40#	1822 5	0	80
446799AO	125×22 mm (5×7/8 in.)	12200	60#	1823 2	0	80
446801AO	125×22 mm (5×7/8 in.)	12200	80#	1824 9	0	80

FLAP DISC CALCINED ALUMINUM OXIDE



NEW

- Calcined Aluminum Oxide
- Perfect for grinding and finishing on low alloy steel
- High service life than Aluminum Oxide

Ø 22 mm
(7/8 in.)

Item No.	Size	RPM	Grit	EAN 69777135+	Inner	Outer
446781DA	115×22 mm (4-1/2×7/8 in.)	13300	40#	1825 6	0	80
446783DA	115×22 mm (4-1/2×7/8 in.)	13300	60#	1826 3	0	80
446785DA	115×22 mm (4-1/2×7/8 in.)	13300	80#	1827 0	0	80
446797DA	125×22 mm (5×7/8 in.)	12200	40#	1828 7	0	80
446799DA	125×22 mm (5×7/8 in.)	12200	60#	1829 4	0	80
446801DA	125×22 mm (5×7/8 in.)	12200	80#	1830 0	0	80

FLAP DISC ZIRCONIA



- Zirconia Oxide
- High stock removal applications
- Engineered for grinding and finishing on low alloy steel and stainless steel

Ø 22 mm
(7/8 in.)

Item No.	Size	RPM	Grit	EAN 69426292+	Inner	Outer
446781	115×22 mm (4-1/2×7/8 in.)	13300	40#	3065 6	12	72
446783	115×22 mm (4-1/2×7/8 in.)	13300	60#	3066 3	12	72
446785	115×22 mm (4-1/2×7/8 in.)	13300	80#	3067 0	12	72
446797	125×22 mm (5×7/8 in.)	12200	40#	5479 9	12	72
446799	125×22 mm (5×7/8 in.)	12200	60#	5480 5	12	72
446801	125×22 mm (5×7/8 in.)	12200	80#	2602 4	12	72

FLAP DISC CERAMIC



NEW

- Ceramic Grain
- High level of aggression for faster cutting and high removal rates
- Premium grinding and finishing for stainless steel and high alloy steel

Ø 22 mm
(7/8 in.)

Item No.	Size	RPM	Grit	EAN 69777135+	Inner	Outer
446781CA	115×22 mm (4-1/2×7/8 in.)	13300	40#	1831 7	0	80
446783CA	115×22 mm (4-1/2×7/8 in.)	13300	60#	1832 4	0	80
446785CA	115×22 mm (4-1/2×7/8 in.)	13300	80#	1833 1	0	80
446797CA	125×22 mm (5×7/8 in.)	12200	40#	1834 8	0	80
446799CA	125×22 mm (5×7/8 in.)	12200	60#	1835 5	0	80
446801CA	125×22 mm (5×7/8 in.)	12200	80#	1836 2	0	80

BACKING PAD VELCRO 50 mm QUICK CHUCK



- M14 Thread for grinding machine
- Round shank for PROTABLE drill
- Fit for all vepro back polishing accessories



Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446773	50 mm (2 in.)	4500	7044 7	10	60

BACKING PAD VELCRO 125 mm QUICK CHUCK



- M14 Thread for grinding machine
- Round shank for PROTABLE drill
- Fit for all vepro back polishing accessories



Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446775	125 mm (5 in.)	4500	7075 4	10	60

3 PC 75 mm (3 in.) SCRUB PAD VERY SOFT WHITE



- Window, Mirror, Furniture, Plastic

Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446843.3W	75 mm (3 in.)	4500	8941 8	10	60

3 PC 75 mm (3 in.) SCRUB PAD SOFT BLUE



- Shower, Bathroom, Glass, Tile, Floor

Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446843.3B	75 mm (3 in.)	4500	8942 5	10	60

3 PC 75 mm (3 in.) SCRUB PAD MEDIUM RED



- Cookware, Metal, Stainless Steel, Copper

Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446843.3R	75 mm (3 in.)	4500	8943 2	10	60

3 PC 125 mm (5 in.) SCRUB PAD VERY SOFT WHITE



- Window, Mirror, Furniture, Plastic

Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446845.3W	125 mm (5 in.)	4500	8944 9	10	60

3 PC 125 mm (5 in.) SCRUB PAD SOFT BLUE



- Shower, Bathroom, Glass, Tile, Floor

Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446845.3B	125 mm (5 in.)	4500	8945 6	10	60

3 PC 125 mm (5 in.) SCRUB PAD MEDIUM RED



- Cookware, Metal, Stainless Steel, Copper

Item No.	Size	RPM	EAN 69426292+	Inner	Outer
446845.3R	125 mm (5 in.)	4500	8946 3	10	60

BUFFING WHEEL



- For buffing jewelry, brass and other fine materials

Item No.	Size	RPM	EAN	Inner	Outer
446851	100 mm (4 in.)	5000	69426292+	2603 1	10 60

BUFFING WHEEL



- For buffing jewelry, brass and other fine materials

Item No.	Size	RPM	EAN	Inner	Outer
446855	150 mm (6 in.)	4000	69426292+	2605 5	6 48

POLISHING CAP



- Lambswool & cotton
- For fine surface polishing
- Hook and loop backed

Item No.	Size	RPM	EAN	Inner	Outer
446860	125 mm (5 in.)	2000	5486 7	20	120

POLISHING CUSHION-MEDIUM




- For fine surface polishing, with 6 mm shank

Item No.	Size	RPM	EAN	Inner	Outer
446897	125 mm (5 in.)	2000	5487 4	12	72

POLISHING SPONGE



Coarse Medium Fine

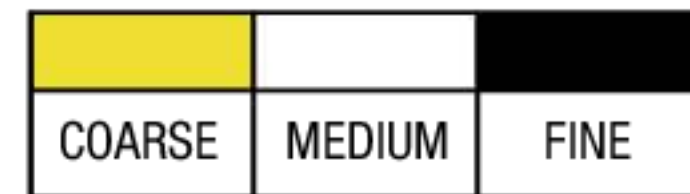

CUTTING LEVEL

2 PC POLISHING CAPS



- Lambswool & cotton
- For fine surface polishing

Item No.	Size	RPM	EAN	Inner	Outer
446861	180 mm (7 in.)	2000	3050 2	12	72
446865	240 mm (9-3/8 in.)	2000	3051 9	6	24

2 PC POLISHING CAPS



- Lambswool & cotton
- For fine surface polishing
- Hook and loop backed

Item No.	Size	RPM	EAN	Inner	Outer
446863	75 mm (3 in.)	2000	A + 7693 8	12	72
446866	127 mm (5 in.)	2000	A + 7694 5	12	72
446867	180 mm (7 in.)	2000	B + 5943 5	12	72

POLISHING CAP



- Lambswool
- For fine surface polishing

Item No.	Size	RPM	EAN	Inner	Outer
446869	180 mm (7 in.)	2000	6016 5	0	50



- Hook and loop backed



POLISHING SPONGE-COARSE



Item No.	Size	RPM	EAN	Inner	Outer
446881	150 mm (6 in.) - Coarse	4600	4532 2	6	24

POLISHING SPONGE-MEDIUM



Item No.	Size	RPM	EAN	Inner	Outer
446883	150 mm (6 in.) - Medium	4600	4533 9	6	24

POLISHING SPONGE-FINE



Item No.	Size	RPM	EAN	Inner	Outer
446885	150 mm (6 in.) - Fine	4600	4534 6	6	24



WIRE BRUSH - POWER DRILL



WIRE MATERIAL

STEEL WIRE

STAINLESS STEEL WIRE

BRASS WIRE






(Prevents spark from producing during polishing process)

NYLON WIRE

WORKING SURFACE



★★ Recommended ★ Acceptable

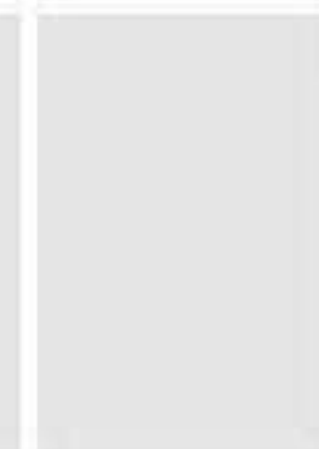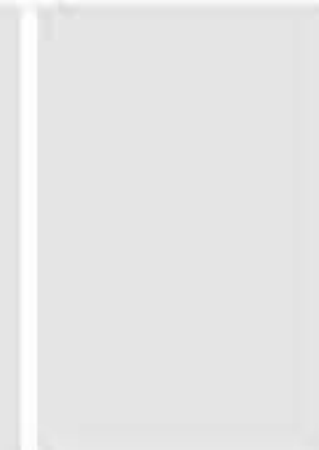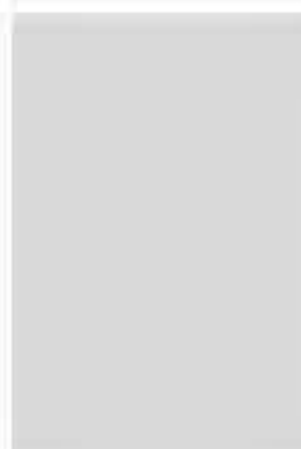

CRIMPED WIRE WHEEL BRUSH



- 0.3 mm steel wire, 6 mm round shank
- Ideal for removing coating,rust, scale and weld splatter in hard to reach spaces.
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447305	50 mm (2 in.)	4500	69426292 (A) 69708346 (B)	6	36
447306	60 mm (2-3/8 in.)	4500	B + 7668 6	6	36
447307	75 mm (3 in.)	4500	A + 3060 1	6	36
447309	100 mm (4 in.)	4500	A + 3061 8	6	36

CRIMPED WIRE WHEEL BRUSH
-STAINLESS STEEL WIRE



- 0.3 mm stainless steel wire, 6mm round shank
- Ideal for removing coating,rust, scale and weld splatter in hard to reach spaces.
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447335	50 mm (2 in.)	4500	69708346+	6	36
447337	75 mm (3 in.)	4500	7676 1	6	36
447339	100 mm (4 in.)	4500	7677 8	6	36

CRIMPED WIRE WHEEL BRUSH
-BRASS WIRE



- 0.3 mm brass wire, 6mm round shank
- Ideal for removing coating,rust, scale and weld splatter in hard to reach spaces.
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447318	75 mm (3 in.)	4500	69708346+	6	36

CRIMPED WIRE CUP BRUSH



- 0.3 mm steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter on flat surfaces
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447325	50 mm (2 in.)	4500	69426292+ 69708346+	6	36
447327	75 mm (3 in.)	4500	3063 2	6	36

CRIMPED WIRE CUP BRUSH
-STAINLESS STEEL WIRE



- 0.3 mm stainless steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter on flat surfaces
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447329	50 mm (2 in.)	4500	69708346+	6	36

CRIMPED WIRE CUP BRUSH
-BRASS WIRE



- 0.3 mm brass wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter on flat surfaces
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447328	50 mm (2 in.)	4500	69708346+	6	36

CRIMPED WIRE END BRUSH



- 0.3 mm steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter in hard to reach spaces
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447322	12 mm (1/2 in.)	4500	69426292 (A) 69708346 (B)	12	72
447323	25 mm (1 in.)	4500	B + 7671 6 A + 4863 7	12	72

CRIMPED WIRE END BRUSH
-STAINLESS STEEL WIRE



- 0.3 mm stainless steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter in hard to reach spaces
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447331	25 mm (1 in.)	4500	69708346+	12	72

CRIMPED WIRE END BRUSH
-BRASS WIRE



- 0.3 mm brass wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter in hard to reach spaces
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447324	25 mm (1 in.)	4500	69708346+	12	72

NYLON WIRE WHEEL BRUSH



- #80 durable abrasive nylon wire,6 mm round shank
- Ideal for spot and corner surface preparation on metal, PVC and wood.
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447805	75 mm (3 in.)	4500	69708346+	6	36

KNOTTED WIRE WHEEL BRUSH



- 0.5 mm hardened steel wire, 6 mm round shank
- Twist knotted wire design provides less flexibility for heavy duty brushing action
- Ideal for bead weld preparation and confined areas
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447601	75 mm (3 in.)	20000	69708346+	6	36

ABRASIVE TUBE BRUSH



- 0.3 mm steel wire, 8 mm round shank
- Ideal for cleaning, deburring and polishing of cylinders, tubes, pipes and bores,etc
- Use with portable drills or manually

Item No.	Size	EAN	Inner	Outer
447694	15 mm (5/8 in.)	69743345 (A) 69708346 (B)	A + 5271 6	10 60
447701	20 mm (3/4 in.)	B + 7694 6	12 48	
447703	22 mm (7/8 in.)	B + 7685 3	12 48	
447705	30 mm (1-1/8 in.)	B + 7686 0	12 48	
447707	35 mm (1-3/8 in.)	B + 7687 7	12 48	

NYLON WIRE CUP BRUSH



- #80 durable abrasive nylon wire,6 mm round shank
- Ideal for flat surface preparation on metal, PVC and wood.
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447803	50 mm (2 in.)	4500	69708346+	6	36

3 PC WIRE BRUSH SET-BRASS COATED STEEL WIRE



- 0.3 mm steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter
- Use with portable and stationary drills
- 1 pc 25 mm wire end brush • 1 pc 50 mm wire cup brush
- 1 pc 50 mm wire wheel brush

Item No.	Size	RPM	EAN	Inner	Outer
447203	3 pc	4500	69708346+	10	60

5 PC WIRE BRUSH SET-BRASS COATED STEEL WIRE



- 0.3 mm steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter
- Use with portable and stationary drills
- 1 pc 25 mm wire end brush • 1 pc 50 mm wire cup brush
- 1 pc 75 mm wire cup brush • 1 pc 50 mm wire wheel brush
- 1 pc 75 mm wire wheel brush

Item No.	Size	RPM	EAN	Inner	Outer
447205	5 pc	4500	7659 4	10	40

NYLON WIRE END BRUSH



- #80 durable abrasive nylon wire,6 mm round shank
- Ideal for tight and narrow surface preparation on metal,PVC and wood.
- Use with portable and stationary drills

Item No.	Size	RPM	EAN	Inner	Outer
447801	25 mm (1 in.)	4500	7688 4	12	72

4 PC WIRE BRUSH SET



- 0.3 mm steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter
- 1 pc 250 mm knife brush • 1 pc 25 mm wire end brush
- 1 pc 50 mm wire cup brush
- 1 pc 50 mm wire wheel brush

Item No.	Size	RPM	EAN	Inner	Outer
447204	4 pc	4500	7658 7	10	40

4 PC WIRE BRUSH SET



- 0.3 mm steel wire, 6 mm round shank
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating,rust, scale and weld splatter
- 1 pc 28mm tube brush • 1 pc 25 mm wire end brush
- 1 pc 75 mm wire cup brush
- 1 pc 75 mm wire wheel brush

Item No.	Size	RPM	EAN	Inner	Outer
447206	4 pc	4500	5270 9	10	40



WIRE BRUSH
- ANGLE GRINDER



CRIMPED WIRE CUP BRUSH



- 0.3 mm steel wire, M14 x 2 thread
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating, rust, scale and weld splatter on flat surfaces
- Use with angle grinders

Item No.	Size	RPM	EAN	69426292 (A) 69708346 (B)	Inner	Outer
447223	65 mm (2-1/2 in.)	12500	B + 7660 0	0	36	
447225	75 mm (3 in.)	12500	A + 3058 8	0	36	
447227	100 mm (4 in.)	8500	A + 4859 0	0	24	
447229	125 mm (5 in.)	6500	B + 7661 7	0	24	

CRIMPED WIRE CUP BRUSH
- STAINLESS STEEL WIRE



- 0.3 mm stainless steel wire, M14 x 2 thread
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating, rust, scale and weld splatter on flat surfaces
- Use with angle grinders

Item No.	Size	RPM	EAN	69708346+	Inner	Outer
447253	60 mm (2-3/8 in.)	12500	7664 8	0	36	
447255	75 mm (3 in.)	12500	7665 5	0	36	
447257	100 mm (4 in.)	8500	7666 2	0	36	

KNOTTED WIRE CUP BRUSH



- 0.5 mm hardened steel wire, M14 x 2 thread
- Twist knotted wire design provides less flexibility for heavy duty brushing action
- Ideal for removing coating, rust, scale and weld splatter on flat surfaces
- Use with angle grinders

Item No.	Size	RPM	EAN	69426292 (A) 69708346 (B)	Inner	Outer
447243	65 mm (2-1/2 in.)	12500	B + 7663 1	0	36	
447245	75 mm (3 in.)	12500	A + 4860 6	0	36	
447247	100 mm (4 in.)	8500	A + 4861 3	0	24	

CRIMPED WIRE CUP BRUSH
- BRASS WIRE



- 0.3 mm brass wire, M14 x 2 thread
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for removing coating, rust, scale and weld splatter on flat surfaces
- Use with angle grinders

Item No.	Size	RPM	EAN	69708346+	Inner	Outer
447435	60 mm (2-3/8 in.)	12500	7884 0	0	36	
447437	75 mm (3 in.)	12500	7681 5	0	36	
447439	100 mm (4 in.)	8500	7885 7	0	24	

KNOTTED WIRE WHEEL BRUSH



- 0.5 mm hardened steel wire, M14 x 2 thread
- Twist knotted wire design provides less flexibility for heavy duty brushing action
- Ideal for bead weld preparation and confined areas
- Use with angle grinders

Item No.	Size	RPM	EAN	69426292 (A) 69708346 (B)	Inner	Outer
447264	100 mm (4 in.)	12500	A + 4862 0	0	36	
447265	125 mm (5 in.)	10000	B + 7667 9	0	36	

CRIMPED WIRE BEVEL BRUSH



- 0.3 mm steel wire, M14 x 2 thread
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for grooves, curves and corners, and for efficient action on irregular objects
- Use with angle grinders

Item No.	Size	RPM	EAN	69708346+	Inner	Outer
447603	100 mm (4 in.)	12500	7683 9	0	24	

BENCH GRINDER BRUSHES



- 0.3 mm steel wire, 32 mm round bore
- Crimped wire design provides flexibility for light to medium duty brushing action
- Use with bench grinders

Item No.	Size	RPM	EAN	69708346+	Inner	Outer
447401	150 x 25 x 32 mm	6000	7678 5	6	24	
447403	180 x 25 x 32 mm	6000	7679 2	4	12	
447405	200 x 25 x 32 mm	4500	7680 8	4	12	

CRIMPED WIRE WHEEL BRUSH - COATED BRASS WIRE



- 0.3 mm steel wire, M14 x 2 thread
- Crimped wire design provides flexibility for light to medium duty brushing action
- Ideal for bead weld preparation and confined areas
- Use with angle grinders

Item No.	Size	RPM	EAN	69743345+	Inner	Outer
447268	115 mm (4-1/2 in.)	12500	5272 3	0	36	

FLAP DISC



- For use with portable power drills
- For use on flat or contoured surfaces of wood, metal, plastic, rubber, stone etc.
- 6 mm shank

Item No.	Size	RPM	Grit	EAN	Inner	Outer
446811	50 x 20 mm (2 x 3/4 in.)	12500	40#	69426292+	3047 2	12 72
446813	50 x 20 mm (2 x 3/4 in.)	12500	80#	3048 9	12 72	
446815	50 x 20 mm (2 x 3/4 in.)	12500	180#	3049 6	12 72	

3 PC ROTARY RASP SET



HCS

- Made of high carbon steel
- For wood polishing

Item No.	Description	EAN	Inner	Outer
447121	3 pc Rotary Rasp Set	69426292+	3826 3	20 120

CLEAN & STRIP DISC



- Made of intertwined nylon woven cord with polyurethane coating
- Ideal for preparation and cleaning of welds, rust removal and removal of discoloration
- 6 mm shank

Item No.	Size	RPM	EAN	Inner	Outer
446953	100 mm (4 in.) with Arbor	6000	69426292+	2607 9	6 48

5 PC MOUNTED STONE SET



- 6 mm shank diameter
- For use on most metals

RPM 18000

Item No.	Description	EAN	Inner	Outer
447125	5 pc Mounted Stone Set	69426292+	4915 3	12 72

3 PC ROTARY FILE SET



HSS

- Made of high speed steel
- For steel polishing

Item No.	Description	EAN	Inner	Outer
447123	3 pc Mounted Stone Set	69426292+	3827 0	20 120

CLEAN & STRIP DISC



- Made of intertwined nylon woven cord with polyurethane coating
- Ideal for preparation and cleaning of welds, rust removal and removal of discoloration

Item No.	Size	RPM	EAN	Inner	Outer
446955	100 mm (4 in.) with Arbor	6000	69426292+	2608 6	10 60

72 PC ROTARY ACCESSORY SET



- Includes grinding points, polishing wheels, cutter/milling points, grinding wheels, cutting wheels, sanding drums, HSS drill bits and brush wheels

Item No.	Description	EAN	Inner	Outer
447040	72 pc Rotary Accessory Set	69426292+	3056 4	6 24



CLEAN & STRIP DISC



- Use with angle grinders
- Made of intertwined nylon woven cord with polyurethane coating
- Ideal for preparation and cleaning of welds, rust removal and removal of discoloration

Item No.	Size	RPM	EAN	Inner	Outer
446957	100 mm (4 in.) - 16 mm bore	6000	69426292+	2609 3	10 60
446958	100 mm (4 in.) - 22 mm bore	6000	6283 1	10 60	

50 mm (2 in.) DRILL BRUSH YELLOW PE



- For cleaning Bathroom, Tile, Kitchen

1/4 in.

Item No.	Size	EAN	Inner	Outer
447502	50 mm (2 in.)	69426292+	5972 5	6 36

50 mm (2 in.) DRILL BRUSH WHITE PE SOFT WHITE



- For cleaning Glass, Furniture, Automobile

1/4 in.

Item No.	Size	EAN	Inner	Outer
447502W	50 mm (2 in.)	8938 8	6 36	

100 mm (4 in.) DRILL BRUSH YELLOW PE



- For cleaning Bathroom, Tile, Kitchen

1/4 in.

Item No.	Size	EAN	Inner	Outer
447504	100 mm (4 in.)	6361 6	6 24	

100 mm (4 in.) DRILL BRUSH WHITE PE SOFT WHITE



- For cleaning Glass, Furniture, Automobile

1/4 in.

Item No.	Size	EAN	Inner	Outer
447504W	100 mm (4 in.)	8939 5	6 24	

63 mm (2-1/2 in.) DRILL BRUSH YELLOW PE



- For cleaning Bathroom, Tile, Kitchen

1/4 in.

Item No.	Size	EAN	Inner	Outer
447507	63 mm (2-1/2 in.)	7043 0	6 36	

63 mm (2-1/2 in.) DRILL BRUSH WHITE PE Brush SOFT WHITE



- For cleaning Glass, Furniture, Automobile

1/4 in.

Item No.	Size	EAN	Inner	Outer
447507W	63 mm (2-1/2 in.)	8940 1	6 36	

3 PC DRILL BRUSH SET - HARD WIRES



- 1 pc 84mm dome brush
- 1 pc 50mm wheel brush
- 1 pc 100mm wheel brush
- For cleaning Bathroom, tile, kitchen

Item No.	Size	EAN	Inner	Outer
447303	3 pc	5332 4	6 24	

3 PC DRILL BRUSH SET - SOFT WIRES



- 1 pc 84 mm dome brush
- 1 pc 50 mm wheel brush
- 1 pc 100 mm wheel brush
- For cleaning Glass, Furniture, Automobile

Item No.	Size	EAN	Inner	Outer
447303W	3 pc	1620 0	6 24	



WELDING ACCESSORIES & CONSUMABLES



MIG TORCH CONTACT TIP BINZEL

MIG

- Bronze material
- Binzel type replacement tips for MIG welders using (Binzel type) torches

Item No.	Size	Qty	EAN 69708346+	Inner	Outer
591001	0.6 mm	5 pc	7534 4	12	144
591002	0.8 mm	5 pc	7535 1	12	144
591003	0.9 mm	5 pc	7536 8	12	144

MIG TORCH CONTACT TIP TWECO

MIG

- Bronze material
- Tweco type replacement tips for MIG welders using (Tweco type) torches

Item No.	Size	Qty	EAN 69708346+	Inner	Outer
591004	0.6 mm	5 pc	7537 5	12	144
591005	0.8 mm	5 pc	7538 2	12	144
591006	0.9 mm	5 pc	7539 9	12	144

OXY FLINT LIGHTER

- Cup type lighter allows for fast, easy ignition. Replaceable flint.

Item No.	Size	Qty	EAN 69708346+	Inner	Outer
591007	193 mm	1 pc	7540 5	6	48

OXY TIP CLEANING SET

- Contents: 13pc tip cleaning set: 6, 7, 8, 10, 12, 14, 15, 16, 17, 18, 22, 24, 26 mm; 1pc mini file
- Removes carbon build up and keep tips clean

Item No.	Size	Qty	EAN 69708346+	Inner	Outer
591009	75 mm	14 pc	7542 9	12	144

OXY TIP CLEANING SET

- Contents: 12pc tip cleaning set: 7, 8, 10, 12, 14, 15, 16, 17, 18, 22, 24, 25 mm; 1pc mini file
- Removes carbon build up and loose slag

Item No.	Size	Qty	EAN 69708346+	Inner	Outer
591010	100 mm	13 pc	7543 6	6	96

REPLACEMENT OXY FLINTS

- Replacement flints for Tactix flint lighter 591007.

Item No.	Size	Qty	EAN 69708346+	Inner	Outer
591008	12 mm	10 pc	7541 2	12	144

ELECTRODE HOLDER

300 AMP

- Brass plated mouth
- Fully insulated

Item No.	Amperage	Electrode diameter	Qty	EAN 69708346+	Inner	Outer
591011	300 AMP	6.4 mm max.	1 pc	7544 3	6	36

ELECTRODE HOLDER

500 AMP

- Brass mouth (long working life)
- Fully insulated

Item No.	Amperage	Electrode diameter	Qty	EAN 69708346+	Inner	Outer
591012	500 AMP	9.0 mm max.	1 pc	7545 0	6	36

ELECTRODE HOLDER

300 AMP

- Brass mouth (long working life)
- Fully insulated

Item No.	Amperage	Electrode diameter	Qty	EAN 69708346+	Inner	Outer
591014	300 AMP	6.4 mm max.	1 pc	7547 4	6	36

ELECTRODE HOLDER

500 AMP

- Brass plated mouth
- Fully insulated

Item No.	Amperage	Electrode diameter	Qty	EAN 69708346+	Inner	Outer
591015	500 AMP	9.0 mm max.	1 pc	7548 1	6	36

ELECTRODE HOLDER

300 AMP

- Brass plated mouth
- Fully insulated

Item No.	Amperage	Electrode diameter	Qty	EAN 69708346+	Inner	Outer
591013	300AMP	6.4 mm max.	1 pc	7546 7	6	36

ELECTRODE HOLDER

500 AMP

- Brass mouth (long working life)
- Fully insulated

Item No.	Amperage	Electrode diameter	Qty	EAN 69708346+	Inner	Outer
591016	500AMP	9.0 mm max.	1 pc	7549 8	6	36

EARTH CLAMP


300 AMP

- Brass plated clamp mouth
- Replacement Earth Clamp to fit most welding machines

Item No.	Amperage	Qty	EAN	Inner	Outer
591017	300 AMP	1 pc	7550 4	6	36

EARTH CLAMP


500 AMP


- Brass plated clamp mouth
- Replacement Earth Clamp to fit most welding machines

Item No.	Amperage	Qty	EAN	Inner	Outer
591041	500 AMP	1 pc	7017 2	6	36



GAS SHIELDED WELDING PLIERS

1. Wire drawing out
2. Tip removal and installation
3. Hammering
4. Wire cutting
5. Spring loaded for easy opening and closing
6. Nozzle removal and installation
7. Insulation bushing removal and installation

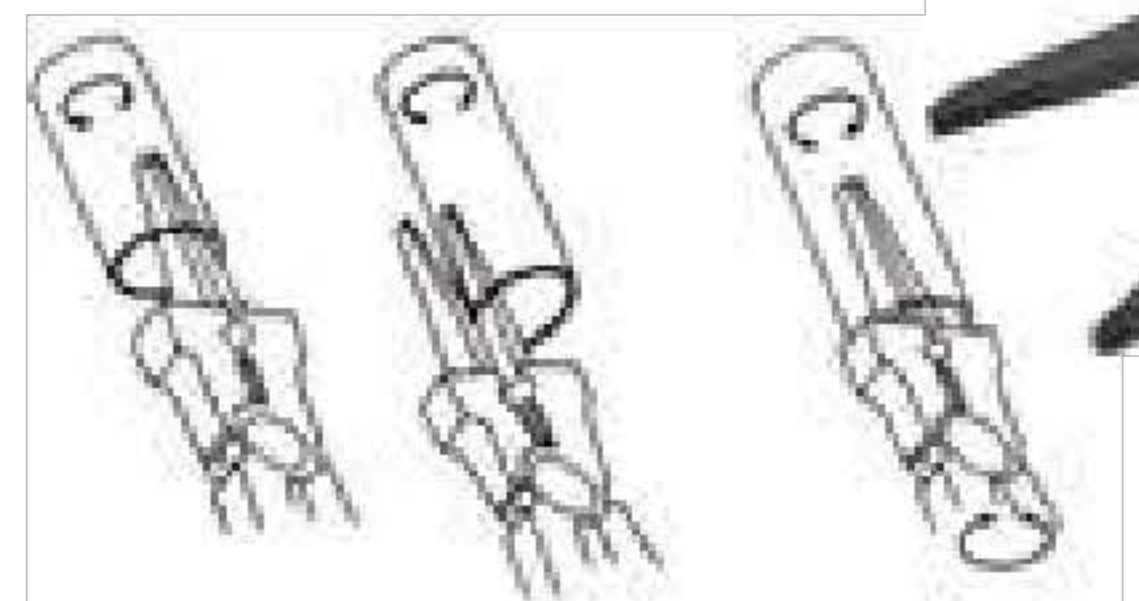

Spatter removal from inside and outside the nozzle

Spatter removal from the nozzle end



Item No.	Size	Qty	EAN	Inner	Outer
591021	215 mm	1 pc	7554 2	6	36


CHIPPING HAMMER



- Dual head / Spring handle

Item No.	Size	Qty	EAN	Inner	Outer
591019	500 g	1 pc	7552 8	6	24

WELDING TROLLEY

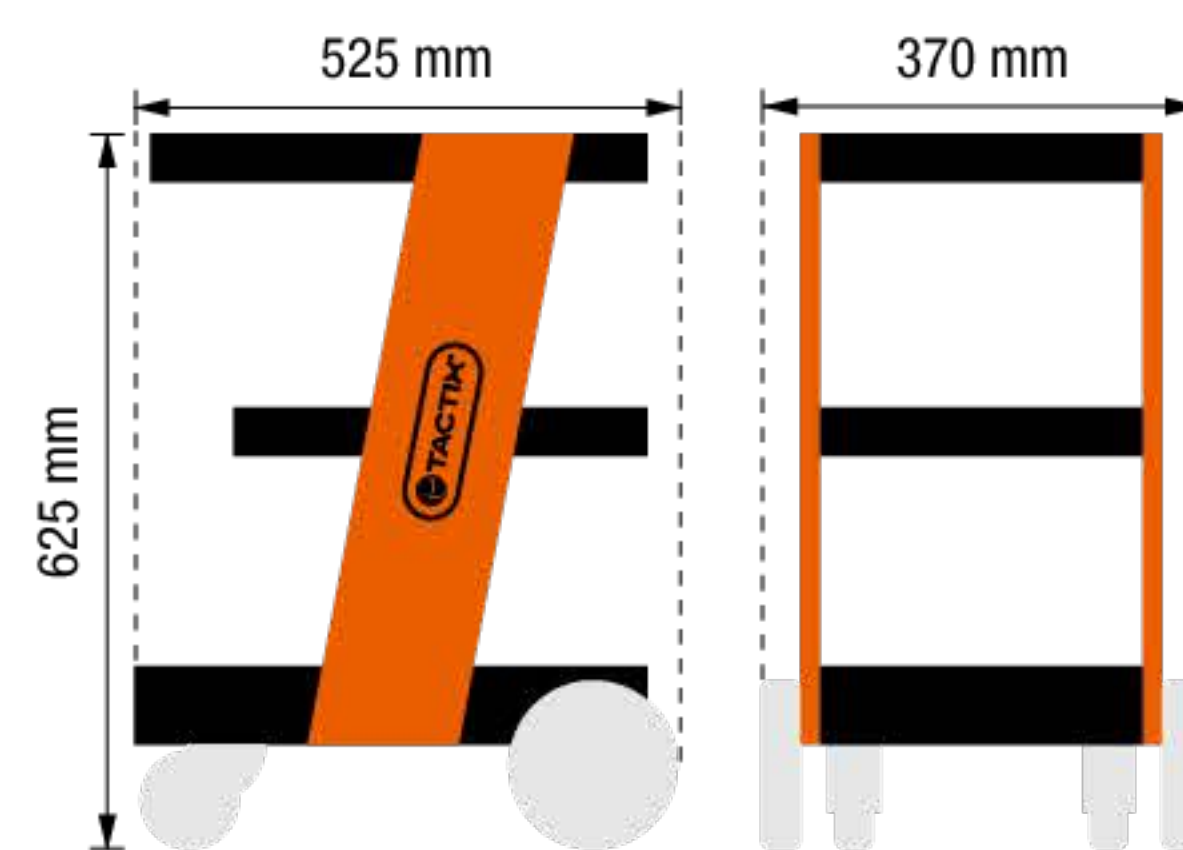

- Sturdy all metal construction
- 50 kg capacity
- Front caster wheels for easy maneuverability
- Built in tool storage
- Built in cable holders

Item No.	Hight	Length	Width	Qty	EAN	Inner	Outer
591018	625 mm	370 mm	525 mm	1 pc	7551 1	0	1


ELECTRODE STORAGE HOLDER



- Max Temperature: 120°C
- Protects from moisture
- Avoid flux chipping

Item No.	Capacity	Electrode Length	Qty	EAN	Inner	Outer
591023	4,5 kg	350 mm	1 pc	7556 6	0	10

4 METRE TIG TORCH & CABLE

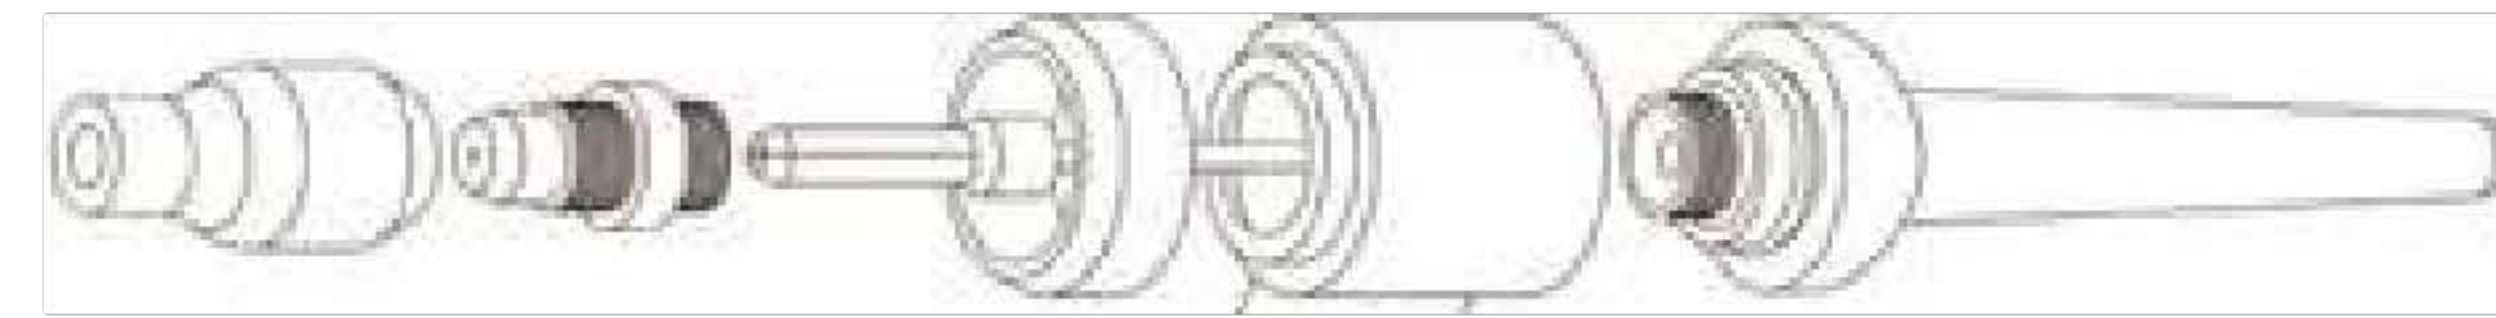
TIG

- Rating:150A DC, 120A AC
- Duty cycle:60%
- Electrodes:0.5-2.4mm

Item No.	Description	EAN	Inner	Outer
591022	4 Metre TIG Torch & Cable	7555 9	0	5

4 PC TIG TORCH ACCESSORY SET


TIG

- Contents:
1pc long back cap
1pc collet body
1pc collet
1pc ceramic nozzle

Item No.	Qty	EAN	Inner	Outer
591024	4 pc	7557 3	12	144



MIG TORCH GAS NOZZEL


MIG

- Binzel type replacement tips for MIG welders using (Binzel type) torches

Item No.	Size	Qty	EAN	Inner	Outer
591020	12 mm	1 pc	7553 5	12	144

GAS DIFUSER MIG BINZEL


MIG

- Brass material
- Binzel type
- Suitable for use with MIG welders

Item No.	Qty	EAN	Inner	Outer
591025	1 pc	7558 0	12	144

GAS DIFUSER MIG TWECO


MIG

- Brass material
- Tweco type
- Suitable for use with MIG welders

Item No.	Qty	EAN	Inner	Outer
591032	1pc	5512 0	12	144

TEFLON MIG LINER


MIG

- Binzel type
- Size: 0.8 mm to 1.0 mm
- Replaceable liner for aluminium welding
- Can be used with MIG wires

Item No.	Size	Qty	EAN	Inner	Outer
591026	3.3 m	1pc	7559 7	12	24

WIRE BRUSH



- Steel wire
- 4 x 18 wires
- Used to clean for welding

Item No.	Size	Qty	EAN	Inner	Outer
724003	175 mm (7 in.)	1 pc	3337 4	6	24

WOOD HANDLE WIRE BRUSH



- Steel wire
- 4 x 16 wires
- Used to clean for welding

Item No.	Size	Qty	EAN	Inner	Outer
724104	280 mm (11 in.)	1 pc	3338 1	12	48

MAGNETIC WELDING HOLDER



• 45°, 90°, 135°

Item No.	Size	Pull Force	Qty	EAN	Inner	Outer
591027	76 mm (3 in.)	11 kg (25 lbs.)	1 pc	7561 0	10	60

MAGNETIC WELDING HOLDER



• 45°, 90°, 135°

Item No.	Size	Pull Force	Qty	EAN	Inner	Outer
591028	100 mm (4 in.)	22 kg (50 lbs.)	1 pc	7562 7	6	36

MAGNETIC WELDING HOLDER



• 45°, 90°, 135°

Item No.	Size	Pull Force	Qty	EAN	Inner	Outer
591029	125 mm (5 in.)	33 kg (75 lbs.)	1 pc	7563 4	6	24

MAGNETIC WELDING HOLDER



• 45°, 90°, 135°

Item No.	Size	Pull Force	Qty	EAN	Inner	Outer
591030	150 mm (6 in.)	44 kg (100 lbs.)	1 pc	7564 1	6	12

4PCS MINI MAGNETIC WELDING HOLDERS



• 45°, 90°, 135°

Item No.	Size	Pull Force	Qty	EAN	Inner	Outer
591031	60 x 50 mm (2-3/8 x 2 in.)	4 kg (9 lbs.)	4 pc	7565 8	10	40



AUTOMATIC WELDING GOGGLE



- Light State: DIN4
- Dark State: DIN5~DIN9/DIN9~DIN13
- Switching Time: 3/10000S=20%
- Delay Time: 0.1S~1.0S
- Power Supply: Lithium battery
- Suitable for Welding, Cutting, Grinding
- Conforms to CE EN ISO 16321



Suitable for Welding, Cutting, Grinding




Item No.	Size	Qty	EAN	Inner	Outer
480501		1 pc	1642 2	6	12

WELDING SCREEN



- Welding screen used to reduce glare and protect welders
- Specially formulated vinyl 16mil (0.4 mm) thick
- Certified UV resistant and flame retardant
- Kevlar stitching
- Edges with eyelets at 300 mm intervals
- Welding frame not included

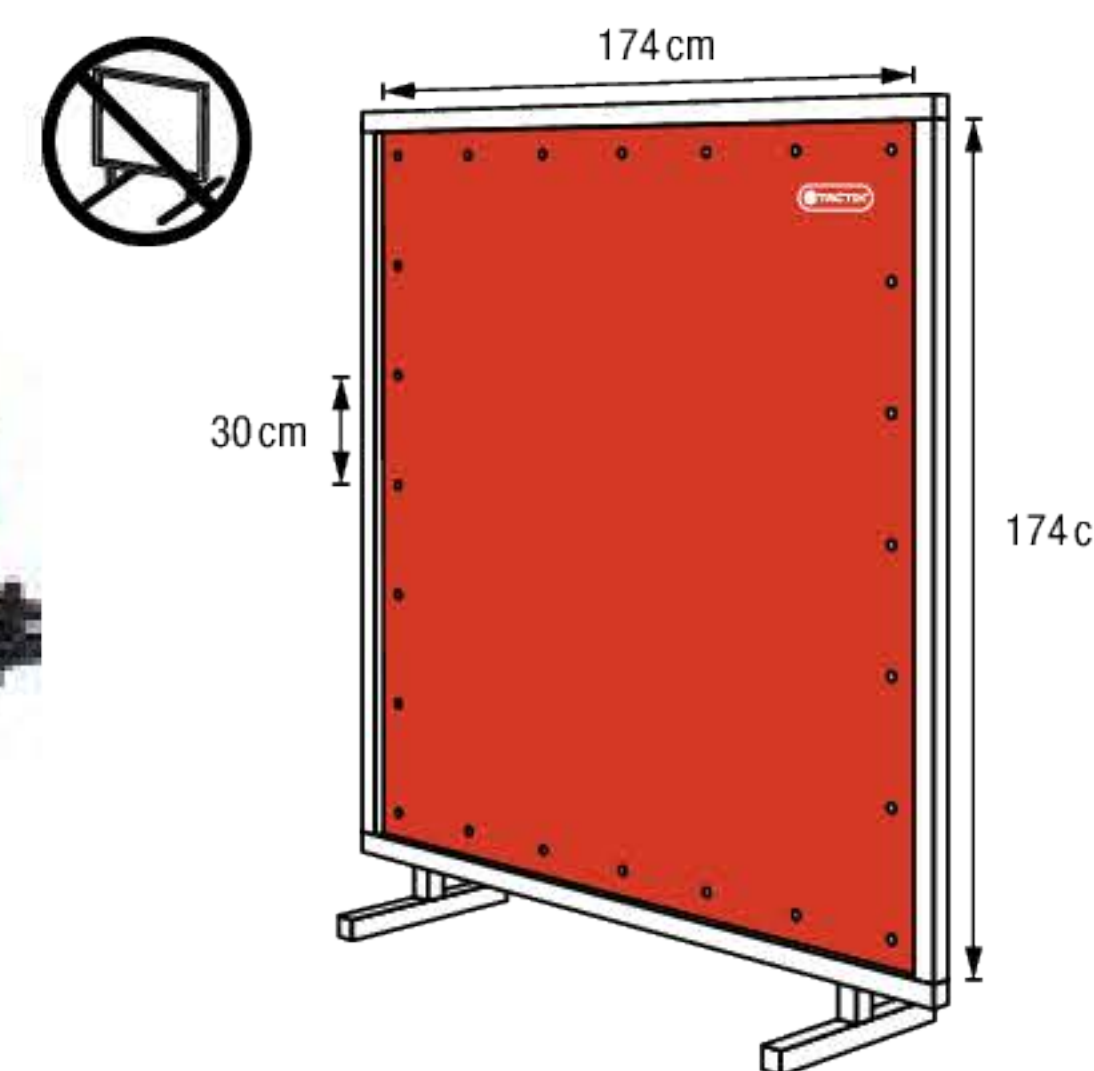

Item No.	Size	Qty	EAN	Inner	Outer
593001	174 x 174 mm	1 pc	7560 3	6	12

MILD STEEL WIRE



- Conforms AWS ER70S-6 standard
- For Gas MIG Welding
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592001	0.8 kg	0.6 mm	1 pc	7571 9	6	18

MILD STEEL WIRE



- Conforms AWS ER70S-6 standard
- For Gas MIG Welding
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592002	0.8 kg	0.8 mm	1 pc	7572 6	6	18

STAINLESS STEEL WIRE



- Conforms AWS ER-308 standard
- For Gas MIG Welding
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592003	1.0 kg	0.8 mm	1 pc	7573 3	6	18

GASLESS FLUX CORE MILD STEEL WIRE



- Conforms AWS E71T-GS standard
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592005	0.45 kg	0.8 mm	1 pc	7575 7	6	24

GASLESS FLUX CORE MILD STEEL WIRE



- Conforms AWS E71T-GS standard
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592006	0.45 kg	0.9 mm	1 pc	7576 4	6	24

ALUMINIUM WIRE



- Conforms AWS ER5356 standard
- For Gas MIG Welding
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592004	0.5 kg	0.8 mm	1 pc	7574 0	6	24

MILD STEEL WIRE



- Conforms AWS ER70S-6 standard
- For Gas MIG Welding
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592007	5 kg	0.6 mm	1 pc	7577 1	0	4
592008	5 kg	0.8 mm	1 pc	7578 8	0	4

GASLESS FLUX CORE MILD STEEL WIRE



- Conforms AWS E71T-GS standard
- Suits most popular brands of MIG Welders

Item No.	Weight	Diameter	Qty	EAN	Inner	Outer
592012	4.5 kg	0.8 mm	1 pc	7582 5	0	4
592013	4.5 kg	0.9 mm	1 pc	7583 2	0	4

TUNGSTEN RODS



- Conforms AWS A5.12
- 2% Thoriated Tungsten Electrode
- Used with DC Current to weld mild and stainless steel
- Red tip ground finish

Item No.	Diameter	Length	Qty	EAN	Inner	Outer
592015	1.6 mm	175 mm	10 pc	7585 6	12	48
592016	2.4 mm	175 mm	10 pc	7586 3	12	48

PTA DRILL BITS DISPLAY

- Maximum 24 compartments
- For bulk drill bits
- Material: 0.8 mm cold rolled steel
- Window: 3 mm transparent acrylic
- 365 x 320 x 272.5 mm
- Door & lock in the backside



(Drills not included)



Lock on the back side

Item No.	Size	EAN
454502	32 x 27 x 35.5 cm (12-1/2 x 10-1/2 x 14 in.)	69426292+ 7246 5

STEEL DISPLAY

- 24 pc hook included



(Drills not included)

Item No.	Size	EAN
454505	47 x 32 x 71 cm (18-1/2 x 12-9/8 x 27-7/8 in.)	69426292+ 7247 2

PTA QP DISPLAY BOX



Item No.	Size
QP1	59.5 x 39.5 x 100 cm (23-1/2 x 15-3/4 x 40 in.)

PTA QP DISPLAY BOX



Item No.	Size
QP2	57 x 38 x 95 cm (22-1/2 x 15 x 37-1/2 in.)

PTA QP DISPLAY BOX



Item No.	Size
QP3	56 x 43 x 77 cm (22 x 17 x 30 in.)

Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.
41000BS	7	410109BS	7	410324	7	410492	3	410720	13	411501	16
410001	3	410111	4	410346	7	410493	4	410721	13	411503	16
410001BM	6	410111BM	6	410348	7	410494	3	410723	13	411505	16
410003	3	410113	4	410350	7	410495	4	410725	13	411509	16
410005	3	410113BS	7	410352	7	410496	3	410727	13	411513	16
410005BS	7	410115	4	410354	7	410497	4	410731	13	411515	16
410007	3	410115BM	6	410356	7	410498	5	410735	13	411517	16
410009	3	410117	4	410358	7	410499	5	410736	13	411519	16
410009BM	6	410117BM	6	410360	7	410501	11	410739	13	411521	16
410009BS	7	410117BS	7	410362	7	410503	11	410744	13	411523	16
410011	3	410119	4	410364	7	410505	11	410747	13	411525	16
410011BM	6	410121	4	410370	5	410506	11	410749	13	411527	16
410013	3	410121BM	6	410370BM	6	410507	11	410753	13	411529	16
410013BS	7	410123	4	410371	5	410508	11	410757	13	411601	16
410015	3	410125	4	410371BM	6	410509	11	410761	13	411603	16
410015BM	6	410125BS	7	410372	5	410511	11	410765	13	411605	16
410017	3	410127	4	410372BM	6	410513	11	410769	13	411609	16
410017BM	6	410127BM	6	410373	5	410515	11	410771	13	411611	16
410017BS	7	410129	4	410373BM	6	410517	11	410773	13	411613	16
410019	3	410131	4	410374	5	410519	11	410779	13	411617	16
410021	3	410131BS	7	410374BM	6	410521	11	410781	13	411621	16
410021BM	6	410133	4	410375	5	410523	11	410785	13	411623	16
410023	3	410133BS	7	410376	5	410525	11	410789	13	411625	16
410023BM	6	410135	4	410376BM	6	410527	11	410793	13	411627	16
410025	3	410135BS	7	410377	5	410547	11	410797	13	411629	16
410025BS	7	410137	4	410378	5	410548	11	410799	13	411631	16
410027	3	410139	4	410379	5	410550	11	410801	13	411633	16
410027BM	6	410139BS	7	410379BM	6	410551	11	410803	13	411635	16
410029	3	410141	4	410380	5	410551BS	11	410805	13	411637	16
410031	3	410143	4	410381	5	410552	11	410807	13	411639	16
410033	3	410143BM	6	410382	5	410552BS	11	410839	13	411641	16
410033BS	7	410143BS	7	410382BM	6	410553	11	410841	13	411643	16
410035	3	410145	4	410383	5	410553BS	11	410843	13	411647	16
410035BM	6	410145BS	7	410383BM	6	410554	11	410845	13	411661	16
410037	3	410147	4	410384	5	410555	11	410847	13	411662	16
410039	3	410147BS	7	410384BM	6	410555BS	11	410849	13	411663	16
410041	3	410149	4	410385	5	410556	11	410851	13	411664	16
410041BM	6	410149BM	6	410385BM	6	410557	11	410853	13	411665	16
410041BS	7	410151	4	410386	5	410558	11	410855	13	411666	16
410043	3	410151BM	6	410386BM	6	410558BS	11	410857	13	411667	16
410043BM	6	410151BS	7	410387	5	410559	11	410901	13	411668	16
410045	3	410153	4	410387BM	6	410559BS	11	410902	13	411669	16
410047	3	410153BM	6	410388	5	410560	11	410903	13	411670	16
410047BS	7	410153BS	7	410388BM	6	410561	11	410904	13	411671	16
410049BM	6	410155	4	410389	5	410561BS	11	410950	14	411672	16
410051	3	410155BS	7	410389BM	6	410563	11	410951	13	411673	16
410051BM	6	410157BS	7	410390	5	410565	11	410953	13	411674	16
410051BS	7	410180	21	410390BM	6	410567	11	410954	13	411675	16
410053	3	410181	4	410391	5	410573	11	410955	13	411676	16
410053BM	6	410183	21	410391BM	6	410575	11	410961	14	411901	17
410055	3	410185	4	410392	5	410577	11	410962	14	411903	17
410055BS	7	410187	4	410392BM	6	410601	12	411012	14	412003	17
410056BM	6	410189	4	410393	5	410603	12	411014	14	412005	17
410057BS	7	410203	5	410393BM	6	410605	12	411016	14	412007	17
410058BS	7	410205	5	410394	5	410607	12	411018	14	412009	17
410059BS	7	410207	5	410395	5	410609	12	411020	14	412011	17
410061	3	410209	5	410395BM	6	410611	12	411022	14	412013	17
410062	3	410211	5	410396	5	410613	12	411025	14	412015	17
410062BM	6	410213	5	410396BM	6	410615	12	411028	14	412017	17
410062BS	7	410215	5	410397	5	410617	12	411030	14	412035	17
410063	3	410217	5	410397BM	6	410619	12	411054	14	412037	17
410064	3	410219	5	410411	5	410621	12	411056	14	412039	17
410065	3	410221	5	410413	5	410623	12	411058	14	412041	17
410066	3	410223	5	410414	5	410625	12	411060	14	412043	17
410068	3	410253	5	410415	5	410627	12	411062	14	412045	17
410070	3	410255	5	410416	5	410655	12	411065	14	412047	17
410072	3	410257	5	410417	5	410657	12	411068	14	412049	17
410074	3	410259	5	410418	5	410663	12	411070	14	412051	17
410076	3	410261	5	410419	5	410665	12	411072	14	412053	17
410078	3	410263	5	410421	5	410673	12	411075	14	412055	17
410080	3	410265	5	410423	5	410674	12	411080	14	412081	17
410081	3	410267	5	410425	5	410675	12	411082	14	412085	17
410082	3	410269	5	410429	5	410677	12	411085	14	412109	17
410084	3	410271	5	410433	5	410679	12	411088	14	412115	17
410085	3	410273	5	410437	5	410680	12	411090	14	412121	17
410086	3	410303	7	410441	5	410694	11	411095	14	412127	17
410087	3	410304	7	410482	3	410695	11	411103	13	412132	17
410088	3	410305	7	410483	4	410701	13	411105	13	412145	15
410089	3	410306	7	410484	3	410703	13	411106	13	412147	15
410101	4	410310	7	410485	4	410705	13	411108	13	412149	15
410103	4	410314	7	410486	3	410707	13	411110	13	412150	15
410105	4	410315	7	410487	4	410713	13	411116	13	412170	15
410107	4	410316	7	410488	5	410717	13	411118	13	412171	17
410109	4	410320	7	410489	5	410719	13	411120	13	412173	17

Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.
412190	15	418739	23	421101	8	425388	37	436019	44	440037	49
412201	18	418740	23	421102	8	425390	37	436021	44	440041	49
412207	18	418744	24	421103	8	425392	38	436023	46	440047	49
412213	18	418746	24	421104	8	425394	38	436025	46	440051	49
412219	18	418748	23	421105	8	425396	38	436101	45	440055	49
412225	18	419013	21	421106	8	425398	38	436103	45	440061	49
412239	18	419014	21	421161	8	425399	38	436105	45	440065	49
412510	18	419829P	57	421163	8	425501	33	436107	45	440067	49
412512	18	419832P	57	421301	8	425503	33	436109	45	440069	49
412516	18	419856P	57	421303	8	425505	33	436111	45	440071	49
412518	18	419857P	57	421311	8	425507	33	436115	45	440073	49
412520	18	420001	19	421313	8	425509	33	436117	45	440077	49
412522	18	420011	19	421601	8	425521	33	436201	45	440079	49
412525	18	420012	19	421603	8	425523	33	436205	45	440081	49
412530	18	420013	19	421660	8	425525	33	436207	45	440085	49
412532	18	420017	19	421905	7	425527	33	436213	46	440089	49
413001	18	420031	19	425021	32	425531	33	436215	46	440091	49
413006	18	420041	19	425023	32	425541	33	436217	46	440095	49
413110	18	420051	19	425025	32	425543	33	436251	46	440097	49
416001	9	420071	20	425029	32	425545	33	436253	46	440101	49
416005	9	420081	19	425033	32	425547	33	436257	46	440103	30
416015	9	420093	20	425051	32	425549	33	436259	46	440104	30
416017	9	420103	20	425053	32	425573	33	436261	46	440105	49
416019	9	420111	19	425055	32	425603	35	436263	46	440202	49
416027	9	420115	19	425059	32	425605	35	436265	46	440204	49
416033	9	420121	20	425063	32	425607	35	436269	47	440207	49
416035	9	420135	20	425100	32	425609	35	436271	47	440209	49
416061	10	420141	20	425103	32	426001	36	436301	47	440211	49
416063	10	420145	19	425105	32	426003	36	436303	47	440213	49
416101	18	420151	19	425109	32	426011	36	436305	47	440215	49
416103	18	420155	19	425113	32	426013	36	436313	47	440217	49
416105	18	420161	20	425151	32	426021	36	436315	47	440219	49
416107	18	420212	20	425155	32	426023	36	436351	47	440221	49
416141	18	420311	19	425157	32	434368	39	436355	47	440223	49
416143	18	420313	19	425161	32	434424	39	436363	47	440224	49
416146	18	420315	19	425165	32	434431	39	436367	47	440226	49
416149	18	420317	19	425171	31	434624	39	436381	43	440228	49
416151	18	420331	19	425173	31	434636	39	436382	43	440230	49
416201	12	420350	19	425175	31	434637	39	436385	43	440231	49
416203	12	420371	20	425177	31	434646	39	436386	43	440235	49
416205	12	420372	20	425179	31	434736	39	436401	48	440237	49
416207	12	420373	20	425181	31	434848	39	436402	48	440303	50
416209	12	420381	19	425201	34	434860	39	436403	48	440311	50
416223	12	420391	20	425202	34	434936	39	436405	48	440315	50
416225	12	420393	20	425203	34	434948	39	436410	30	440317	50
416227	12	420401	20	425205	34	434960	39	436410	48	440361	50
416229	12	420403	20	425206	34	434980	39	436431	48	440365	50
416231	12	420411	19	425211	35	435019	39	436433	48	440367	50
416241	12	420421	20	425212	35	435022	39	436435	48	440385	49
416250	12	420461	20	425213	35	435023	39	436437	48	440426	50
416252	12	421001	8	425221	34	435025	39	436439	48	440440	50
416254	12	421003	8	425222	34	435026	39	436471	48	440465	50
416256	12	421005	8	425223	34	435060	39	437001	52	440471	50
416258	12	421007	8	425225	34	435068	39	437003	52	440477	50
416260	12	421009	8	425301	37	435078	39	437005	52	440523	50
416507	18	421011	8	425303	37	435160	39	437007	52	440525	50
418011	26	421013	8	425305	37	435180	39	437008	52	440537	50
418013	26	421015	8	425307	37	435248	39	437009	52	440587	49
418014P	5	421017	8	425309	37	435260	39	437011	52	440693	49
418021	26	421019	8	425311	37	435501	40	437013	52	440695	49
418023	26	421021	8	425321	37	435503	40	437021	53	440703	49
418033	21	421023	8	425323	37	435505	40	437031	52	441016	49
418051	26	421025	8	425325	37	435509	40	437033	52	441019	49
418053	26	421027	8	425327	37	435513	40	437035	52	441020	49
418081	26	421029	8	425329	37	435515	40	437037	52	441021	49
418083	26	421031	8	425331	37	435523	40	437039	52	441022	49
418101	26	421051	8	425333	37	435601	40	437045	52	441025	49
418103	26	421053	8	425335	37	435603	40	437057	53	441026	49
418107	26	421055	8	425337	37	435605	40	437071	53	441028	49
418109	26	421057	8	425339	37	435607	40	437073	53	441030	49
418113	25	421059	8	425360	37	435609	40	437075	53	441032	49
418115	25	421061	8	425362	37	435701	40	437077	53	441035	49
418130	22	421063	8	425364	37	435703	40	437079	53	441038	49
418132	22	421065	8	425366	37	435705	40	437083	53	441040	49
418159	22	421067	8	425368	37	435707	40	437085	53	441041	49
418162	22	421069	8	425370	37	436001	44	437093	53	441042	49
418210	22	421071	8	425372	37	436003	44	440007	49	441043	49
418321	21	421073	8	425374	37	436005	44	440013	49	441045	49
418455	22	421075	8	425376	37	436007	44	440017	49	441048	49
418505	24	421077	8	425378	37	436009	44	440021	49	441051	49
418607	21	421079	8	425380	37	436011	44	440025	49	441054	49
418713	22	421081	8	425382	37	436013	44	440029	49	441058	49
418714	22	421083	8	425384	37	436015	44	440033	49	441060	49
418737	23	421100	8	425386	37	436017	44	440035	49	441064	49

Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.	Item No.	Page No.
441076	49	446219	62	446880	67	450044	59	455402	54	591027	79
445001	41	446221	62	446881	67	450045	59	455403	54	591028	79
445003	41	446223	62	446883	67	450047	59	455404	54	591029	79
445005	41	446225	62	446885	67	450048	59	455406	54	591030	79
445009	41	446227	62	446897	67	450105	59	455408	54	591031	79
445011	41	446229	62	446901	64	450107	59	455423	54	591032	78
445015	41	446231	62	446911	64	450109	59	455424	54	591041	77
445017	41	446300	63	446953	73	450131	59	455426	54	592001	80
445021	41	446301	63	446955	73	450132	59	455428	54	592002	80
445025	41	446303	63	446957	73	450133	59	455441	54	592003	80
445050	41	446305	63	446958	73	450135	59	455442	54	592004	80
445055	41	446400	63	447040	73	450136	59	455443	54	592005	80
445057	41	446401	63	447121	73	450137	59	455444	54	592006	80
445059	41	446403	63	447123	73	450138	59	455446	54	592007	80
445059TIN	42	446407	63	447125	73	450162	59	455448	54	592008	80
445063	41	446691	63	447203	70	450167	59	455604	54	592012	80
445065	41	446693	63	447204	70	450170	59	455605	54	592013	80
445065TIN	42	446695	63	447205	70	450171	59	455606	54	592015	80
445071	41	446697	63	447206	70	450172	59	455805	58	592016	80
445072	41	446701	63	447223	72	450173	59	455810	28	593001	79
445073	41	446703	63	447225	72	450207	59	455820	28	724003	78
445075	41	446705	63	447227	72	450209	59	455828P	58	724104	78
445076	41	446707	63	447229	72	450231	59	455831P	58	QP1	81
445085	41	446709	63	447243	72	450232	59	455836P	58	QP2	81